



Figure similar

auxiliary switch, on the front, 2 NO + 2 NC, 53/54, 61/62, 71/72, 83/84, current path: 1 NO, 1 NC, 1 NC, 1 NO, screw terminal, physically coded, only with contactor relays 3RH2140 and 3RH2440 combinable (according to EN 50011), multi-unit packaging, pack = 60 units

|                                                                   |                                                               |
|-------------------------------------------------------------------|---------------------------------------------------------------|
| product brand name                                                | SIRIUS                                                        |
| product category                                                  | Auxiliary switch                                              |
| product designation                                               | auxiliary switch                                              |
| design of the product                                             | Can be snapped onto front of 3RH2140/3RH2440 auxiliary switch |
| product type designation                                          | 3RH29                                                         |
| suitability for use                                               | for 3RH2                                                      |
| <b>General technical data</b>                                     |                                                               |
| insulation voltage with degree of pollution 3 at AC rated value   | 690 V                                                         |
| surge voltage resistance rated value                              | 6 kV                                                          |
| protection class IP on the front                                  | IP20                                                          |
| mechanical service life (operating cycles) typical                | 10 000 000                                                    |
| electrical endurance (operating cycles) at AC-15 at 230 V typical | 200 000                                                       |
| Substance Prohibittance (Date)                                    | 10/01/2009                                                    |
| number of NC contacts for auxiliary contacts                      |                                                               |
| • instantaneous contact                                           | 2                                                             |
| • lagging switching                                               | 0                                                             |
| number of NO contacts for auxiliary contacts                      |                                                               |
| • instantaneous contact                                           | 2                                                             |
| • leading contact                                                 | 0                                                             |
| number of CO contacts of auxiliary contacts instantaneous contact | 0                                                             |
| operational current at AC-15 at 690 V rated value                 | 1 A                                                           |
| operational current of auxiliary contacts at AC-12                |                                                               |
| • at 24 V                                                         | 10 A                                                          |
| • at 230 V                                                        | 10 A                                                          |
| operational current of auxiliary contacts at AC-14                |                                                               |
| • at 125 V                                                        | 6 A                                                           |
| • at 250 V                                                        | 6 A                                                           |
| operational current of auxiliary contacts at AC-12 maximum        | 10 A                                                          |
| operational current of auxiliary contacts at AC-15                |                                                               |
| • at 24 V                                                         | 6 A                                                           |
| • at 230 V                                                        | 6 A                                                           |
| • at 400 V                                                        | 3 A                                                           |
| operational current of auxiliary contacts at DC-12                |                                                               |
| • at 24 V                                                         | 10 A                                                          |
| • at 110 V                                                        | 3 A                                                           |
| • at 220 V                                                        | 1 A                                                           |
| operational current with 2 current paths in series at DC-12       |                                                               |
| • at 24 V rated value                                             | 10 A                                                          |

|                                                                                                                                                                                                                                                                                                           |                                                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 220 V rated value</li> <li>• at 440 V rated value</li> <li>• at 600 V rated value</li> </ul>                                                                                                   | 10 A<br>4 A<br>2 A<br>1.3 A<br>0.65 A                      |
| <b>operational current with 3 current paths in series at DC-12</b> <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 220 V rated value</li> <li>• at 440 V rated value</li> <li>• at 600 V rated value</li> </ul> | 10 A<br>10 A<br>10 A<br>3.6 A<br>2.5 A<br>1.8 A            |
| <b>operational current with 2 current paths in series at DC-13</b> <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 220 V rated value</li> <li>• at 440 V rated value</li> <li>• at 600 V rated value</li> </ul> | 10 A<br>3.5 A<br>1.3 A<br>0.9 A<br>0.2 A<br>0.1 A          |
| <b>operational current with 3 current paths in series at DC-13</b> <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 220 V rated value</li> <li>• at 440 V rated value</li> <li>• at 600 V rated value</li> </ul> | 10 A<br>4.7 A<br>3 A<br>1.2 A<br>0.5 A<br>0.26 A           |
| <b>operational current of auxiliary contacts at DC-13</b> <ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 48 V</li> <li>• at 60 V</li> <li>• at 110 V</li> <li>• at 125 V</li> <li>• at 220 V</li> <li>• at 250 V</li> </ul>                                                               | 6 A<br>2 A<br>2 A<br>1 A<br>0.9 A<br>0.3 A<br>0.3 A        |
| <b>contact reliability of auxiliary contacts</b>                                                                                                                                                                                                                                                          | 1 faulty switching per 100 million (17 V, 1 mA)            |
| <b>Ambient conditions</b>                                                                                                                                                                                                                                                                                 |                                                            |
| <b>ambient temperature</b> <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> </ul>                                                                                                                                                                                 | -25 ... +60 °C<br>-55 ... +80 °C                           |
| <b>Environmental footprint</b>                                                                                                                                                                                                                                                                            |                                                            |
| Environmental Product Declaration (EPD)                                                                                                                                                                                                                                                                   | Yes                                                        |
| Global Warming Potential [CO <sub>2</sub> eq] total                                                                                                                                                                                                                                                       | 0.92 kg                                                    |
| Global Warming Potential [CO <sub>2</sub> eq] during manufacturing                                                                                                                                                                                                                                        | 0.34 kg                                                    |
| Global Warming Potential [CO <sub>2</sub> eq] during operation                                                                                                                                                                                                                                            | 0.562 kg                                                   |
| Global Warming Potential [CO <sub>2</sub> eq] after end of life                                                                                                                                                                                                                                           | 0.017 kg                                                   |
| <b>Safety related data</b>                                                                                                                                                                                                                                                                                |                                                            |
| <b>product function</b> <ul style="list-style-type: none"> <li>• mirror contact according to IEC 60947-4-1</li> <li>• positively driven operation according to IEC 60947-5-1</li> </ul>                                                                                                                   | No<br>Yes                                                  |
| <b>Installation/ mounting/ dimensions</b>                                                                                                                                                                                                                                                                 |                                                            |
| <b>fastening method</b>                                                                                                                                                                                                                                                                                   | snap-on mounting                                           |
| <b>height</b>                                                                                                                                                                                                                                                                                             | 37.5 mm                                                    |
| <b>width</b>                                                                                                                                                                                                                                                                                              | 36 mm                                                      |
| <b>depth</b>                                                                                                                                                                                                                                                                                              | 43.7 mm                                                    |
| <b>Connections/ Terminals</b>                                                                                                                                                                                                                                                                             |                                                            |
| type of electrical connection for auxiliary and control circuit                                                                                                                                                                                                                                           | screw-type terminals                                       |
| <b>connectable conductor cross-section for auxiliary contacts</b> <ul style="list-style-type: none"> <li>• solid or stranded</li> <li>• finely stranded with core end processing</li> </ul>                                                                                                               | 0.5 ... 2.5 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup> |
| <b>type of connectable conductor cross-sections</b>                                                                                                                                                                                                                                                       |                                                            |

- for auxiliary contacts
  - solid or stranded
  - finely stranded with core end processing
- for AWG cables for auxiliary contacts

2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)  
 2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)  
 2x (20 ... 16), 2x (18 ... 14)

AWG number as coded connectable conductor cross section for auxiliary contacts

20 ... 14

## Approvals Certificates

### General Product Approval



[Confirmation](#)



### General Product Approval

#### EMV

#### Test Certificates

#### Marine / Shipping



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



### Marine / Shipping

### other



[Confirmation](#)

### other

### Railway

### Environment

[Miscellaneous](#)

[Special Test Certificate](#)



## Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RH2911-1GA22-Z W98>

Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RH2911-1GA22-Z W98>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RH2911-1GA22-Z W98>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RH2911-1GA22-Z W98&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RH2911-1GA22-Z W98&lang=en)

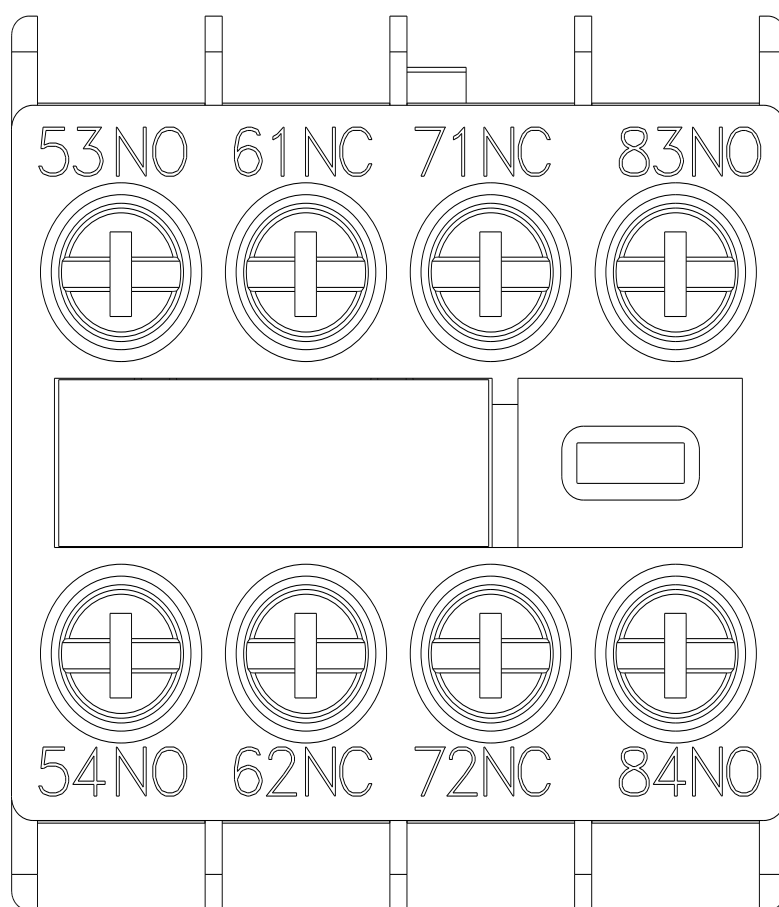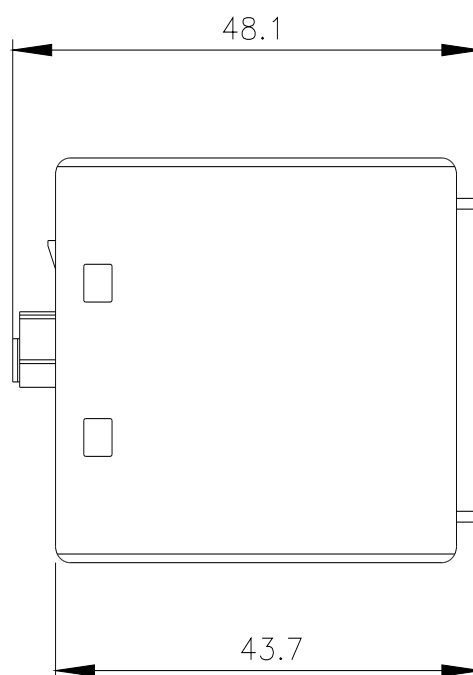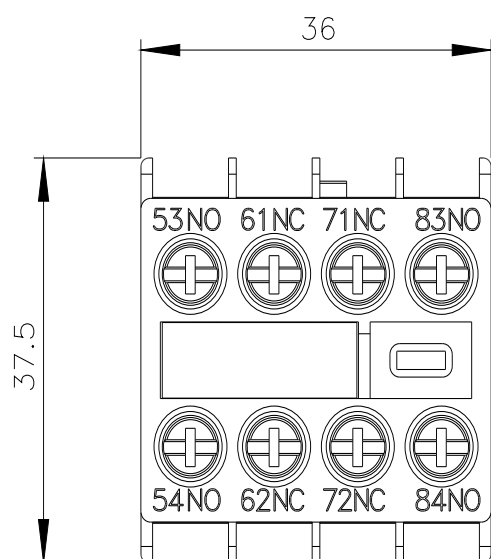

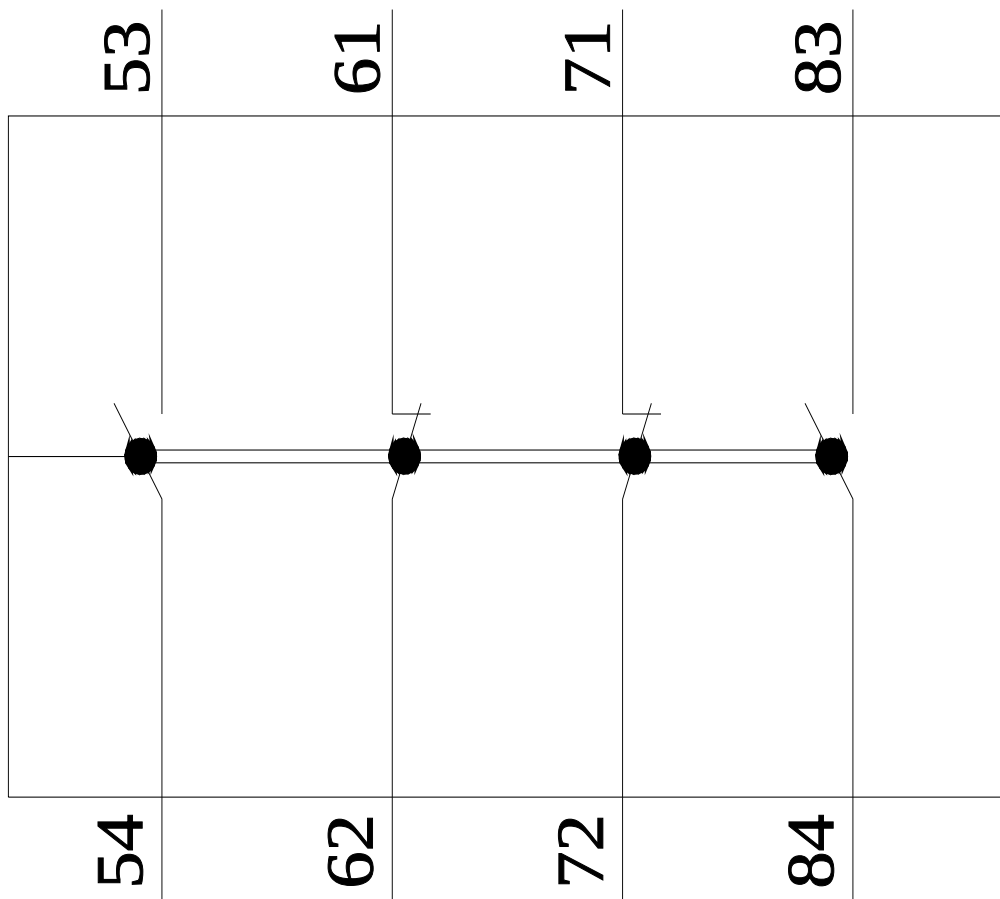

last modified:

1/23/2024 