



MOTOR STARTER ECOFAST RSE 4DI PROFIBUS DP
MECH. SWITCHING ELECTR. UE PROTECTION 3-PH 400
V/1.1 KW 0.30 A...3.00 A WITHOUT BRAKE CONTACT 4DI
24 V DC HAN Q4/2 - HAN 1NC

General details:		
Design of the product		reversing starter
Product function / bus-communication		Yes
Protocol / is supported / PROFIBUS DP protocol		Yes
Protocol / is supported / AS interface protocol		No
Product component / outlet for enine brake		No
Type of assignment		1
Reference code / according to DIN EN 61346-2		Q
Reference code / according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		A
Width	mm	130
Height	mm	250
Depth	mm	107

Control circuit:		
Type of voltage		DC
Control supply voltage		
• for DC / rated value / minimum	V	20.4
• for DC / rated value / maximum	V	28.8

Main circuit:		
---------------	--	--

Type of the motor protection		solid-state
Design of the switching contact		mechanical
Design of the short-circuit protection		fuse
Operating voltage / rated value		
• minimum	V	400
• maximum	V	500
Service power		
• at AC-3 / at 400 V / rated value	W	1,100
• for three-phase servomotors / at 400 V / at 50 Hz / minimum	kW	0.14
• for three-phase servomotors / at 400 V / at 50 Hz / maximum	kW	1.1
Adjustable response current / of the current-dependent overload release		
• initial value	A	0.3
• final value	A	3
Breaking capacity limit short-circuit current (Icu) / at 400 V / rated value	kA	100

Connection type:

Design of the electrical connection / for main current circuit	tab terminals
--	---------------

Ambient conditions:

Protection class IP	IP65
Ambient temperature	
• during operating	°C -20 ... +40

Certificates/approvals:

General Product Approval



[Type Test Certificates/Test Report](#)

other



Profibus

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)


<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator

<http://www.siemens.com/cax>

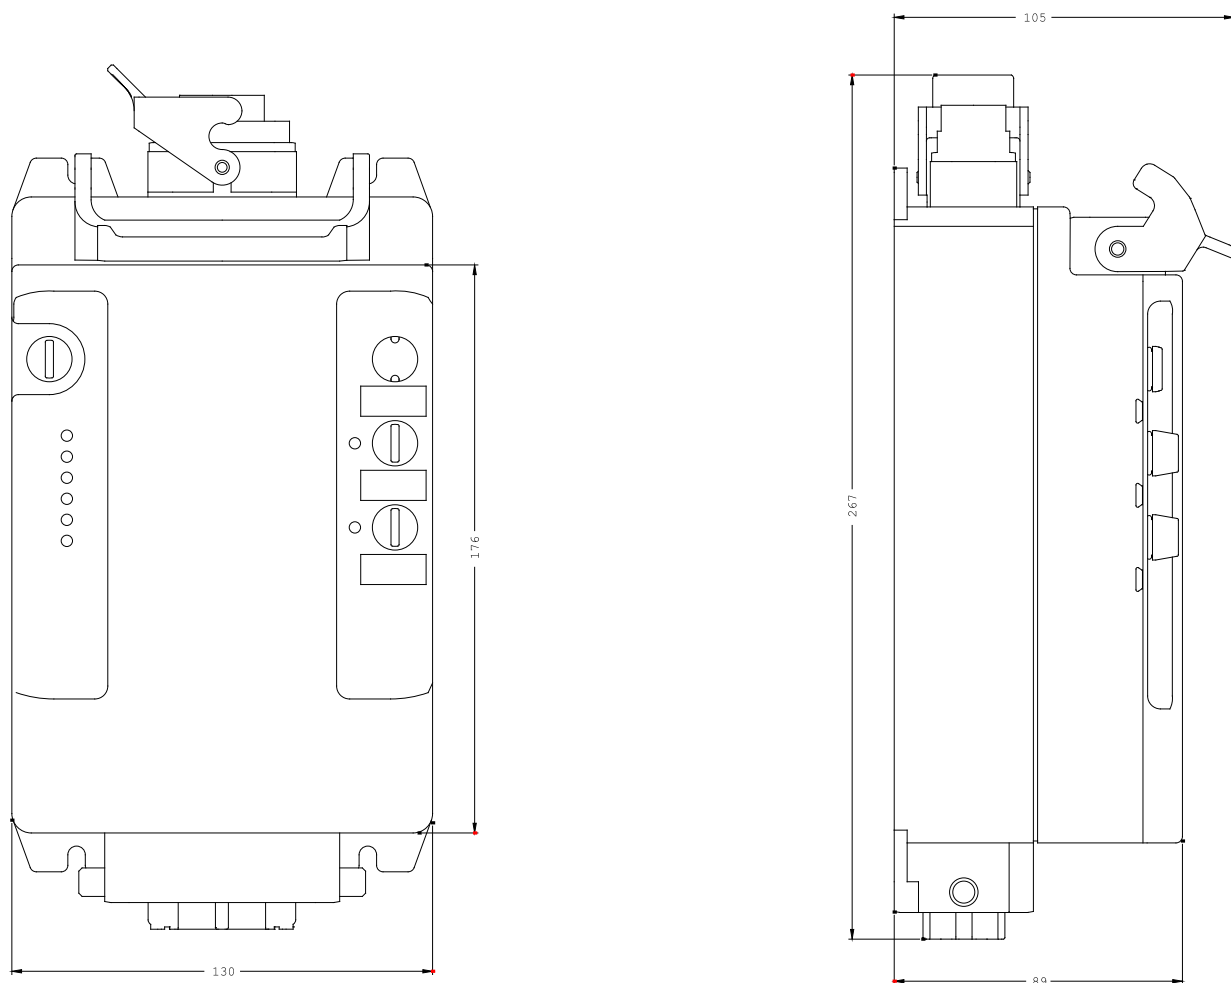

last change:

Jul 21, 2014