



AS-INTERFACE FUNCTION MODULE LOGO! STANDARD
SLAVE IP20 4DI/4DO

General technical data:		
Design of the product		AS-Interface connection for LOGO!
Type		4 inputs (virtual) / 4 outputs (virtual)
Design of the slave type		standard slave
Supply voltage		
• DC	V	24
Status display		
• display of AS-Interface/diagnostics		green/red dual LED
Inputs:		
Number of digital inputs		4
Outputs:		
Number of digital outputs		4
Ambient conditions:		
Ambient temperature		
• during operating	°C	0 ... 55
Protection class IP		IP20
Mechanical design:		
Width	mm	36

Height	mm	90
Depth	mm	58
Type of mounting		on standard rail

Certificates/approvals:

General Product Approval



CSA



GOST



UL

Test Certificates

[Special Test Certificate](#)

Shipping Approval



ABS



DNV



LRS



PRS



RINA

other

[Confirmation](#)

[Declaration of Conformity](#)

[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK1400-OCE10-0AA2/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RK1400-OCE10-0AA2

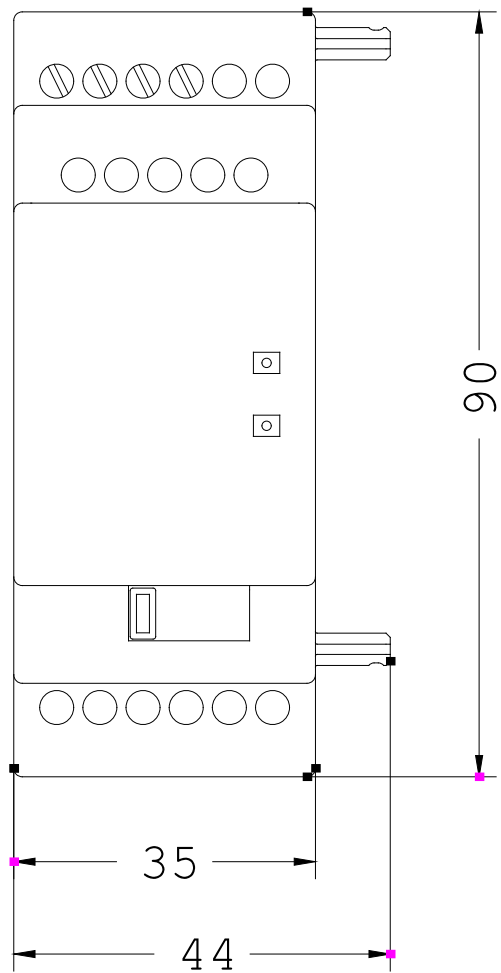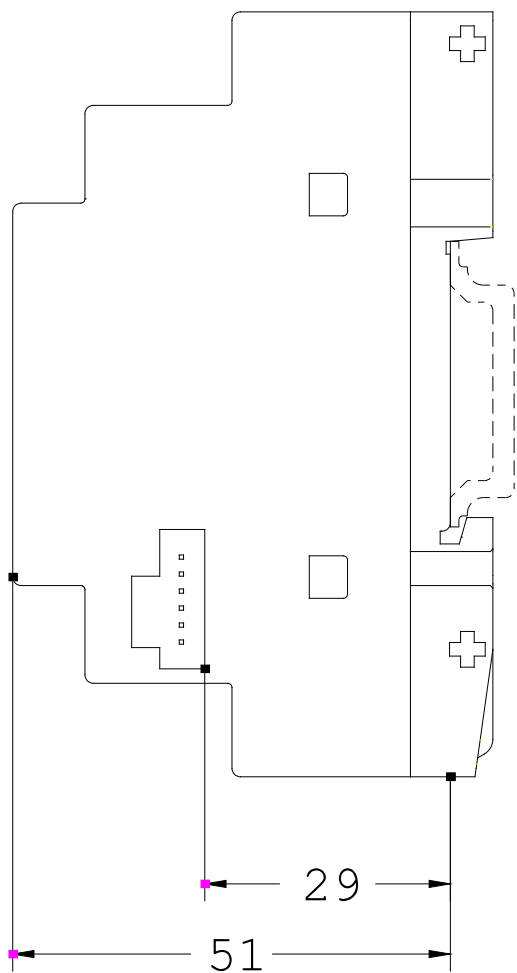

last change:

Mar 27, 2012