



ASISAFE MODULE S22,5F TWO SAFE INPUTS 2FDI AND TWO STANDARD OUTPUTS 2DO SPRINGLOADED TERMINAL

General technical data:		
Design of the product		Safe SlimLine module S22,5F, 2F-DI/2DO
Type		2 inputs, safe, 2 outputs, standard
I/O configuration		7
ID/ID2 code		B/F
Protocol / is supported / AS interface protocol		Yes
Design of the electrical connection / of the inputs and outputs		spring-loaded terminals
operating voltage		
• according to AS-Interface spezifikation	V	26.5 ... 31.5
AS interface / total current input / max	mA	250
Addressing		front addressing socket
Reference code		
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		A
• according to DIN EN 61346-2		A

Inputs:		
Number of digital inputs / safety-related		2
Inputs		
• sensors		mechanical switching contact
• switching level High		contact closed

• switching level Low		contact open
Input current / at the digital input / for signal <1> / minimum	mA	5
Outputs:		
Number of digital outputs		2
Voltage type / of output voltages		DC
Outputs / external power supply 24 V DC		via AS-Interface
Design of the switching output		solid state
Characteristic feature of the output / short-circuit protected		Yes
Outputs		
• short-circuit protection		built-in
• induction protection		built-in
• watchdog		built-in
Status display		
• display of I/Os		yellow LED
• display of AS-Interface/diagnostics		green/red LED
Ambient conditions:		
Ambient temperature		
• during operating	°C	-25 ... +70
• during storage	°C	-40 ... +85
Protection class IP		IP20
Mechanical design:		
Width	mm	22.5
Height	mm	103.4
Depth	mm	91
Mounting type		standard rail mounting/wall mounting

General Product Approval

Functional Safety / Safety of Machinery



Declaration of Conformity



EG-Konf.

Shipping Approval



other

[Confirmation](#)

[Declaration of
Conformity](#)

[other](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK1405-0BG00-0AA2/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RK1405-0BG00-0AA2

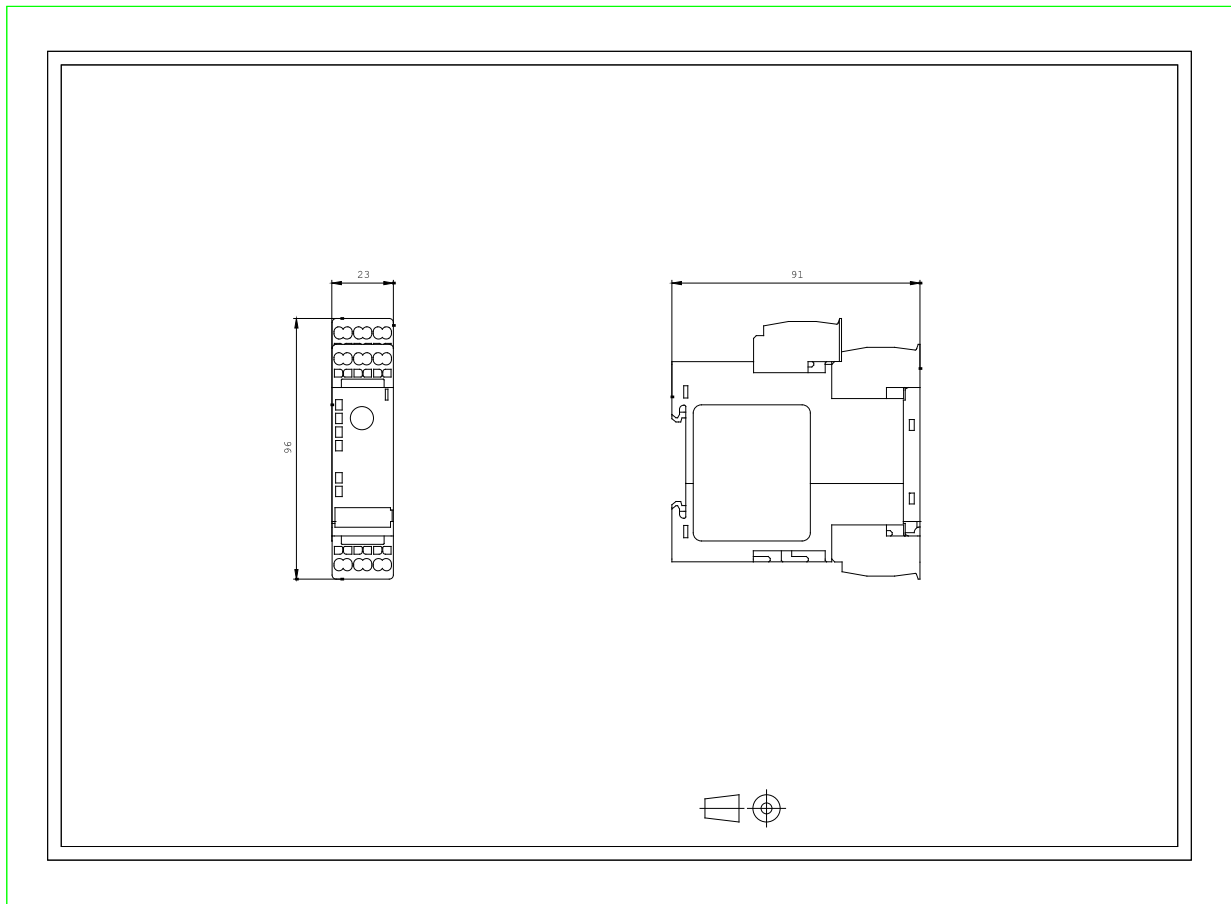

last change:

Jul 21, 2014