



AS-INTERFACE ACCESSORIES EXTENSION PLUG
DOUBLING THE CABLE LENGTH TO 200 M PER AS-
INTERFACE SEGMENT DEG. OF PROTECTION IP67
CONNECTION VIA AS-INTERFACE M12 FEEDER
3RX9801-0AA00 (HAS TO BE ORDERED SEPARATELY)

General technical data:

Design of the product		AS-Interface Extension Plug
Design of the slave type		no slave integrated
Voltage supply / using AS-Interface		Yes

Operating voltage

• according to AS Interface specification	V	26.5 ... 31.6
---	---	---------------

Status display

• LED on / supply voltage	V	26.5 ... 31.6
• LED flashes / supply voltage	V	10 ... 26.5
• U AS-Interface		green LED

Connections:

Design of the AS-Interface connection		Connection via AS-Interface M12 feeder 3RX9801-0AA00
AS interface		
• Connection / Polarity reversal protection		yes
• total current input / max	mA	10
AS-Interface bus connection / pin assignment		
• PIN1		U AS-Interface +

• PIN3

U AS-Interface -

Ambient conditions:

Ambient temperature

• during operating

°C

-25 ... +85

Protection class IP

IP67

General Product Approval

Shipping Approval



other

[Confirmation](#)

[Declaration of
Conformity](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK1901-1MX00/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RK1901-1MX00

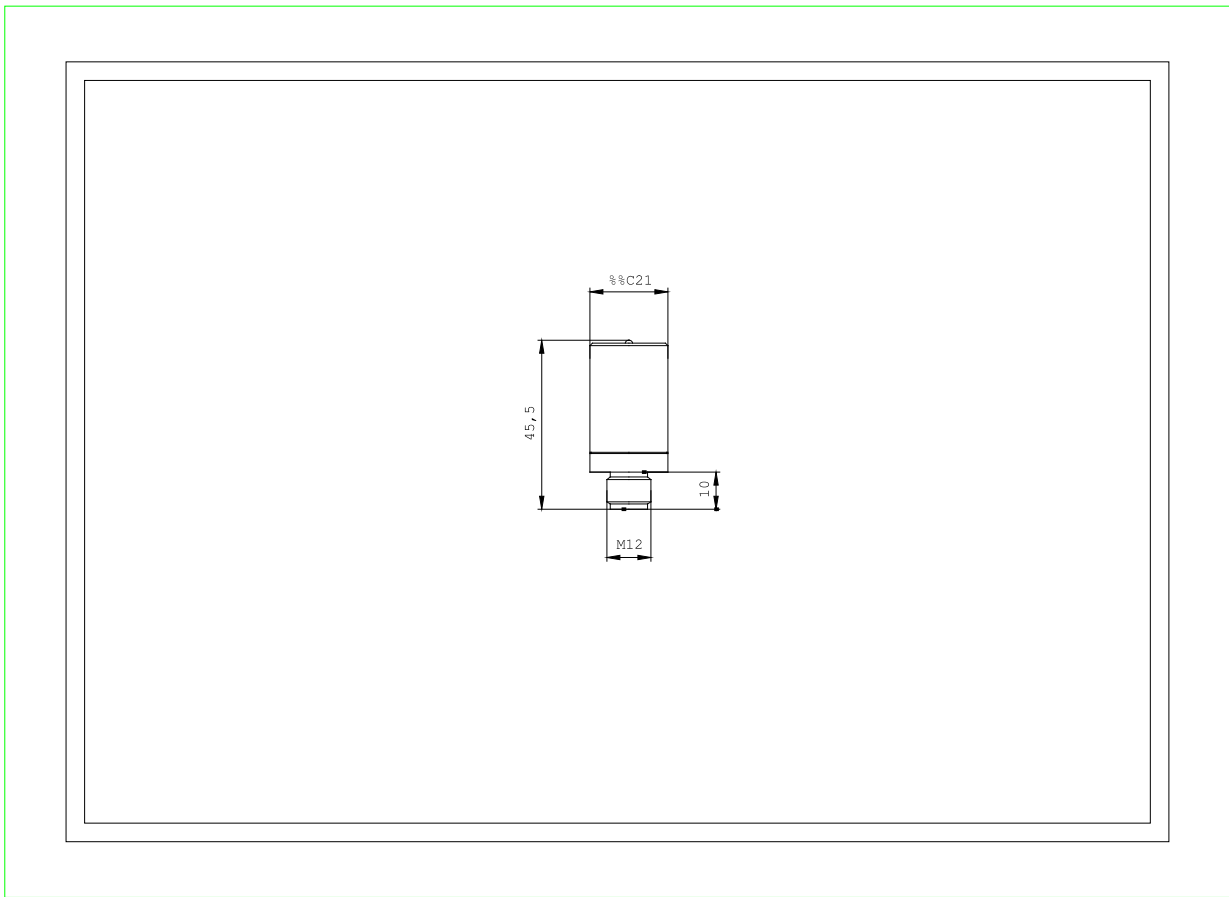

last change:

Aug 4, 2014