

AS-INTERFACE ACCESSORIES EXTENSION PLUG
DOUBLING THE CABLE LENGTH TO 200 M PER AS-
INTERFACE SEGMENT DEG. OF PROTECTION IP67
DIRECT CONNECTION TO AS-INTERFACE PROFILE
CABLE

General technical data:

Design of the product		AS-Interface extension plug compact
Design of the slave type		no slave integrated
Voltage supply using AS-Interface		Yes
Operating voltage acc. to AS Interface specification	V	26.5 ... 31.6
Status display		none
U AS-Interface		

Connections/ Terminals:

Design of the AS-Interface connection		Direct connection to AS-i ribbon cable
AS interface		
Connection Polarity reversal protection		yes
total current input max	mA	15

Ambient conditions:

Ambient temperature during operation	°C	-25 ... +70
Protection class IP		IP67

Certificates/ approvals:

General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity	Shipping Approval
--------------------------	---------------------------------------	---------------------------	-------------------



[sonstig](#)



EG-Konf.



ABS



DNV



PRS

Shipping Approval	other
-------------------	-------



RMRS

[Umweltbestätigung](#)

[Bestätigungen](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK19011MX02>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK19011MX02>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK19011MX02&lang=en

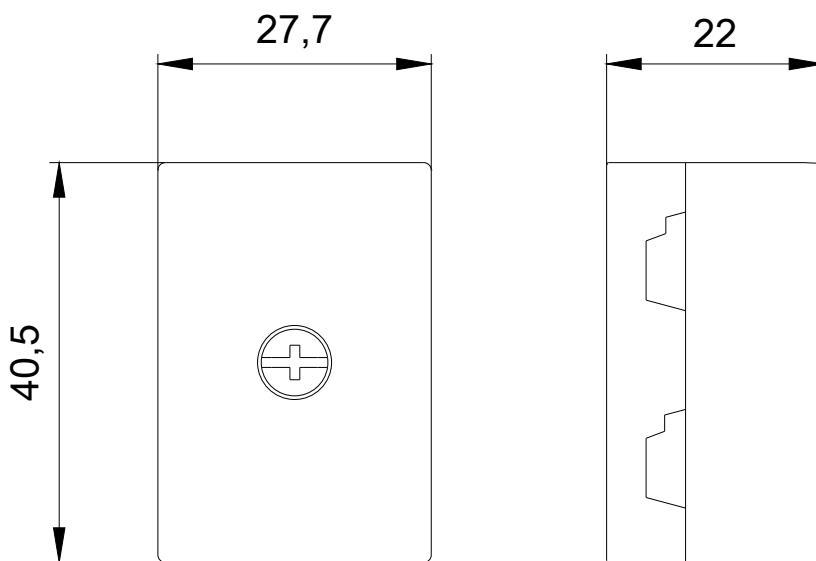

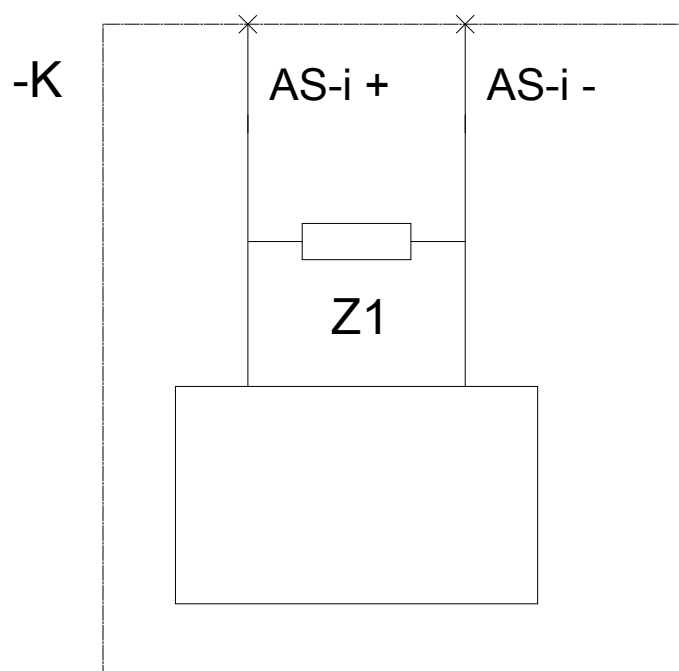

last modified:

31.03.2016