

AS-INTERFACE DISTRIB. COMPACT FOR CREATING
NETWORK STRUCTURES BRANCHES,
DISCONNECTION, IP 67/68/69K, MAX. 8A



General technical data:

Type of device		AS-Interface accessories
Design of the product		AS-i compact distribution boards
Function		distribution function for AS-i flat cables
operating voltage		
• according to AS-Interface specification	V	26.5 ... 31.6
Note		cable must not end in the distribution board
Note 1		cable must not end in the distribution board

Connections:

connection		insulation piercing method for AS-Interface flat cable
Connection system		insulation piercing method for AS-Interface flat cable

Mechanical design:

Type of mounting		screw fixing
Contacts / Load rating / max	A	8

Ambient conditions:

ambient temperature	°C	-25 ... +75
ambient temperature / when stored	°C	-25 ... +85
degree of protection		IP67/68/69K

Certificates/approvals:

General Product Approval



Shipping Approval



other

[Confirmation](#)

[Declaration of
Conformity](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator




<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK1901-1NN10/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RK1901-1NN10

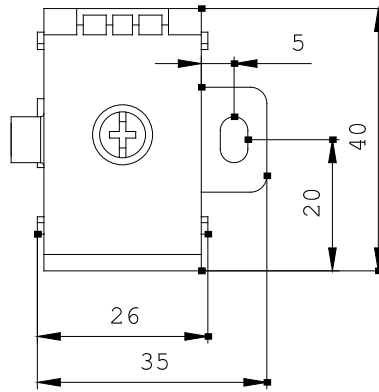



last change:

Jul 7, 2014