

TM-XB215 S24-01 FOR ET200S MOTOR STARTER FOR BRAKE MODULES XB3/XB4/XB6 TERMINAL MODULE FOR MOUNTING FOR BRAKE CONTROL MODULE TO THE RIGHT OF RS1-X, DS1-X RS1E-X, DS1E-X, F-DS1E-X, F-RS1E-X DSS1E-X WITHOUT XB4/6

General technical data:

Product designation		Terminal module
Product-type designation		TM-xB215 S24-01
Design of the product		for brake control modules xB3, xB4, xB6
Mounting height	mm	196.5
Installation width	mm	15
Mounting depth	mm	95
Protection class IP		IP20
Impulse voltage resistance / rated value	V	8,000
Operating current / rated value	A	4
Type of the connectable conductor cross-sections		
• solid		1x (0.14 ... 2.5 mm ²)
• finely stranded / with wire end processing		1x (0.14 ... 1.5 mm ²), acc. to IEC 60947
• for AWG conductors		
• solid		1x (18 ... 22)
• stranded		1x (18 ... 22)

Mounting/fixing:

Dimension de la tête de tournevis		Standard screwdriver Size 1
Tightening torque		
• with screw-type terminals	N·m	0.4 ... 0.7

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)


<http://www.siemens.com/industrial-controls/mall>

Cax online generator:

<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK1903-0AG01/all>

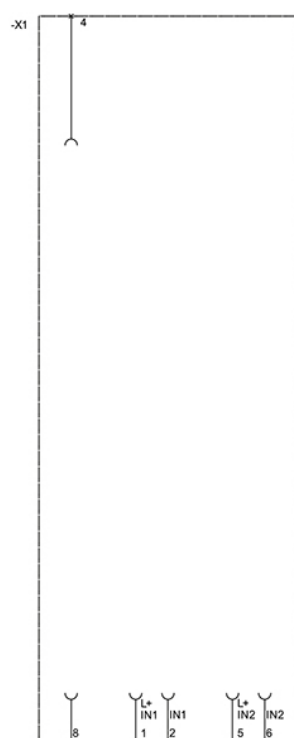

last change:

Mar 5, 2013