



2DI 24VDC LC COM CONTROL MODULE FOR ET200S
HIGH FEATURE STARTER FOR ET 200S FAILSAFE
STARTER FOR LOCAL INPUT FUNCTIONS OR F.
MANUAL OPERATION WITH COM INTERFACE FOR PC
CABLE 6ED1057-1AA00-0BA0

General technical data:

Product designation		Control module 2DI 24 V DC COM
Product description		digital input module with two inputs for local motor starter functions for front mounting
Mounting height	mm	45
Installation width	mm	23.8
Mounting depth	mm	23
Type of the connectable conductor cross-sections		
• solid • finely stranded / with wire end processing • for AWG conductors • solid • stranded		1x (0.14 ... 2.5 mm ²), acc. to IEC 60947 2x (0.14 ... 1) 1x (18 ... 22) 1x (18 ... 22)
Number of digital inputs		2
Ambient temperature		
• during storage • during operating	°C	0 ... 60
	°C	-40 ... +80

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK1903-0CH20/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RK1903-0CH20

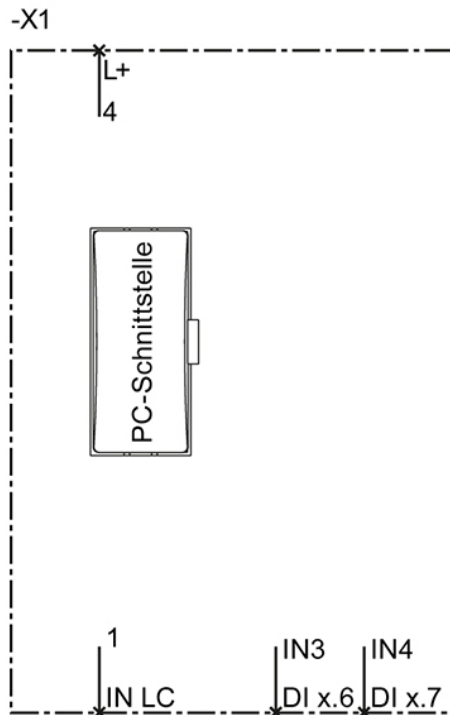

last change:

Oct 21, 2013