


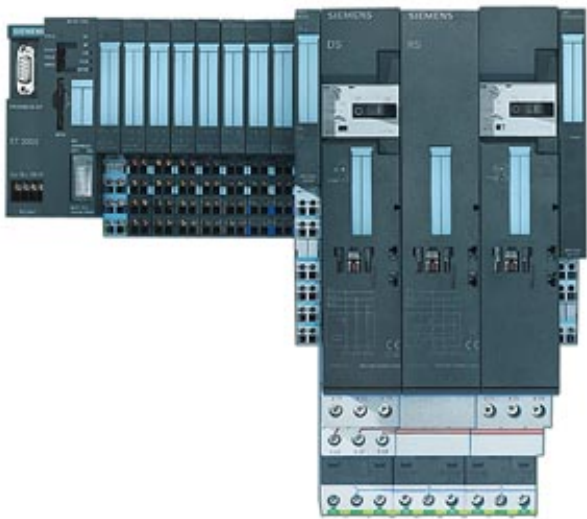

TM-PF30 S47-D0 TERMINAL MODULE FOR CONTACT MULTIPLIER PM-D F5, FOR ACTUATOR CONNECTION, FOR MAX. 4 SINGLE-CHANNEL ACTUATORS FOR MAX. 2 2-CHANNEL ACTUATORS

General technical data:		
Product designation		Terminal module
Product-type designation		TM-PF30 S47-D0 for PM-D F5
Design of the product		for contact multiplier
Mounting height	mm	196.5
Installation width	mm	30
Mounting depth	mm	102
Protection class IP		IP20
Insulation voltage / rated value	V	500
Operating voltage		
• for DC / rated value	V	24
Operating current / rated value	A	10
Type of the connectable conductor cross-sections		
• solid		1x (0.14 ... 2.5 mm²)
• finely stranded / with wire end processing		1x (0.14 ... 1.5 mm²), acc. to IEC 60947
• for AWG conductors		
• solid		1x (18 ... 22)
• stranded		1x (18 ... 22)
Mounting/fixing:		
Dimension de la tête de tournevis		Standard screwdriver Size 1

Tightening torque

- with screw-type terminals

N·m

0.4 ... 0.7

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:

<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK1903-1AD10/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RK1903-1AD10

last change:

Mar 5, 2013