



PM-D F PROFISAFE POWER MODULE FOR
FAILSAFE MOTOR STARTER, FOR FAILSAFE
CONTACT MULTI- PLIER, W. 6 TRIPPING GROUPS
FOR PROFIBUS OR PROFINET PLUGABLE ONTO
TM-PF30 S47-F1 FOR F-FREQUENCY CONVERTERS
30MM

Figure similar

General technical data:		
product brand name		Safety Module PROFIsafe
Product designation		PM-D F PROFISAFE
Protection class IP		IP20
Product function		
• Bus communication		Yes
• Short circuit protection		No
Operating current at 400 V rated value	A	6
SIL Claim Limit (subsystem) acc. to EN 62061		3
Category acc. to EN ISO 13849-1		4
Control circuit/ Control:		
Type of voltage of the control supply voltage		DC
Control supply voltage at DC		
• rated value	V	24
• rated value	V	26.4 ... 21.6
Installation/ mounting/ dimensions:		

Width	mm	30
Height	mm	196.5
Depth	mm	117.5

Certificates/ approvals:

General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity
--------------------------	---------------------------------------	---------------------------



[Baumusterprüfbesc
heinigung](#)

[Baumusterbescheini
gung](#)

[sonstig](#)



Shipping Approval	other
-------------------	-------



GL

[Bestätigungen](#)

[Umweltbestätigung](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1903-3BA02>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1903-3BA02>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1903-3BA02&lang=en

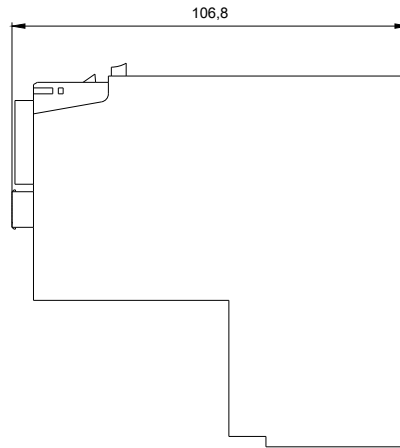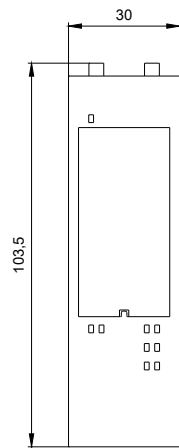

3RK1903-3BA02_ALL

last modified:

10/07/2016