



FOR ET200S SOLUTION PROFISAFE F-CM FAILSAFE
CONTACT MULTI-PLIER,
W. 4 FLOATING CONTACTS,
2A DC-13 TO 24V FOR COUPLING W. SEPARATE
SAFETY CIRCUITS PLUGABLE ONTO TM-FCM30 S47-E0
EXPANSION F. PM-DFX1 OR PM-DF PROFISAFE 30MM

General technical data:

product brand name		Local Safety Modules
Product designation		F-CM FAILSAFE
Protection class IP		IP20
Product function		
• bus-communication		Yes
• short circuit protection		No
Operating current / at 400 V / rated value	A	2
SIL claim limit (for a subsystem) / according to EN 62061		3
Category / according to EN ISO 13849-1		4
Electrical operating cycles as operating time / typical		200,000
Mechanical operating cycles as operating time / typical		10,000,000

Control circuit/ Control:

Voltage type / of control feed voltage		DC
Control supply voltage / for DC / rated value	V	24
Control supply voltage / for DC		
• rated value	V	26.4 ... 21.6

Installation/ mounting/ dimensions:

Width	mm	30
-------	----	----

Height	mm	196.5
Depth	mm	117.5

Certificates/ approvals:

General Product Approval

Declaration of Conformity

Test Certificates



[Type Test
Certificates/Test
Report](#)

other

[Confirmation](#)

[Declaration of
Conformity](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK1903-3CA00/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RK1903-3CA00

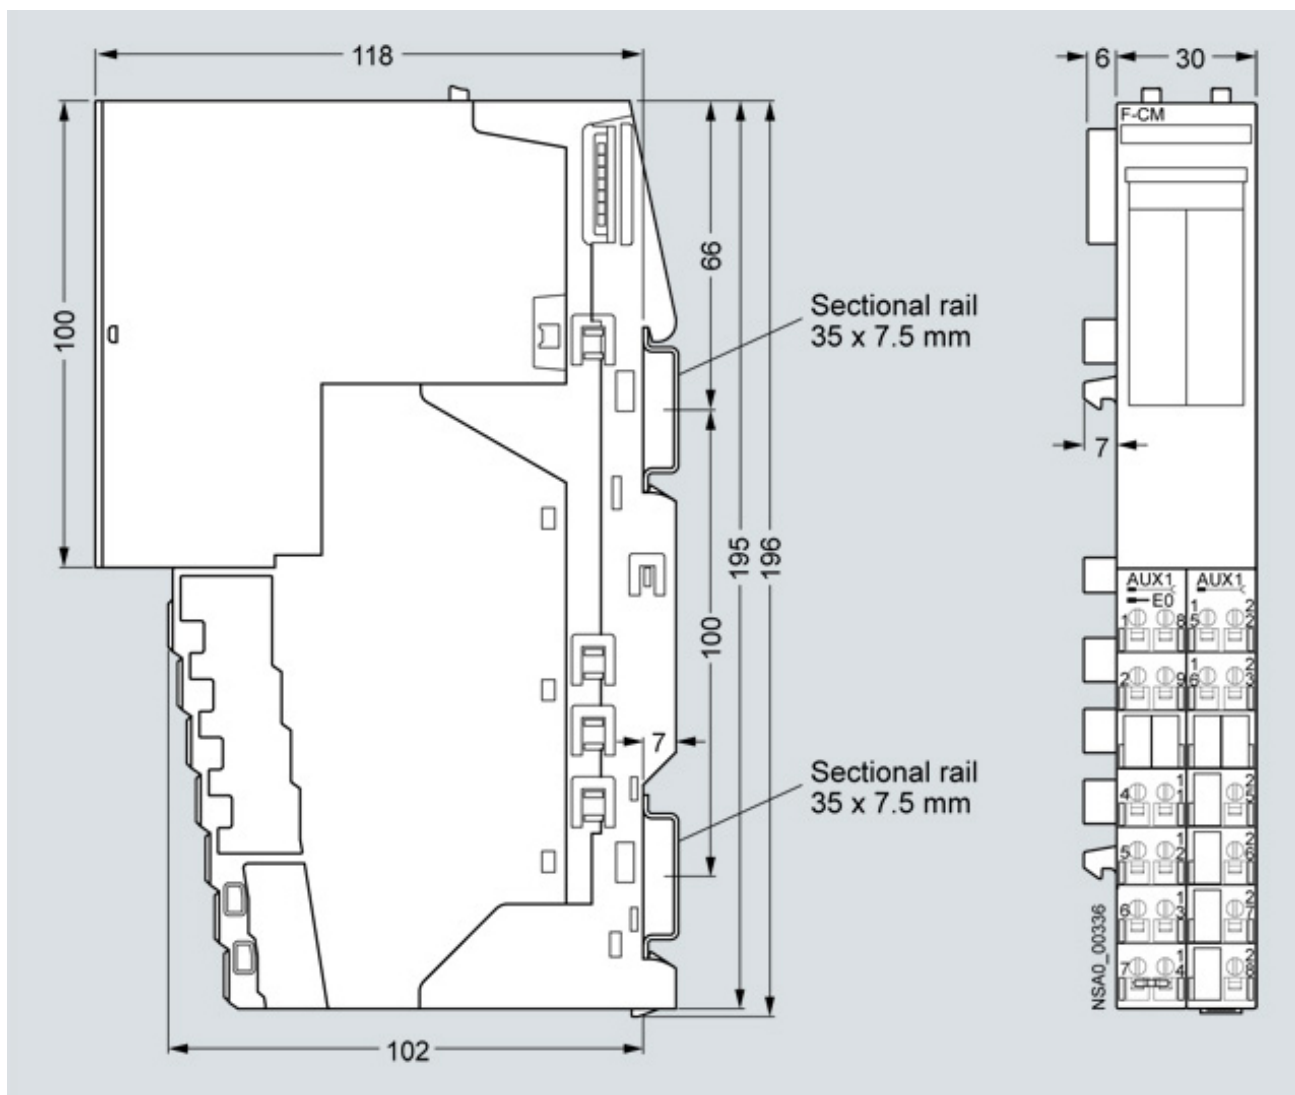

last change:

Jul 7, 2014