

BU cover 30 mm for ET 200SP motor starter for protection of empty slots



(product category)	Accessories
Product designation	Base Unit cover 30 mm
Design of the product	for protection of empty slots, 30 mm
Product type designation	BaseUnit cover

General technical data	
• (product function)	Zubehör
Degree of pollution	2
Protection class IP	IP20
Shock resistance	6g / 11 ms

Installation/ mounting/ dimensions	
• (mounting position)	vertical, horizontal, flat
• (mounting type)	pluggable on BaseUnit
(height)	135 mm
Width	30 mm
Depth	60 mm

Ambient conditions	
Ambient temperature	
• during operation	-25 ... +60 °C

- during storage
- during transport

-40 ... +70 °C

-40 ... +70 °C

Certificates/approvals

General Product Approval			EMC	Declaration of Conformity	
 CSA	 UL		 C-Tick	 EG-Konf.	Miscellaneous

Test Certificates	Marine / Shipping			other
Type Test Certificates/Test Report	 ABS	 LRS	 DNVGL.COM/AF	Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1908-1CA00-0BP0>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1908-1CA00-0BP0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1908-1CA00-0BP0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1908-1CA00-0BP0&lang=en

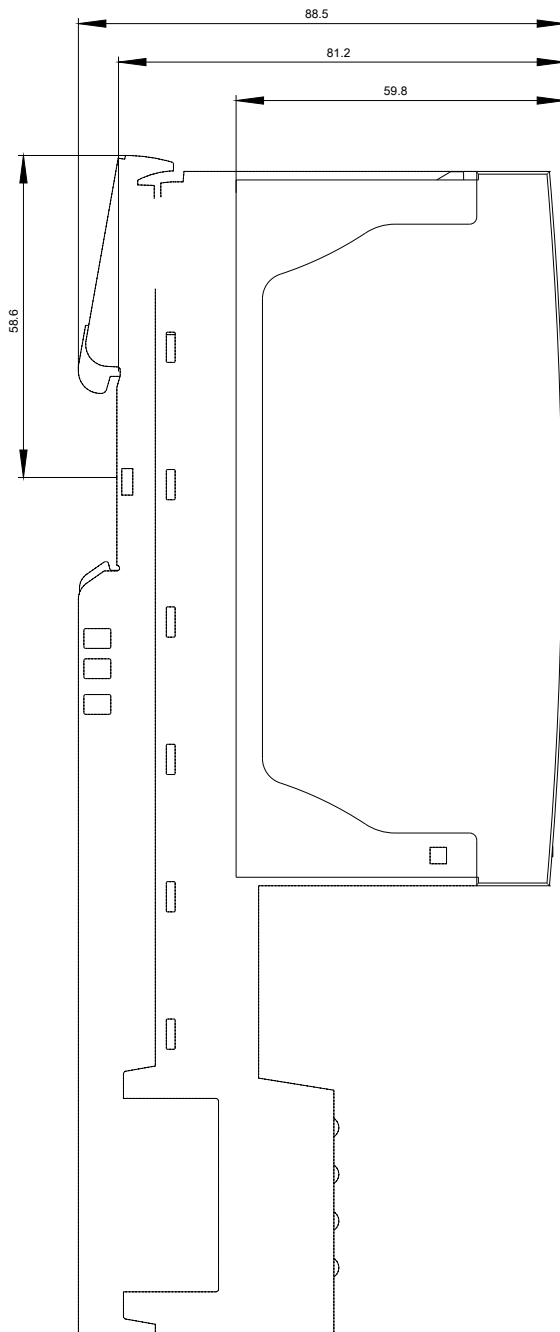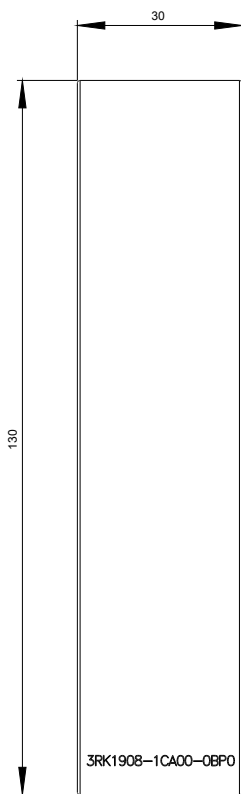

last modified:

04/18/2019