

AS-INTERFACE CONTROL CABINET MODULE SLIMLINE
S22.5 A/B SLAVE IP 20 4DI <=270MA SPRING-LOADED
TERMINAL

General technical data:

Design of the product		SlimLine S22.5 - I/O modules for operation in the control cabinet, IP20
Design of the slave type		A/B slave
Type		4 inputs
I/O configuration		0
ID/ID2 code		A/0
Protocol / is supported / AS interface protocol		Yes
AS interface / total current input / max	mA	270
operating voltage		
<ul style="list-style-type: none"> • according to AS-Interface specification 	V	26.5 ... 31.6
Addressing		front addressing socket
Design of the electrical connection / of the inputs and outputs		spring-loaded terminals
Reference code		
<ul style="list-style-type: none"> • according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 • according to DIN EN 61346-2 		A K
note		An external additional supply (AUX POWER) of 20 to 30 V DC is required for the supply of the output circuits. The additional supply must comply with VDE 0106 (PELV), protection class III.
Note 1		detachment tool for spring-loaded terminal connection: See Accessories

Sensor supply:

Type of voltage supply / for the sensor supply		using AS-Interface
Input voltage	V	20 ... 30
Characteristic feature of the sensor supply / short-circuit and overload resistant		Yes
Current carrying capacity / of the sensor supply / for all inputs		
<ul style="list-style-type: none"> • at ambient temperature 40 °C 	mA	200

Inputs:

Number of digital inputs		4
Type of connection		2- and 3-wire technology

Input circuit		PNP transistor
Type of / input voltages		DC
Inputs / switching level High / min	V	10
Input current / at the digital input		
• for signal <1> / minimum	mA	5
• at signal <0> / maximum	mA	1.5
Inputs / sensor supply using AS-Interface		short-circuit and overload resistant

Outputs:

Number of digital outputs		0
Output voltage / at 24 V		
• for DC	V	22 ... 24

Status display

• display of I/Os		yellow LED
• AS-Interface		green LED
• FAULT		red LED

Assignment of data bits

• D0		IN1
• D1		IN2
• D2		IN3
• D3		IN4

Ambient conditions:

Ambient temperature		
• during operating	°C	-25 ... +70
• during storage	°C	-40 ... +85
Protection class IP		IP20

Mechanical design:

Width	mm	22.5
Height	mm	103
Depth	mm	86
Mounting type		35 mm standard rail mounting or wall mounting using push-in lugs
Conductor cross-section		
• solid		2 x (0.25 - 1.5) mm ²
• finely stranded		
• with end sleeve		2 x (0.25 - 1) mm ²
• without end sleeve		2 x (0.25 - 1.5) mm ²
• AWG / solid or stranded		AWG 2 x (24 - 16) mm ²

Certificates/approvals:

AS-Interface certificate	yes (or requested for in case of new units)
Approvals	UL, CSA, shipbuilding (or requested for in case of new units)

General Product Approval



Shipping Approval



other

[Confirmation](#)

[Declaration of
Conformity](#)

[other](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK2200-0CG02-0AA2/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RK2200-0CG02-0AA2

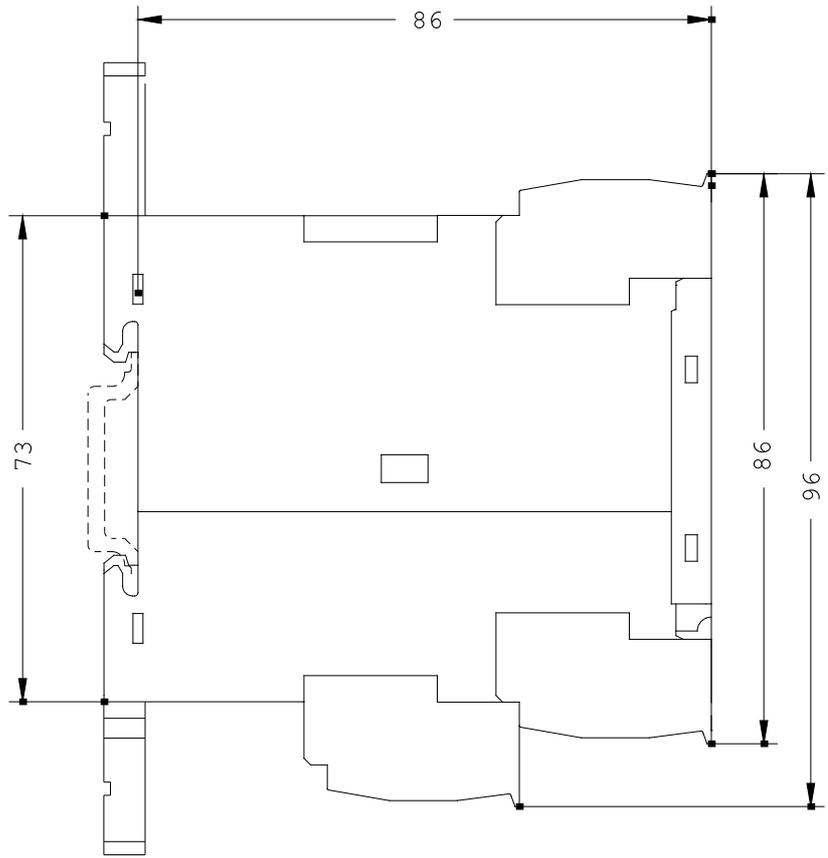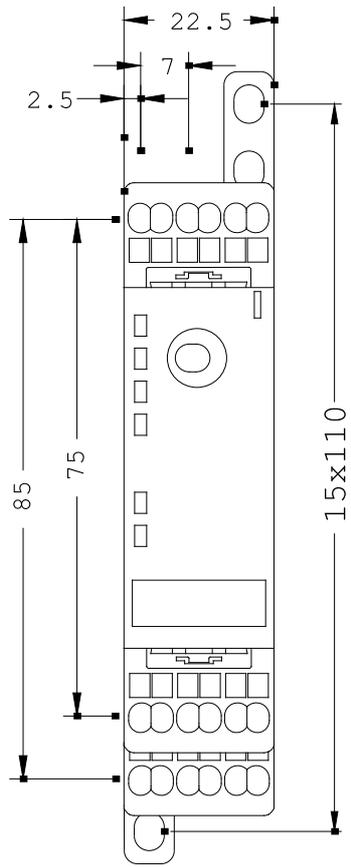

last change:

Jul 21, 2014