

AS-i SlimLine Compact module SC22.5 digital, A/B slave 4 DI, IP20 4 x inputs for 3-wire sensor Sensor supply can be switched over Screw terminals Width 22.5 mm



Product designation	Slimline Compact I/O module for use in the control cabinet
Design of the product	AS-i SC22.5, 4DI A/B, 3-wire
General technical data	
Protection class IP	IP20
Design of the slave type	A/B slave
AS interface slave profile	S-0.A.0
ID1 code	7; Factory setting, changeable
Operating voltage acc. to AS Interface specification	18 ... 31.6 V
Product function suitable for AS-i Power24V	Yes
Protocol is supported AS-Interface protocol	Yes
Consumed current from profile conductors of the AS-Interface	
<ul style="list-style-type: none"> • at 30 V maximum • at 24 V with AS-i Power24V maximum 	<p>270 mA</p> <p>270 mA</p>
Type of address setting of AS-i slaves	via front addressing socket
Display version	
<ul style="list-style-type: none"> • as status display of the inputs/outputs • for AS Interface 	<p>Yellow LED</p> <p>LED green/red</p>
Reference code	

<ul style="list-style-type: none"> • acc. to DIN EN 61346-2 • acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750 	K A
Shock resistance	15g / 11 ms (modules) or 10g / 11 ms (modules with device connector)
Other information	An auxiliary external feed (AUX POWER) of between 20 and 30 V DC is necessary for supplying the output circuits. The auxiliary feed must comply with IEC 60990 (PELV), protection class III.

Digital Inputs

Number of digital inputs	4
Number of digital inputs safety-related	0
Type of input characteristic	PNP Type 2
Type of connection	2- and 3-wire technology

Sensor supply

Type of voltage supply for power supply	AS-Interface / U_AUX switchable
Ampacity of the sensor supply for all inputs at ambient temperature 40 °C	500 mA
<ul style="list-style-type: none"> • Note 	200 mA with supply via AS interface / 500 mA with supply via Uaux
Property of the sensor supply Short-circuit and overload resistant	Yes
Voltage drop at the sensor supply	
<ul style="list-style-type: none"> • from AS interface • from external auxiliary voltage 	8.5 V 1 V

Digital Outputs

Number of digital outputs	0
----------------------------------	---

Analog inputs

Number of analog inputs	0
--------------------------------	---

Analog outputs

Number of analog outputs	0
---------------------------------	---

Device connector

Ampacity of the interface to the device connector	
<ul style="list-style-type: none"> • for AS Interface • for external auxiliary voltage 	2 A 4 A

Installation/ mounting/ dimensions

Mounting type	screw and snap-on mounting
Height	100 mm
Width	22.5 mm
Depth	120 mm

Connections/ Terminals

Type of electrical connection	
--------------------------------------	--

- of the inputs and outputs

Screw terminals

Type of connectable conductor cross-sections

- solid
- finely stranded with core end processing
- finely stranded without core end processing
- at AWG conductors solid
- at AWG conductors stranded

1x (0.5 ... 2.5 mm²), 2x (1.0 ... 1.5 mm²)

1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1 mm²)

Not permitted

1x (20 ... 14), 2x (18 ... 16)

Not permitted

Certificates/ approvals

General Product Approval



[Miscellaneous](#)

Test Certificates

Marine / Shipping

[Type Test Certificates/Test Report](#)



other

[Confirmation](#)

[Miscellaneous](#)



ASi

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/sirius/catalogs

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK2200-2CE00-2AA2>

Cax online generator





<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK2200-2CE00-2AA2>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK2200-2CE00-2AA2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK2200-2CE00-2AA2&lang=en

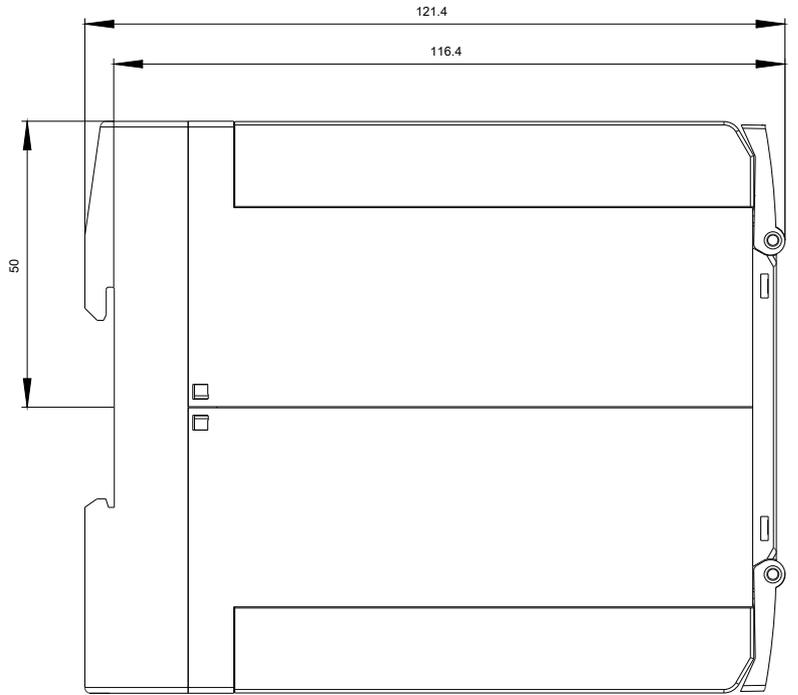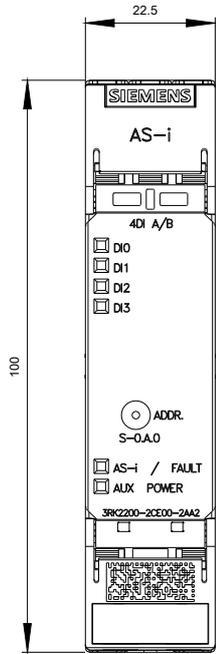

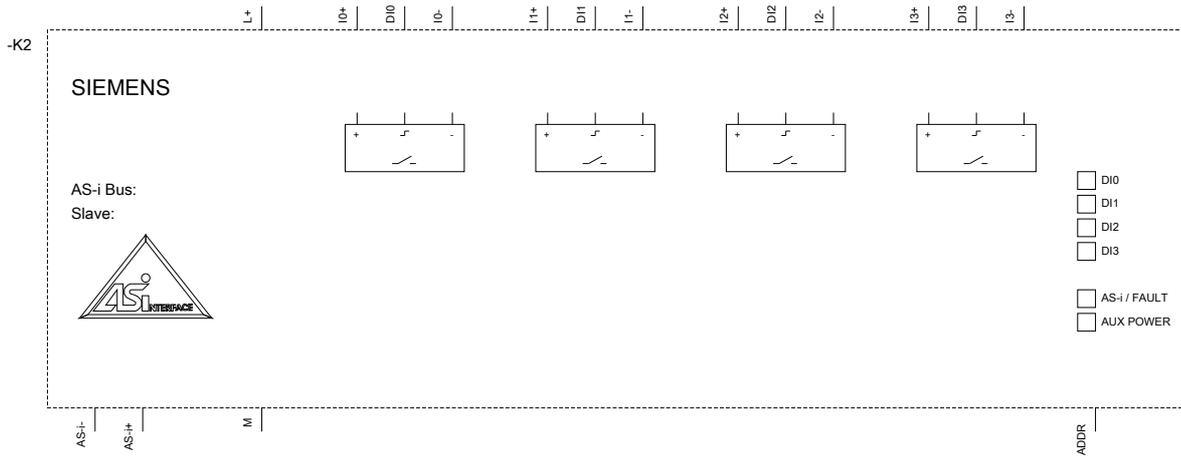

last modified:

09/13/2019