

AS-i SlimLine Compact module SC22.5 digital, A/B slave 4 DI/4 RQ, IP20 4 x inputs for 3-wire sensor Sensor supply can be switched over 4 x output relay 1 A 24 V DC Screw terminals Width 22.5 mm



Figure similar

Product designation	Slimline Compact I/O module for use in the control cabinet
Design of the product	AS-i SC22.5, 4DI/4RQ A/B
General technical data	
Protection class IP	IP20
Design of the slave type	A/B slave (Spec. 3.0)
AS interface slave profile	S-7.A.7
ID1 code	7; Setting cannot be changed
Operating voltage acc. to AS Interface specification	18 ... 31.6 V
Product function suitable for AS-i Power24V	Yes
Consumed current from profile conductors of the AS-interface	
• at 30 V maximum	300 mA
• at 24 V with AS-i Power24V maximum	300 mA
Type of address setting of AS-i slaves	via front addressing socket
Display version	
• as status display of the inputs/outputs	Yellow LED
• for AS Interface	LED green/red

Reference code	
• acc. to DIN EN 61346-2 • acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	K A
Shock resistance	15g / 11 ms (modules) or 10g / 11 ms (modules with device connector)
Other information	Sensor supply via Uaux: Auxiliary feed 20 to 30 V DC required to supply the sensor. Sensor supply via AS-i: No additional power required.

Digital Inputs

Number of digital inputs	4
Number of digital inputs safety-related	0
Type of input characteristic	PNP Type 2
Type of connection	2- and 3-wire technology

Sensor supply

Type of voltage supply for power supply	AS-Interface / U_AUX switchable
Ampacity of the sensor supply for all inputs at ambient temperature 40 °C	500 mA
• Note	200 mA with supply via AS interface / 500 mA with supply via Uaux
Property of the sensor supply Short-circuit and overload resistant	Yes
Voltage drop at the sensor supply	
• from AS interface • from external auxiliary voltage	8.5 V 1 V

Digital Outputs

Number of digital outputs	4
Type of switching output	Relays, NO contacts
Property of the output Short-circuit proof	No
Ampacity of the output relay at AC-15	
• at 230 V at 50/60 Hz	3 A
Ampacity of the output relay at DC-13	
• at 24 V • at 110 V • at 230 V	1 A 0.2 A 0.1 A
Thermal current	5 A

Analog inputs

Number of analog inputs	0
--------------------------------	---

Analog outputs

Number of analog outputs	0
---------------------------------	---

Device connector


Ampacity of the interface to the device connector	
• for AS Interface	2 A
• for external auxiliary voltage	4 A


Installation/ mounting/ dimensions	
Mounting type	screw and snap-on mounting
Height	100 mm
Width	22.5 mm
Depth	120 mm

Ambient conditions	
Ambient temperature	
• during operation	-25 ... +70 °C
• during storage	-40 ... +85 °C

Connections/Terminals	
Type of electrical connection	
• of the inputs and outputs	Screw terminals

Further information	
Information- and Downloadcenter (Catalogs, Brochures,...)	
http://www.siemens.com/industrial-controls/catalogs	
Industry Mall (Online ordering system)	
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK2402-2CE00-2AA2	
Cax online generator	
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK2402-2CE00-2AA2	
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)	
https://support.industry.siemens.com/cs/ww/en/ps/3RK2402-2CE00-2AA2	
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)	
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK2402-2CE00-2AA2&lang=en	

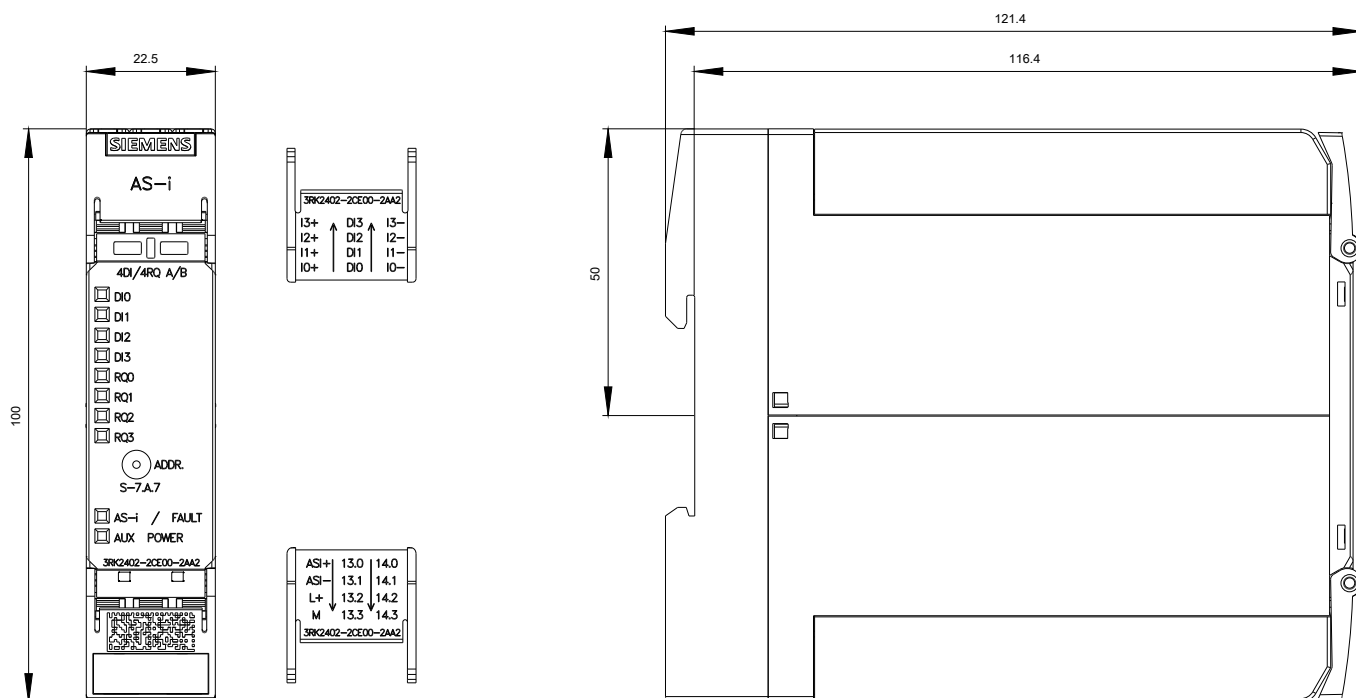

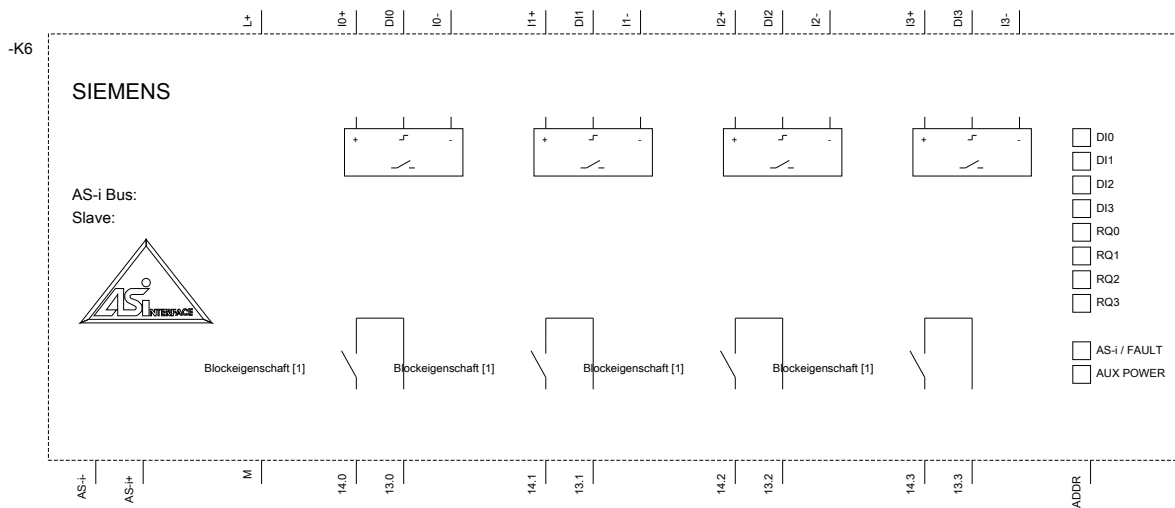

last modified:

10/23/2018