



MONITORING RELAY ATTACHABLE TO CONTACTOR 3RT2. SIZE S00 STANDARD,
DIGITAL ADJUSTABLE APPARENT/ACTIVE CURRENT
MONIT. 1.6 - 16A,
20-400 HZ,
3-PHASE SUPPLY 24-240 V AC/DC 1 CO CONTACT,
1 SEMICOND. FOR ALARM AND WARNING MONITORING
FOR CURRENT OVERSHOOT/UNDERSHOOT PHASE
FAILURE,
WIRE BREAK PHASE SEQUENCE FAULT CURRENT
BLOCKING CURRENT WARNING AND ALARM
THRESHOLDS WITH OR W/O ERROR LOG ON-DELAY 0-
99 S SPURIOUS PEAK SUPPR. 0-30 S BREAK AFTER
FAULT 0-300 MIN SCREW CONNECTION

General technical data:

product brand name		SIRIUS
Product designation		multi-phase current monitoring
Design of the product		multi-phase current monitoring
Size of the contactor / can be combined / company-specific		S00
Protection class IP		
• on the front		IP20
• of the terminal		IP20
Insulation voltage / for overvoltage category III according to IEC 60664 / with degree of pollution 3		
• rated value	V	690
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature		
• during storage	°C	-40 ... +80
• during operating	°C	-25 ... +60
Electromagnetic compatibility		IEC 60947-1 / IEC 61000-6-2 / IEC 61000-6-4
EMC immunity to interference		
• according to IEC 60947-1		ambience A (industrial sector)
EMC emitted interference		
• according to IEC 60947-1		ambience A (industrial sector)

Resistance against shock		15g / 11 ms
Resistance against vibration		10 ... 55 Hz / 0.35 mm
Impulse voltage resistance / rated value	kV	6
Operating apparent output / rated value	V·A	4
Rating / Rated value	W	2.5
Reference code • according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 • according to DIN EN 61346-2	K K	
Mechanical operating cycles as operating time • typical		10,000,000
Electrical operating cycles as operating time / at AC-15 / at 230 V • typical		100,000
Precision of digital display		+/-1 digit
Adjustable response delay time • when starting • with lower or upper limit violation	s s	0 ... 99 0 ... 30
Standby time / for restart after fault	s	0.2
Phase number		3
Number of monitored phases		3
Product function • overcurrent monitoring • undercurrent monitoring • overcurrent and undercurrent monitoring • apparent current monitoring • active current monitoring • undercurrent recognition DC • undercurrent recognition of 1 phase • overcurrent recognition DC • current window recognition DC • undercurrent recognition of 3 phases • overcurrent recognition of 1 phase • tension window recognition of 3 phases • tension window recognition of 1 phase • phase sequence recognition • can be activated or deactivated / phase sequence recognition • self-reset • reset external • manual RESET		Yes Yes Yes Yes Yes No No No No Yes No No No Yes Yes Yes No Yes

Adjustable response current		
• 1	A	1.6 ... 16
• 2	A	1.6 ... 16
Factor / as multiple of the current monitoring upper limit		
• for the adjustable value of a blocking current		2 ... 5
Response value residual current detection / at 50/60 Hz		
• typical	A	1.5
Relative metering precision		
• with regard to measured value	%	5
Type of current / for monitoring		AC
Measurable current / for AC	A	1.6 ... 16
Adjustable switching hysteresis for measured current value	A	0.1 ... 3
Response time / maximum	ms	200
Relative repeat accuracy	%	2
Temperature drift per °C	%/°C	0.1
Current-carrying capacity		
• for permanent overcurrent / maximum permissible	A	16
• for overcurrent duration < 1 s / maximum permissible	A	320

Supply voltage:

Type of / supply voltage		AC/DC
Supply voltage frequency / 1	Hz	50 ... 60
Supply voltage / 1		
• for DC	V	24 ... 240
• at 50 Hz / for AC	V	24 ... 240
• at 60 Hz / for AC	V	24 ... 240
Stored energy time / supply voltage failure / minimum	ms	10

Auxiliary circuit:

Design of the contact element / of the output relay		closed-circuit current / open-circuit current
Operating current / at 17 V / minimum	mA	5
Number of outputs / as contact-less semiconductor switching element / for reporting function		
• non-delayed		1
Current-carrying capacity / of the semiconductor output		
• at DC-13 / at 240 V	mA	20
• at AC-14 / at 240 V / at 50/60 Hz	mA	20
Residual current / of the semiconductor output / maximum	mA	0.035
Number of change-over switches		
• for auxiliary contacts		1
Operating current / of the auxiliary contacts		

- at AC-15
 - at 24 V
 - at 230 V
 - at 400 V
- at DC-13
 - at 24 V
 - at 125 V
 - at 250 V

A	3
A	3
A	3
A	1
A	0.2
A	0.1

Inputs/ Outputs:

Short-circuit:

Installation/mounting/dimensions:

mounting position		any
Mounting type		direct mounting
Width	mm	45
Height	mm	79
Depth	mm	80
Distance, to be maintained, to the ranks assembly		
• forwards	mm	0
• backwards	mm	0
• upwards	mm	0
• downwards	mm	0
• sideways	mm	0
Distance, to be maintained, to earthed part		
• forwards	mm	0
• backwards	mm	0
• upwards	mm	0
• downwards	mm	0
• sideways	mm	6
Distance, to be maintained, conductive elements		
• forwards	mm	0
• backwards	mm	0
• upwards	mm	0
• downwards	mm	0
• sideways	mm	6

Connections:

Design of the electrical connection

- for main current circuit

screw-type terminals

• for auxiliary and control current circuit		screw-type terminals
Product function		
• removable terminal for main circuit		No
• removable terminal for auxiliary and control circuit		Yes
Type of the connectable conductor cross-section		
• for main contacts		
• solid		2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), 2x (1 ... 4 mm ²)
• finely stranded		
• with conductor end processing		2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²)
• for AWG conductors / for main contacts		1x 12, 2x (20 ... 14)
• for auxiliary contacts		
• solid		1x (0.5 ... 4 mm ²), 2x (0.5 ... 2.5 mm ²)
• finely stranded		
• with conductor end processing		1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)
• for AWG conductors / for auxiliary contacts		2x (20 ... 14)
Tightening torque		
• with screw-type terminals	N·m	0.8 ... 1.2

Certificates/approvals:

Verification of suitability

CE / UL / CSA

General Product Approval

EMC

Declaration of
Conformity



CCC



CSA



UL



C-TICK



EG-Konf.

Test Certificates

[Special Test
Certificate](#)

[Type Test
Certificates/Test
Report](#)

Shipping Approval



ABS



BUREAU
VERITAS



DNV



GL



LRS



RINA

Shipping Approval

other



RMRS

[Environmental
Confirmations](#)

UL/CSA ratings:

Contact rating designation / for auxiliary contacts / according to
UL

B300 / R300

Reliability figures:

Protection against electrical shock

finger-safe

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:


<http://www.siemens.com/cax>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RR2241-1FW30/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RR2241-1FW30

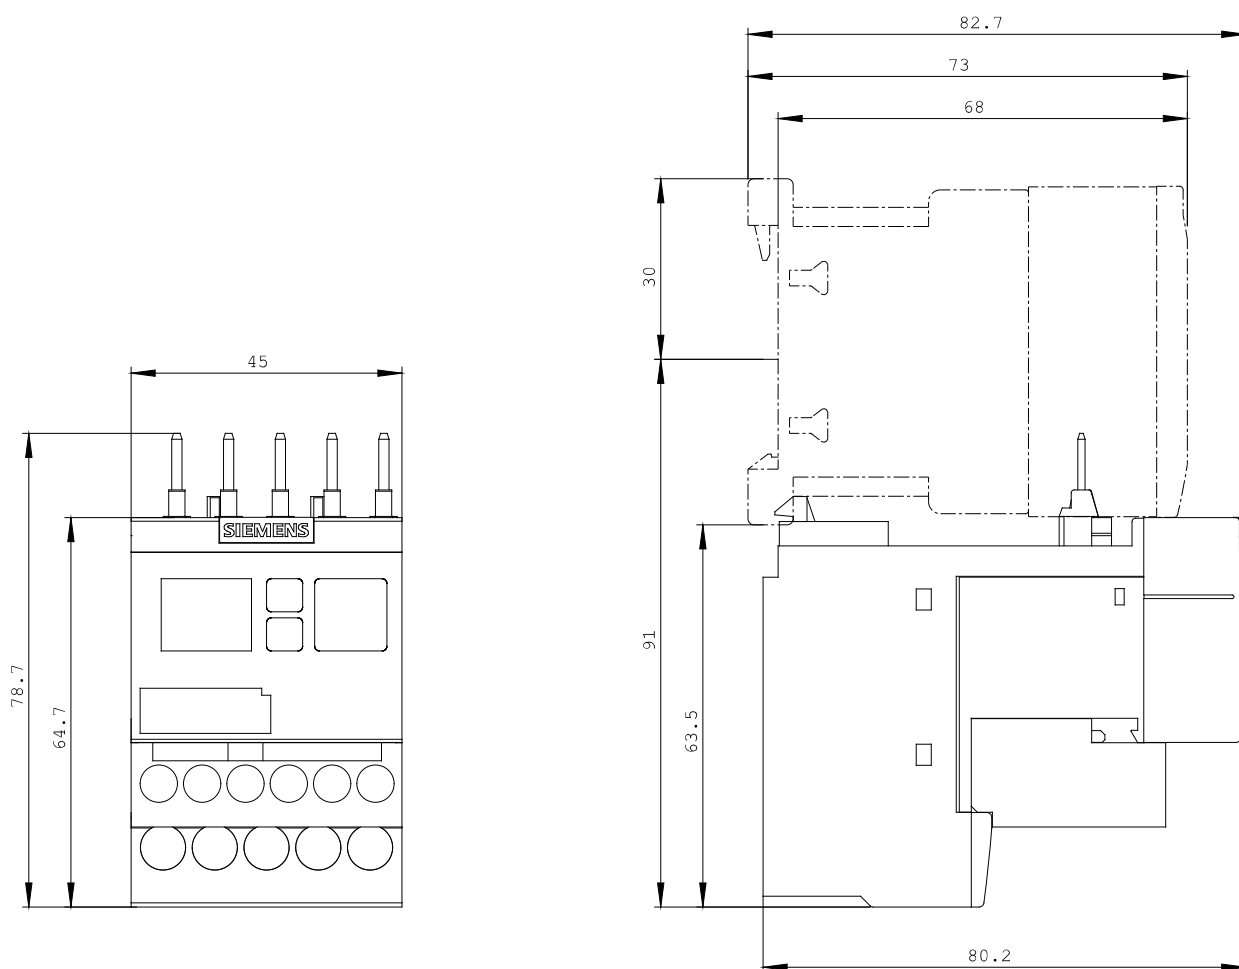

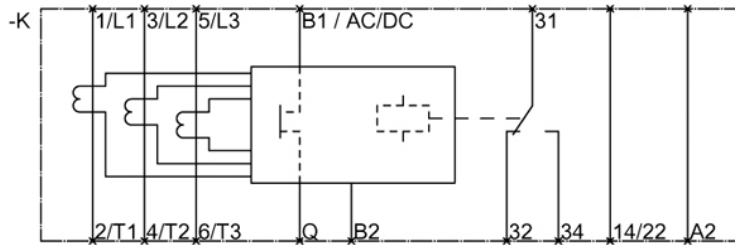

last change:

Aug 4, 2014