



Monitoring relay, can be mounted to Contactor 3RT2, Size S2 standard, digitally adjustable Apparant/active current monitoring 8...80 A, 20...400 Hz, 3-phase Supply 24 V AC/DC 1 change-over contact, 1 semiconductor output for alarm and warning Monitoring for Current overshoot and undershoot Phase failure, Cable break Phase sequence Residual current Blocking current Warning and alarm thresholds with or without fault buffer ON delay 0-99 s Noise pulse suppression 0-30 s Pause after fault 0-300 min Screw connection system

Product brand name	SIRIUS
Product designation	Monitoring relays
Design of the product	digitally adjustable, 3-phase current monitoring
Product type designation	3RR2
General technical data	
Size of contactor can be combined company-specific	S2
Operating apparent output rated value	4 V·A
Insulation voltage	690 V
• for overvoltage category III according to IEC 60664	
— with degree of pollution 3 rated value	
Surge voltage resistance rated value	6 kV
Protection class IP	IP20
• on the front	
• of the terminal	IP00
Shock resistance	10g / 11 ms
Vibration resistance	10 ... 55 Hz / 0.35 mm
Mechanical service life (switching cycles)	10 000 000
• typical	

Electrical endurance (switching cycles)	
• at AC-15 at 230 V typical	100 000
Reference code acc. to DIN EN 81346-2	K
Relative repeat accuracy	2 %

Supply voltage

Type of voltage of the supply voltage	AC/DC
Supply voltage 1 at AC	
• at 50 Hz rated value	24 V
• at 60 Hz rated value	24 V
Supply voltage 1 at DC rated value	24 V
Supply voltage frequency	
• 1	50 ... 60 Hz

Measuring circuit

Type of current for monitoring	AC
Adjustable pick-up value current	
• 1	8 ... 80 A
• 2	8 ... 80 A
Adjustable response delay time	
• when starting	0 ... 99 s
• with lower or upper limit violation	0 ... 30 s
Adjustable switching hysteresis for measured current value	0.2 ... 16 A
Accuracy of digital display	+/-1 digit

Precision

Temperature drift per °C	0.1 %/°C
---------------------------------	----------

Communication/ Protocol

Protocol is supported	
• IO-Link protocol	No
Type of voltage supply via input/output link master	No

Auxiliary circuit

Number of CO contacts	
• for auxiliary contacts	1
Operating current of auxiliary contacts at AC-15	
• at 24 V	3 A
• at 230 V	3 A
• at 400 V	3 A
Operating current of auxiliary contacts at DC-13	
• at 24 V	1 A
• at 125 V	0.2 A
• at 250 V	0.1 A

Contact rating of auxiliary contacts according to UL	B300 / R300
Main circuit	
Operating power	
• rated value	2.5 W
Outputs	
Ampacity of the semiconductor output in SIO mode	200 mA
Operating current at 17 V minimum	5 mA
Electromagnetic compatibility	
EMC emitted interference	
• acc. to IEC 60947-1	ambience A (industrial sector)
EMI immunity	
• acc. to IEC 60947-1	ambience A (industrial sector)
Safety related data	
Protection against electrical shock	finger-safe when touched vertically from front acc. to IEC 60529
Connections/ Terminals	
Product function	
• removable terminal for main circuit	No
• removable terminal for auxiliary and control circuit	Yes
Type of electrical connection	
• for main current circuit	screw-type terminals
• for auxiliary and control current circuit	screw-type terminals
Type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (1 ... 35 mm ²), 1x (1 ... 50 mm ²)
— stranded	2x (1 ... 35 mm ²), 1x (1 ... 50 mm ²)
— finely stranded with core end processing	2x (1 ... 25 mm ²), 1x (1 ... 35 mm ²)
• at AWG conductors for main contacts	2x (18 ... 2), 1x (18 ... 1)
Connectable conductor cross-section for main contacts	
• single or multi-stranded	1 ... 50 mm ²
• finely stranded with core end processing	1 ... 35 mm ²
Type of connectable conductor cross-sections	
• for auxiliary contacts	
— solid	1x (0.5 ... 4 mm ²), 2x (0.5 ... 2.5 mm ²)
— finely stranded with core end processing	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)
• at AWG conductors for auxiliary contacts	2x (20 ... 14)
AWG number as coded connectable conductor cross section	
• for main contacts	18 ... 1
Tightening torque	

- with screw-type terminals

0.8 ... 1.2 N·m

Installation/ mounting/ dimensions

Mounting position	any
Mounting type	direct mounting
Height	99 mm
Width	55 mm
Depth	112 mm
Required spacing	
• with side-by-side mounting — forwards — Backwards — upwards — downwards — at the side • for grounded parts — forwards — Backwards — upwards — at the side — downwards • for live parts — forwards — Backwards — upwards — downwards — at the side	0 mm 0 mm 0 mm 10 mm 0 mm 10 mm 0 mm 10 mm 10 mm 10 mm 10 mm 0 mm 10 mm 10 mm 10 mm

Ambient conditions

Installation altitude at height above sea level	
• maximum	2 000 m
Ambient temperature	
• during operation • during storage	-25 ... +60 °C -40 ... +80 °C

Certificates/ approvals

General Product Approval				EMC	Declaration of Conformity
 CCC	 CSA	 UL	 EAC	 RCM	 EG-Konf.

Declaration of Conformity	Test Certificates	Marine / Shipping			
Miscellaneous	Type Test Certificates/Test Report	Special Test Certificate	 ABS	 LRS	 PRS

Marine / Shipping	other				
 RINA	 RMRS	 DNV GL	Confirmation		

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RR2243-1FA30>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RR2243-1FA30>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RR2243-1FA30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RR2243-1FA30&lang=en

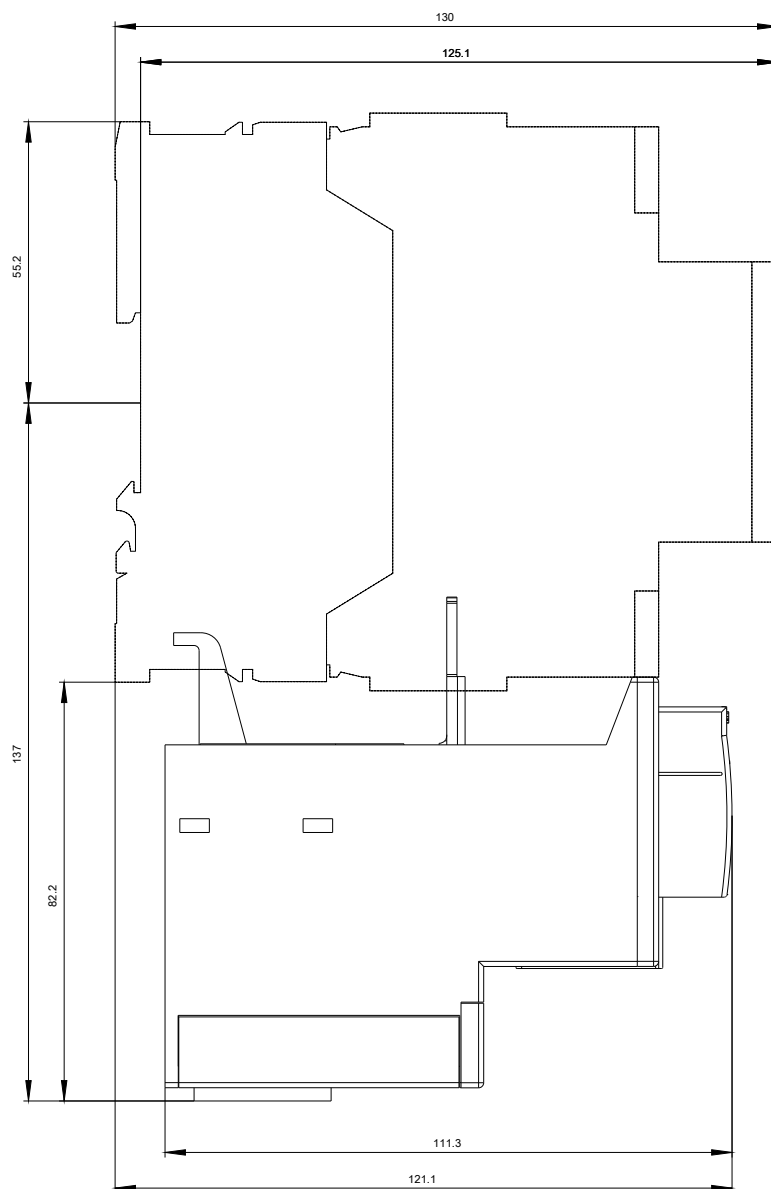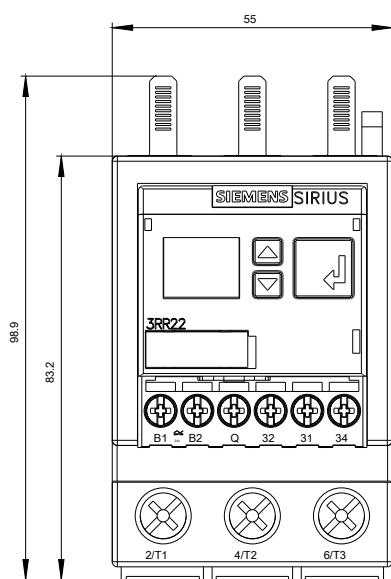

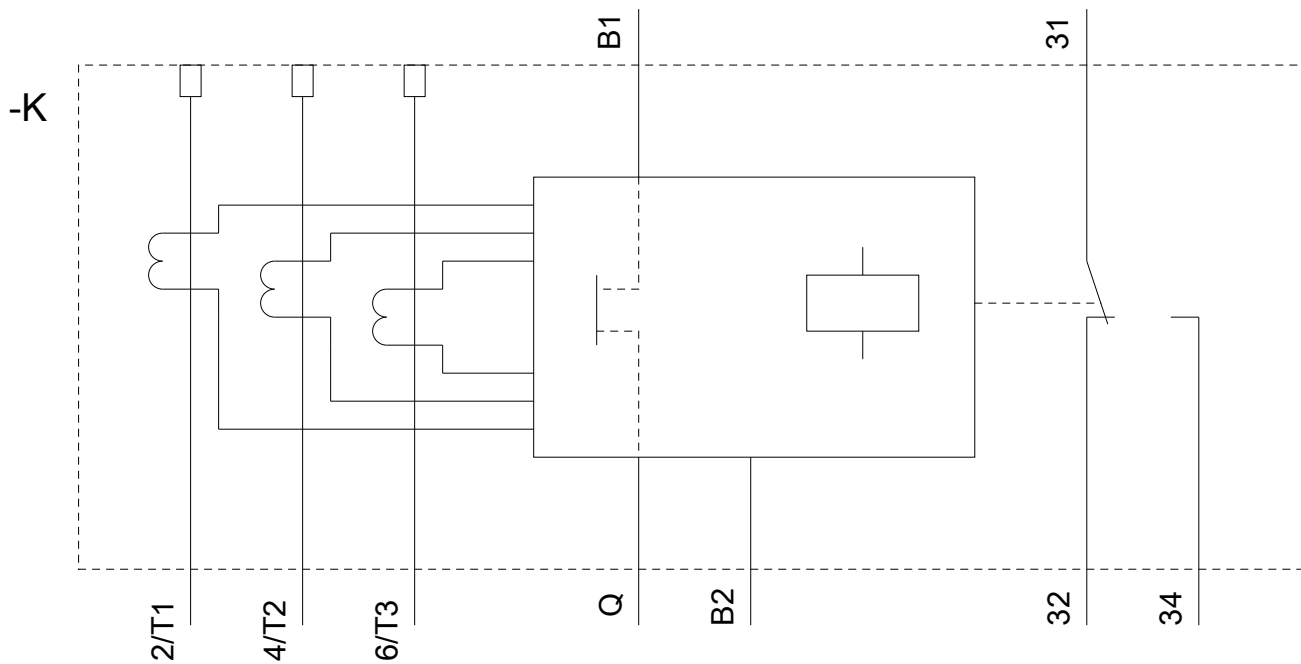

last modified:

05/26/2020