



INTERFACE CONVERTER AC/DC 24 V,
 2 WAY SEPARATION ON: 0-60MV, 0-100MV,
 0-300MV, 0-500MV, 0-1V, 0-2V, 0-5V,
 0-10 0-20V, 2-10V, 0-5MA, 0-10MA,
 0-20MA, 4-20MA, +-5MA,
 +-20MA OFF: 0 TO 10 V,
 0/4 TO 20 MA CAGE CLAMP

General technical details:		
product brand name		SIRIUS
Product designation		universal converter
Design of the base unit		switchable, active
Number of channels		1
Ambient temperature		
• during operating	°C	-25 ... +60
• during transport	°C	-40 ... +85
• during storage	°C	-40 ... +85
Insulation voltage / for overvoltage category III according to IEC 60664 / with degree of pollution 2 / rated value	V	50
Recorded real power	W	0.75
Protection class IP		IP20
Resistance against vibration / according to IEC 60068-2-6		10 ... 55 Hz: 0.35 mm
Shock resistance / according to IEC 60068-2-27		15g / 11 ms
Reference code / according to DIN EN 61346-2		K
Reference code / according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		K

Connections:		
Design of the electrical connection		spring-loaded terminals

Type of the connectable conductor cross-sections		
<ul style="list-style-type: none"> • solid • finely stranded / with wire end processing • for AWG conductors <ul style="list-style-type: none"> • stranded 		1x (0.5 ... 2.5 mm ²) 2x (0.5 ... 2.5 mm ²) 2x (20 ... 16)

Galvanic isolation:

Design of the electrical isolation		2 paths
Galvanic isolation		
<ul style="list-style-type: none"> • between entrance and outlet • between the voltage supply and other circuits 		Yes No

Supply voltage:

Type of voltage		AC/DC
Supply voltage frequency		
<ul style="list-style-type: none"> • rated value 	Hz	50 ... 60
Supply voltage		
<ul style="list-style-type: none"> • at 50 Hz / for AC <ul style="list-style-type: none"> • rated value • at 60 Hz / for AC <ul style="list-style-type: none"> • rated value • for DC <ul style="list-style-type: none"> • rated value 	V V V	24 ... 24 24 ... 24 24 ... 24
Working range factor supply voltage rated value		
<ul style="list-style-type: none"> • at 50 Hz / for AC • at 60 Hz / for AC • for DC 		0.8 ... 1.2 0.8 ... 1.2 0.7 ... 1.25

Inputs:

Limit frequency	Hz	30
Input voltage / maximum	V	30
Input voltage / typical	V	24

Outputs:

Burden / at the current output / maximum	Ω	400
Burden / at the voltage output / maximum	kΩ	1
Characteristic feature of the output / short-circuit protected		Yes
Overvoltage strength / at the current output / maximum	V	30
Type of signal		
<ul style="list-style-type: none"> • secondary side 		0 ... 10 V, 0 ... 20 mA, 4 ... 20 mA

• at the input

0 ... 60 mV, 0 ... 100 mV, 0 ... 300 mV, 0 ... 500 mV, 0 ... 1 V, 0 ... 2 V, 0 ... 5 V, 0 ... 10 V, 0 ... 20 V, 2 ... 10 V, 0 ... 5 mA, 0 ... 10 mA, 0 ... 20 mA, 4 ... 20 mA, +/-5 mA, +/-20 mA

Precision:

Relative metering precision	%	0.1
Relative linearity deviation	%	0.02
Temperature drift per °C	%/°C	0.015
Rise time	ms	10
Settling time / for 1 % conformity error	ms	30
Ripple of voltage / maximum	mV	5

Installation/mounting/dimensions:

Mounting type		snap-on mounting on 35 mm DIN rail according to DIN EN 50022
mounting position		any
Height	mm	80
Width	mm	17.5
Depth	mm	84

Certificates/approvals:

General Product Approval



Test Certificates

[Special Test Certificate](#)

other

[Declaration of Conformity](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WWW/view/en/3RS1706-2FD00/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RS1706-2FD00

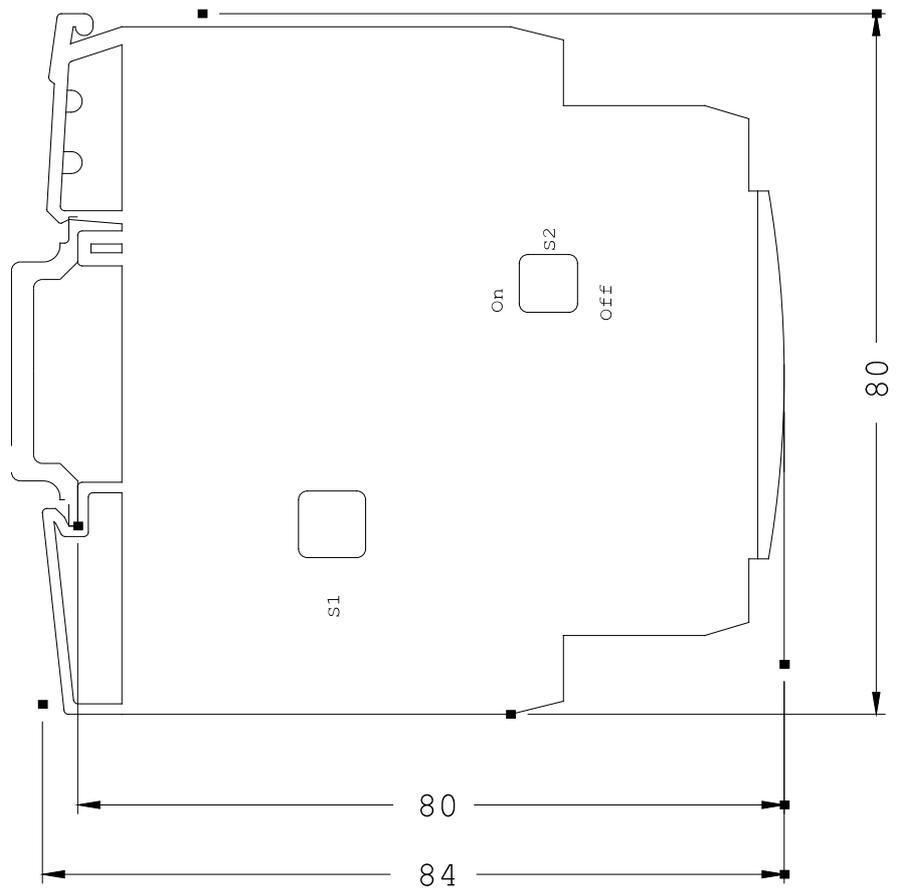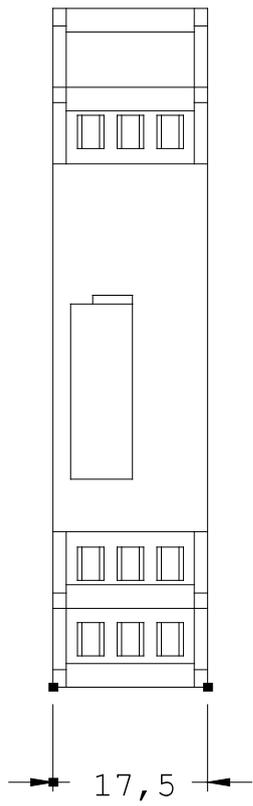

last change:

Jul 28, 2014