



CONTACTOR, AC-3 3 KW/400 V, 1 NC,  
DC 24 V, 0.7...1.25\*US, W. VARISTOR,  
3-POLE, SIZE S00, SCREW CONNECTION

| General technical data:                                      |    |             |
|--------------------------------------------------------------|----|-------------|
| product brand name                                           |    | SIRIUS      |
| Size of the contactor                                        |    | S00         |
| Protection class IP / on the front                           |    | IP20        |
| Degree of pollution                                          |    | 3           |
| Installation altitude / at a height over sea level / maximum | m  | 2,000       |
| Ambient temperature / during operating                       | °C | -25 ... +60 |
| Mechanical operating cycles as operating time                |    |             |
| • of the contactor / typical                                 |    | 30,000,000  |

| Main circuit:                                |   |     |
|----------------------------------------------|---|-----|
| Number of NC contacts / for main contacts    |   | 0   |
| Number of NO contacts / for main contacts    |   | 3   |
| Operating current                            |   |     |
| • at AC-1 / at 400 V                         |   |     |
| • at 40 °C ambient temperature / rated value | A | 18  |
| • at AC-3 / at 400 V / rated value           | A | 7   |
| • at AC-4 / at 400 V / rated value           | A | 6.5 |
| • with 1 current path / at DC-1              |   |     |
| • at 24 V / rated value                      | A | 15  |
| • at 110 V / rated value                     | A | 1.5 |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |    |       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|-------|
| <ul style="list-style-type: none"> <li>• with 2 current paths in series / at DC-1 <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul> </li> <li>• with 3 current paths in series / at DC-1 <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul> </li> <li>• with 1 current path / at DC-3 / at DC-5 <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul> </li> <li>• with 2 current paths in series / at DC-3 / at DC-5 <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul> </li> <li>• with 3 current paths in series / at DC-3 / at DC-5 <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul> </li> </ul> | A  | 15    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | A  | 8.4   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | A  | 15    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | A  | 15    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | A  | 15    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | A  | 0.1   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | A  | 15    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | A  | 0.25  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | A  | 15    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | A  | 15    |
| <b>Service power</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |    |       |
| • at AC-2 / at 400 V / rated value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | kW | 3     |
| • at AC-3 / at 400 V / rated value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | kW | 3     |
| • at AC-4 / at 400 V / rated value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | W  | 3,000 |

| Control circuit:                                                                      |   |               |
|---------------------------------------------------------------------------------------|---|---------------|
| <b>Design of the surge suppressor</b>                                                 |   | with varistor |
| <b>Voltage type / of control feed voltage</b>                                         |   | DC            |
| <b>Operating range factor control supply voltage rated value / of the magnet coil</b> |   |               |
| • for DC                                                                              |   | 0.7 ... 1.25  |
| <b>Pull-in power / of the solenoid / for DC</b>                                       | W | 2.3           |
| <b>Holding power / of the solenoid / for DC</b>                                       | W | 2.3           |

| Auxiliary circuit:                                                              |  |                                                 |
|---------------------------------------------------------------------------------|--|-------------------------------------------------|
| <b>Contact reliability / of the auxiliary contacts</b>                          |  | 1 faulty switching per 100 million (17 V, 1 mA) |
| <b>Number of NC contacts / for auxiliary contacts / instantaneous switching</b> |  | 1                                               |
| <b>Number of NO contacts / for auxiliary contacts / instantaneous switching</b> |  | 0                                               |

| Short-circuit:                                                    |  |                  |
|-------------------------------------------------------------------|--|------------------|
| <b>Design of the fuse link</b>                                    |  |                  |
| • for short-circuit protection of the auxiliary switch / required |  | fuse gL/gG: 10 A |
| • for short-circuit protection of the main circuit                |  |                  |
| • with type of assignment 1 / required                            |  | fuse gL/gG: 35 A |
| • at type of coordination 2 / required                            |  | fuse gL/gG: 20 A |

### Installation/mounting/dimensions:

|                                                               |    |                                                                                        |
|---------------------------------------------------------------|----|----------------------------------------------------------------------------------------|
| <b>Mounting type</b>                                          |    | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022 |
| <b>series installation</b>                                    |    | Yes                                                                                    |
| <b>Width</b>                                                  | mm | 45                                                                                     |
| <b>Height</b>                                                 | mm | 57.5                                                                                   |
| <b>Depth</b>                                                  | mm | 72                                                                                     |
| <b>Distance, to be maintained, to earthed part / sideways</b> | mm | 6                                                                                      |

### Connection type:

|                                                        |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Design of the electrical connection</b>             |  | <p>• for main current circuit</p> <p>• for auxiliary and control current circuit</p>                                                                                                                                                                                                                                                                                                                                                                                                                            | <p>screw-type terminals</p> <p>screw-type terminals</p>                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Type of the connectable conductor cross-section</b> |  | <p>• for main contacts</p> <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded <ul style="list-style-type: none"> <li>• with conductor end processing</li> </ul> </li> </ul> <p>• for AWG conductors / for main contacts</p> <p>• for auxiliary contacts</p> <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded <ul style="list-style-type: none"> <li>• with conductor end processing</li> </ul> </li> </ul> <p>• for AWG conductors / for auxiliary contacts</p> | <p>2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>), max. 2x (0.75 ... 4 mm<sup>2</sup>)</p> <p>2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)</p> <p>2x (20 ... 16), 2x (18 ... 14), 1x 12</p> <p>2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>), max. 2x (0.75 ... 4 mm<sup>2</sup>)</p> <p>2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)</p> <p>2x (20 ... 16), 2x (18 ... 14), 1x 12</p> |

### Certificates/approvals:

| General Product Approval                                                                    |                                                                                            |                                                                                            | Functional Safety / Safety of Machinery                                                    | Declaration of Conformity                                                                         | Test Certificates                                                                             |
|---------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| <br>CCC  | <br>CSA | <br>EAC | <a href="#">Type Examination</a>                                                           | <br>EG-Konf. | <a href="#">Special Test Certificate</a>                                                      |
| Shipping Approval                                                                           |                                                                                            |                                                                                            |                                                                                            |                                                                                                   |                                                                                               |
| <br>ABS  | <br>DNV | <br>GL  | <br>LRS | <br>PRS      | <br>RINA |
| Shipping Approval                                                                           | other                                                                                      |                                                                                            |                                                                                            |                                                                                                   |                                                                                               |
| <br>RMRS | <a href="#">Confirmation</a>                                                               | <a href="#">other</a>                                                                      | <a href="#">Environmental Confirmations</a>                                                |                                                                                                   |                                                                                               |

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

##### Cax online generator:



<http://www.siemens.com/cax>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RT1015-1KB42/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RT1015-1KB42](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT1015-1KB42)

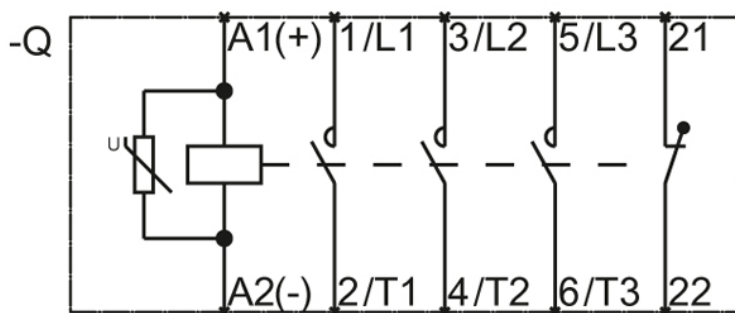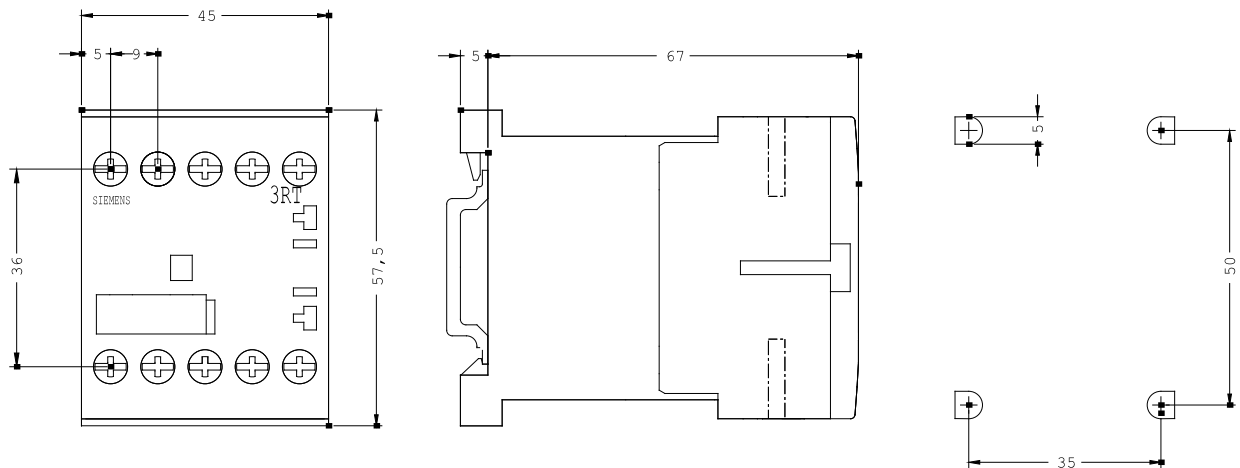

last change:

Jul 28, 2014