

CONTACTOR, AC-3 22 KW/400 V, AC 110 50/60 HZ, 3-POLE, SIZE S2, CAGE CLAMP REUSABLE PACKING PACKING = 30 ITEMS



Figure similar

product brand name	SIRIUS
Product designation	power contactor
General technical data	
Size of contactor	S2
Insulation voltage	
• rated value	690 V
Degree of pollution	3
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
• between coil and main contacts acc. to EN 60947-1	400 V
Protection class IP	
• on the front	IP00
• of the terminal	IP00
Shock resistance	
• at rectangular impulse	
— at AC	10g / 5 ms, 5g / 10 ms

<ul style="list-style-type: none"> • with sine pulse <ul style="list-style-type: none"> — at AC 	15g / 5 ms, 8g / 10 ms
Mechanical service life (switching cycles)	
<ul style="list-style-type: none"> • of contactor typical 	10 000 000
<ul style="list-style-type: none"> • of the contactor with added electronics-compatible auxiliary switch block typical 	5 000 000
<ul style="list-style-type: none"> • of the contactor with added auxiliary switch block typical 	10 000 000
Ambient conditions	
Installation altitude at height above sea level maximum	2 000 m
Ambient temperature	
<ul style="list-style-type: none"> • during operation 	-25 ... +60 °C
<ul style="list-style-type: none"> • during storage 	-55 ... +80 °C
Main circuit	
Number of poles for main current circuit	3
Number of NO contacts for main contacts	3
Number of NC contacts for main contacts	0
Operating current	
<ul style="list-style-type: none"> • at AC-1 at 400 V <ul style="list-style-type: none"> — at ambient temperature 40 °C rated value 	60 A
<ul style="list-style-type: none"> • at AC-1 <ul style="list-style-type: none"> — up to 690 V at ambient temperature 40 °C rated value — up to 690 V at ambient temperature 60 °C rated value 	60 A 55 A
<ul style="list-style-type: none"> • at AC-3 <ul style="list-style-type: none"> — at 400 V rated value — at 690 V rated value 	50 A 24 A
Connectable conductor cross-section in main circuit at AC-1	
<ul style="list-style-type: none"> • at 60 °C minimum permissible • at 40 °C minimum permissible 	16 mm ² 16 mm ²
Operating current for approx. 200000 operating cycles at AC-4	
<ul style="list-style-type: none"> • at 400 V rated value • at 690 V rated value 	24 A 12.6 A
Operating current	
<ul style="list-style-type: none"> • at 1 current path at DC-1 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value • with 2 current paths in series at DC-1 	55 A 4.5 A

— at 24 V rated value	55 A
— at 110 V rated value	25 A
• with 3 current paths in series at DC-1	
— at 24 V rated value	55 A
— at 110 V rated value	55 A
Operating current	
• at 1 current path at DC-3 at DC-5	
— at 24 V rated value	35 A
— at 110 V rated value	2.5 A
• with 2 current paths in series at DC-3 at DC-5	
— at 110 V rated value	25 A
— at 24 V rated value	55 A
• with 3 current paths in series at DC-3 at DC-5	
— at 110 V rated value	55 A
— at 24 V rated value	55 A
Operating power	
• at AC-1	
— at 230 V at 60 °C rated value	22 kW
— at 400 V rated value	38 kW
— at 690 V rated value	66 kW
— at 690 V at 60 °C rated value	66 kW
• at AC-2 at 400 V rated value	22 kW
• at AC-3	
— at 230 V rated value	15 kW
— at 400 V rated value	22 kW
— at 500 V rated value	30 kW
— at 690 V rated value	22 kW
Operating power for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	12.6 kW
• at 690 V rated value	11.4 kW
Thermal short-time current limited to 10 s	400 A
Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor	5 W
No-load switching frequency	
• at AC	5 000 1/h
Operating frequency	
• at AC-1 maximum	1 000 1/h
• at AC-2 maximum	400 1/h
• at AC-3 maximum	800 1/h
• at AC-4 maximum	300 1/h

Control circuit/ Control	
Type of voltage of the control supply voltage	AC
Control supply voltage at AC	
• at 50 Hz rated value	110 V
• at 60 Hz rated value	110 V
Control supply voltage frequency 1 rated value	50 Hz
Control supply voltage frequency 2 rated value	60 Hz
Operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 ... 1.1
• at 60 Hz	0.85 ... 1.1
Apparent pick-up power of magnet coil at AC	170 V·A
Inductive power factor with closing power of the coil	0.76
Apparent holding power of magnet coil at AC	15 V·A
Inductive power factor with the holding power of the coil	0.35
Closing delay	
• at AC	10 ... 24 ms
Opening delay	
• at AC	7 ... 20 ms
Arcing time	10 ... 15 ms

Auxiliary circuit	
Number of NC contacts	
• for auxiliary contacts	
— instantaneous contact	0
Number of NO contacts	
• for auxiliary contacts	
— instantaneous contact	0
Operating current at AC-12 maximum	10 A
Operating current at AC-15	
• at 230 V rated value	6 A
• at 400 V rated value	3 A
Operating current at DC-12	
• at 60 V rated value	6 A
• at 110 V rated value	3 A
• at 220 V rated value	1 A
Operating current at DC-13	
• at 24 V rated value	10 A
• at 60 V rated value	2 A
• at 110 V rated value	1 A
• at 220 V rated value	0.3 A
Contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)

UL/CSA ratings

Contact rating of auxiliary contacts according to UL	A600 / Q600
--	-------------

Short-circuit protection

Design of the fuse link

<ul style="list-style-type: none">for short-circuit protection of the main circuit<ul style="list-style-type: none">with type of coordination 1 requiredwith type of assignment 2 requiredfor short-circuit protection of the auxiliary switch required	fuse gL/gG: 160 A fuse gL/gG: 80 A fuse gL/gG: 10 A
---	---

Installation/ mounting/ dimensions

Mounting type

<ul style="list-style-type: none">Side-by-side mounting	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022 Yes
---	---

Height

112 mm

Width

55 mm

Depth

115 mm

Required spacing

<ul style="list-style-type: none">for grounded parts<ul style="list-style-type: none">at the side	6 mm
---	------

Connections/Terminals

Type of electrical connection

<ul style="list-style-type: none">for main current circuitfor auxiliary and control current circuit	screw-type terminals spring-loaded terminals
--	---

Type of connectable conductor cross-sections

<ul style="list-style-type: none">for main contacts<ul style="list-style-type: none">solidstrandedsingle or multi-strandedfinely stranded with core end processingfinely stranded without core end processingat AWG conductors for main contacts	2x (0.75 ... 16 mm ²) 2x (0.75 ... 25 mm ²) 2x (0,75 ... 16 mm ²) 2x (0.75 ... 16 mm ²) 2x (0.75 ... 16 mm ²) 2x (18 ... 2)
---	--

Type of connectable conductor cross-sections

<ul style="list-style-type: none">for auxiliary contacts<ul style="list-style-type: none">solidfinely stranded with core end processingfinely stranded without core end processingat AWG conductors for auxiliary contacts	2x (0.25 ... 2.5 mm ²) 2x (0.25 ... 1.5 mm ²) 2x (0.25 ... 2.5 mm ²) 2x (24 ... 14)
---	--

Certificates/approvals

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
 CSA	 EAC	 EG-Konf.	spezielle Prüfbescheinigung n Typprüfbescheinigung/Werkszeugnis  ABS

Shipping Approval	other
 DNV	 GL
 LRS	 RINA
 RMRS	Umweltbestätigung

other
sonstig Bestätigungen

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1036-3AG20-Z X95>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1036-3AG20-Z X95>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1036-3AG20-Z X95>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1036-3AG20-Z X95&lang=en

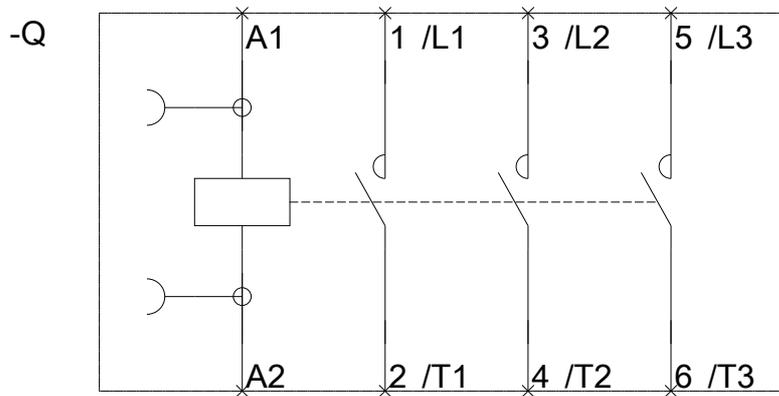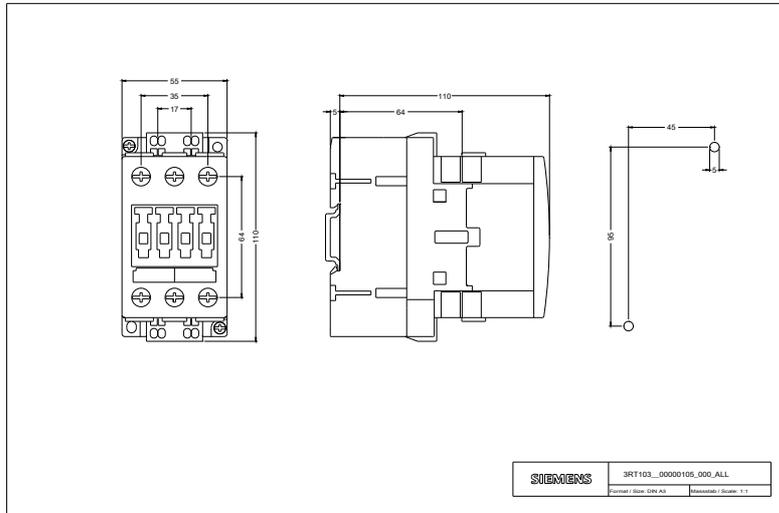

last modified:

10/17/2016