SIEMENS

Product data sheet

3RT1046-1XP00-0GA0



CONTACTOR, 3-POLE, LOW-NOISE, AC-3.45KW/400V, US=230V 50/60HZ SIZE S3, SCREW TERMINAL WITH ELECTRON. CONTROL MODULE ATTENUATED WITH VARISTOR

General technical data:		
product brand name		SIRIUS
Size of the contactor		S3
Protection class IP / on the front		IP20
Degree of pollution		3
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature / during operating	°C	-25 +60
Mechanical operating cycles as operating time		
of the contactor / typical		10,000,000
of the contactor with added auxiliary switch block / typical		10,000,000
 of the contactor with added electronics-compatible auxiliary switch block / typical 		5,000,000

Main circuit:		
Number of NC contacts / for main contacts		0
Number of NO contacts / for main contacts		3
Operating current		
• at AC-1 / at 400 V		
• at 40 °C ambient temperature / rated value	Α	120
• at AC-3 / at 400 V / rated value	Α	95
• at AC-4 / at 400 V / rated value	Α	80

• with 1 current path / at DC-1		
• at 24 V / rated value	Α	100
• at 110 V / rated value	Α	9
• with 2 current paths in series / at DC-1		
• at 24 V / rated value	Α	100
• at 110 V / rated value	Α	100
• with 3 current paths in series / at DC-1		
• at 24 V / rated value	Α	100
• at 110 V / rated value	Α	100
• with 1 current path / at DC-3 / at DC-5		
• at 24 V / rated value	Α	40
• at 110 V / rated value	Α	2.5
• with 2 current paths in series / at DC-3 / at DC-5		
• at 24 V / rated value	Α	100
• at 110 V / rated value	Α	100
 with 3 current paths in series / at DC-3 / at DC-5 		
• at 24 V / rated value	Α	100
• at 110 V / rated value	Α	100
Service power		
• at AC-2 / at 400 V / rated value	kW	45
• at AC-3 / at 400 V / rated value	kW	45
• at AC-4 / at 400 V / rated value	W	45,000

Control circuit:		
Design of the surge suppressor		with varistor
Voltage type / of control feed voltage		AC
Operating range factor control supply voltage rated value / of the magnet coil		
• at 50 Hz		
• for AC		0.8 1.1
Apparent pull-in power / of the solenoid / for AC	V-A	23.5
Apparent holding power / of the solenoid / for AC	V-A	23.5
Inductive power factor / with the pull-in power of the coil		0.68
Inductive power factor / with the pull-in power of the coil		0.27

Auxiliary circuit:	
Contact reliability / of the auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
Number of NC contacts / for auxiliary contacts / instantaneous switching	0
Number of NO contacts / for auxiliary contacts / instantaneous switching	0

Short-circuit:	
Design of the fuse link	
• for short-circuit protection of the auxiliary switch / required	fuse gL/gG: 10 A
• for short-circuit protection of the main circuit	
 with type of assignment 1 / required 	fuse gL/gG: 250 A
 at type of coordination 2 / required 	fuse gL/gG: 160 A

Installation/mounting/dimensions:		
Mounting type		screw and snap-on mounting onto 35 mm and 75 mm standard mounting rail
series installation		Yes
Width	mm	70
Height	mm	176
Depth	mm	152
Distance, to be maintained, to earthed part / sidewards	mm	6

Connection type:	
Design of the electrical connection	
for main current circuit	screw-type terminals
for auxiliary and control current circuit	screw-type terminals
Type of the connectable conductor cross-section	
for main contacts	
• solid	2x (2.5 16 mm²)
• stranded	2x (10 50 mm²)
• finely stranded	
 with conductor end processing 	2x (2.5 35 mm²)
 without conductor final cutting 	2x (10 35 mm²)
• for AWG conductors / for main contacts	2x (10 1/0)
for auxiliary contacts	
• solid	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), max. 2x (0.75 4 mm²)
• finely stranded	
 with conductor end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
• for AWG conductors / for auxiliary contacts	2x (20 16), 2x (18 14), 1x 12

Certificates/approvals:

General Product Approval

Functional Safety / Safety of Machinery Declaration of Conformity









Type Examination



Test Certificates

Shipping Approval

Special Test Certificate









other

Confirmation

other

Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

Cax online generator:


http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3RT1046-1XP00-0GA0/all

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ ...)$

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT1046-1XP00-0GA0

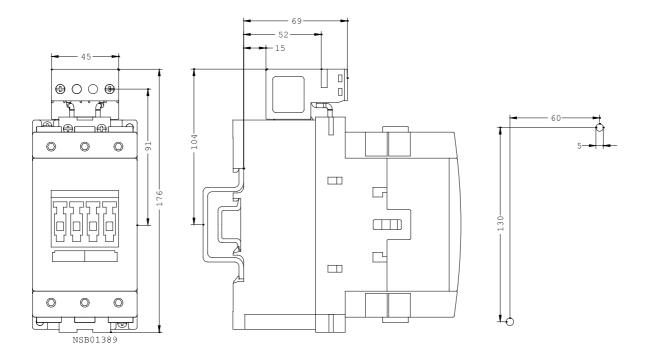

last change: Jul 28, 2014