



CONTACTOR,
110KW/400V/AC-3 AC(40...60HZ)/DC OPERATION UC 23-
26V AUXILIARY CONTACTS 2NO+2NC 3-POLE,
SIZE S10 BAR CONNECTIONS CONVENT. OPERATING
MECHANISM CAGE CLAMP TERMINAL

General technical data:		
product brand name		SIRIUS
Size of the contactor		S10
Protection class IP / on the front		IP00
Degree of pollution		3
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature / during operating	°C	-25 ... +60
Mechanical operating cycles as operating time		
• of the contactor / typical		10,000,000
• of the contactor with added auxiliary switch block / typical		10,000,000
• of the contactor with added electronics-compatible auxiliary switch block / typical		5,000,000

Main circuit:		
Number of NC contacts / for main contacts		0
Number of NO contacts / for main contacts		3
Operational current		
• at AC-1 / at 400 V		
• at 40 °C ambient temperature / rated value	A	275
• at 60 °C ambient temperature / rated value	A	250
• at AC-3 / at 400 V / rated value	A	225

• at AC-4 / at 400 V / rated value	A	195
• with 1 current path / at DC-1		
• at 24 V / rated value	A	200
• at 110 V / rated value	A	18
• with 2 current paths in series / at DC-1		
• at 24 V / rated value	A	200
• at 110 V / rated value	A	200
• with 3 current paths in series / at DC-1		
• at 24 V / rated value	A	200
• at 110 V / rated value	A	200
• with 1 current path / at DC-3 / at DC-5		
• at 24 V / rated value	A	200
• at 110 V / rated value	A	2.5
• with 2 current paths in series / at DC-3 / at DC-5		
• at 24 V / rated value	A	200
• at 110 V / rated value	A	200
• with 3 current paths in series / at DC-3 / at DC-5		
• at 24 V / rated value	A	200
• at 110 V / rated value	A	200
Service power		
• at AC-2 / at 400 V / rated value	kW	128
• at AC-3 / at 400 V / rated value	kW	128
• at AC-4 / at 400 V / rated value	W	110,000

Control circuit:		
Design of the surge suppressor		with varistor
Type of voltage / of the controlled supply voltage		AC/DC
Operating range factor control supply voltage rated value / of the magnet coil		
• at 50 Hz		
• for AC		0.8 ... 1.1
• at 60 Hz		
• for AC		0.8 ... 1.1
• for DC		0.8 ... 1.1
Apparent pull-in power / of the solenoid / for AC	V·A	590
Apparent holding power / of the solenoid / for AC	V·A	6.7
Inductive power factor / with the pull-in power of the coil		0.9
Inductive power factor / with the pull-in power of the coil		0.9
Pull-in power / of the solenoid / for DC	W	650
Holding power / of the solenoid / for DC	W	7.4

Auxiliary circuit:		
Contact reliability / of the auxiliary contacts		1 faulty switching per 100 million (17 V, 1 mA)
Number of NC contacts / for auxiliary contacts / instantaneous switching		2
Number of NO contacts / for auxiliary contacts / instantaneous switching		2



Short-circuit:		
Design of the fuse link		
for short-circuit protection of the auxiliary switch / required		fuse gL/gG: 10 A
for short-circuit protection of the main circuit		fuse gL/gG: 500 A
with type of assignment 1 / required		fuse gL/gG: 400 A
at type of coordination 2 / required		

Installation/mounting/dimensions:		
Type of mounting		screw fixing
series installation		Yes
Width	mm	145
Height	mm	210
Depth	mm	202
Distance, to be maintained, to earthed part / sideways	mm	10

Connection type:		
Design of the electrical connection		
for main current circuit		Cage Clamp terminals
for auxiliary and control current circuit		Cage Clamp terminals
Type of the connectable conductor cross-section		
for AWG conductors / for main contacts		2/0 ... 500 kcmil
for auxiliary contacts		2x (0.25 ... 2.5 mm ²)
solid		2x (0.25 ... 1.5 mm ²)
finely stranded		2x (0.25 ... 2.5 mm ²)
with conductor end processing		2x (24 ... 14)
without conductor final cutting		
for AWG conductors / for auxiliary contacts		

Certificates/approvals:		
-------------------------	--	--

General Product Approval				Functional Safety / Safety of Machinery	Declaration of Conformity
 CCC	 CSA	 GOST	 UL	Type Examination	 EG-Konf.
Test Certificates		Shipping Approval			
Special Test Certificate		 ABS	 DNV	 GL	 RMRS
other					
Confirmation		other		Environmental Confirmations	
Further information:					
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs					
Industry Mall (Online ordering system) http://www.siemens.com/industrial-controls/mall					
Cax online generator: http://www.siemens.com/cax					
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3RT1064-2AB36/all					
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT1064-2AB36					

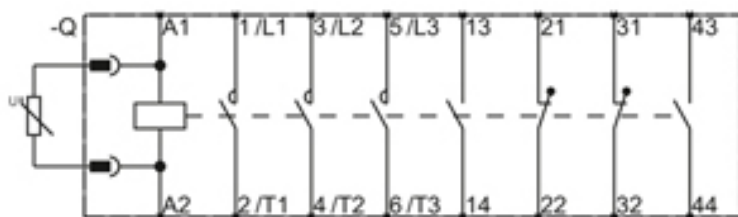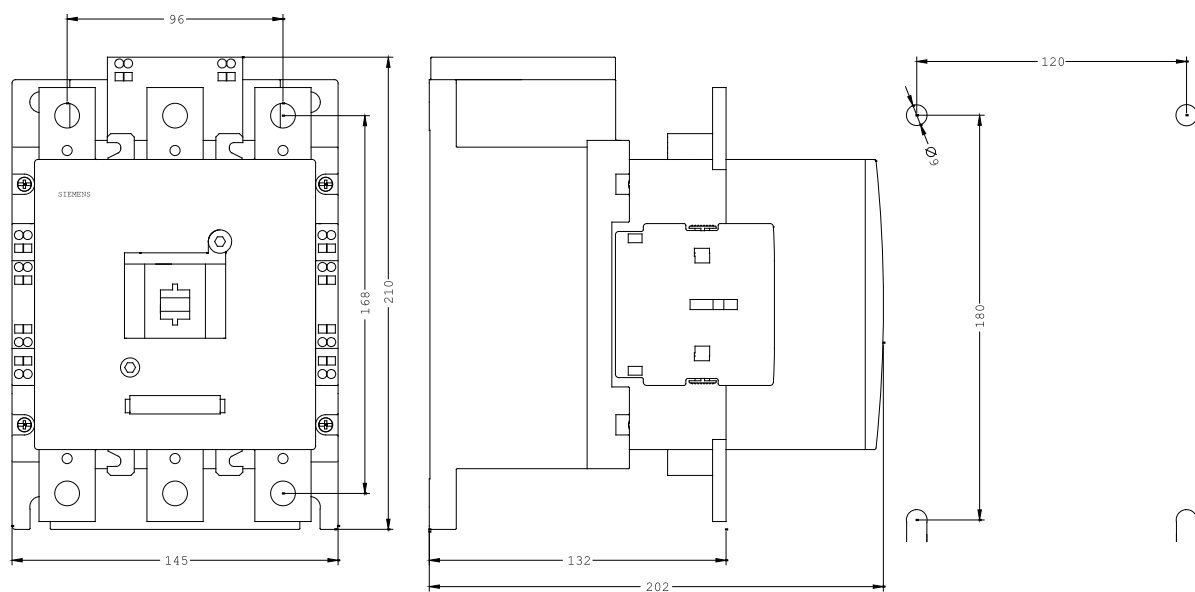

last change:

Feb 15, 2013