

CONTACTOR, 110KW/400V/AC-3 AC(40...60HZ)/DC OPERATION
UC 220-240V AUXILIARY CONTACTS 2NO+2NC 3-POLE, SIZE
S10 BAR CONNECTIONS CONVENT. OPERATING MECHANISM
MULTI-UNIT PACKAGING 1 PACK = 2 UNITS



Figure similar

product brandname	SIRIUS
Product designation	power contactor
General technical data	
Size of contactor	S10
Insulation voltage	
• rated value	1 000 V
Degree of pollution	3
Surge voltage resistance rated value	8 kV
maximum permissible voltage for safe isolation	
• between coil and main contacts acc. to EN 60947-1	690 V
Protection class IP	
• on the front	IP00
• of the terminal	IP00
Shock resistance	
• at rectangular impulse	
— at AC	8,5g / 5 ms, 4,2g / 10 ms

— at DC	8,5g / 5 ms, 4,2g / 10 ms
• with sine pulse	
— at AC	13,4g / 5 ms, 6,5g / 10 ms
— at DC	13,4g / 5 ms, 6,5g / 10 ms
Mechanical service life (switching cycles)	
• of contactor typical	10 000 000
• of the contactor with added electronics-compatible auxiliary switch block typical	5 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
Ambient conditions	
Installation altitude at height above sea level maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-55 ... +80 °C
Main circuit	
Number of poles for main current circuit	3
Number of NO contacts for main contacts	3
Number of NC contacts for main contacts	0
Operating current	
• at AC-1 at 400 V	
— at ambient temperature 40 °C rated value	275 A
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated value	275 A
— up to 690 V at ambient temperature 60 °C rated value	250 A
— up to 1000 V at ambient temperature 40 °C rated value	100 A
— up to 1000 V at ambient temperature 60 °C rated value	100 A
• at AC-3	
— at 400 V rated value	225 A
— at 690 V rated value	225 A
— at 1000 V rated value	68 A
Connectable conductor cross-section in main circuit at AC-1	
• at 60 °C minimum permissible	120 mm²
• at 40 °C minimum permissible	150 mm²
Operating current for approx. 200000 operating cycles at AC-4	

• at 400 V rated value • at 690 V rated value	96 A 85 A
Operating current	
• at 1 current path at DC-1 — at 24 V rated value — at 110 V rated value • with 2 current paths in series at DC-1 — at 24 V rated value — at 110 V rated value • with 3 current paths in series at DC-1 — at 24 V rated value — at 110 V rated value	200 A 18 A 200 A 200 A 200 A 200 A
Operating current	
• at 1 current path at DC-3 at DC-5 — at 24 V rated value — at 110 V rated value • with 2 current paths in series at DC-3 at DC-5 — at 110 V rated value — at 24 V rated value • with 3 current paths in series at DC-3 at DC-5 — at 110 V rated value — at 24 V rated value	200 A 2.5 A 200 A 200 A 200 A 200 A
Operating power	
• at AC-1 — at 230 V at 60 °C rated value — at 400 V rated value — at 690 V rated value — at 690 V at 60 °C rated value — at 1000 V at 60 °C rated value • at AC-2 at 400 V rated value • at AC-3 — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value — at 1000 V rated value	94 kW 164 kW 283 kW 283 kW 164 W 128 kW 73 kW 128 kW 160 kW 223 kW 90 W
Operating power for approx. 200000 operating cycles at AC-4	
• at 400 V rated value • at 690 V rated value	54 kW 82 kW
Thermal short-time current limited to 10 s	1 800 A

Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor	17 W
No-load switching frequency	
• at AC	2 000 1/h
• at DC	2 000 1/h
Operating frequency	
• at AC-1 maximum	750 1/h
• at AC-2 maximum	250 1/h
• at AC-3 maximum	500 1/h
• at AC-4 maximum	130 1/h

Control circuit/ Control

Type of voltage of the control supply voltage	AC/DC
Control supply voltage at AC	
• at 50 Hz rated value	220 ... 240 V
• at 60 Hz rated value	220 ... 240 V
Control supply voltage at DC	
• rated value	220 ... 240 V
Control supply voltage frequency 1 rated value	50 Hz
Control supply voltage frequency 2 rated value	60 Hz
Operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 ... 1.1
• at 60 Hz	0.8 ... 1.1
Operating range factor control supply voltage rated value of magnet coil at DC	0.8 ... 1.1
Design of the surge suppressor	with varistor
Apparent pick-up power of magnet coil at AC	590 V·A
Inductive power factor with closing power of the coil	0.9
Apparent holding power of magnet coil at AC	6.7 V·A
Inductive power factor with the holding power of the coil	0.9
Closing power of magnet coil at DC	650 W
Holding power of magnet coil at DC	7.4 W
Closing delay	
• at AC	30 ... 95 ms
• at DC	30 ... 95 ms
Opening delay	
• at AC	40 ... 80 ms
• at DC	40 ... 80 ms
Arcing time	10 ... 15 ms

Auxiliary circuit

Number of NC contacts	
-----------------------	--

• for auxiliary contacts — instantaneous contact	2
Number of NO contacts	
• for auxiliary contacts — instantaneous contact	2
Operating current at AC-12 maximum	10 A
Operating current at AC-15	
• at 230 V rated value	6 A
• at 400 V rated value	3 A
Operating current at DC-12	
• at 60 V rated value	6 A
• at 110 V rated value	3 A
• at 220 V rated value	1 A
Operating current at DC-13	
• at 24 V rated value	10 A
• at 60 V rated value	2 A
• at 110 V rated value	1 A
• at 220 V rated value	0.3 A

UL/CSA ratings

Contact rating of auxiliary contacts according to UL	A600 / Q600
---	-------------

Short-circuit protection

Design of the fuse link	
• for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required	fuse gL/gG: 500 A fuse gL/gG: 400 A
• for short-circuit protection of the auxiliary switch required	fuse gL/gG: 10 A

Installation/ mounting/ dimensions

Mounting type	screw fixing
• Side-by-side mounting	Yes
Height	210 mm
Width	145 mm
Depth	202 mm
Required spacing	
• for grounded parts — at the side	10 mm

Connections/Terminals

Type of electrical connection	
• for main current circuit	screw-type terminals
• for auxiliary and control current circuit	screw-type terminals
Type of connectable conductor cross-sections	

- at AWG conductors for main contacts

2/0 ... 500 kcmil

Type of connectable conductor cross-sections

- for auxiliary contacts
 - solid
 - finely stranded with core end processing
- at AWG conductors for auxiliary contacts

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (0.75 ... 4 mm²)
 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
 2x (20 ... 16), 2x (18 ... 14), 1x 12

Certificates/approvals

General Product Approval

Declaration of Conformity

Test Certificates



CCC



CSA



UL



EG-Konf.

[spezielle
Prüfbescheinigungen](#)
[n](#)

Test Certificates

Shipping Approval

other

[sonstig](#)



ABS



DNV



GL



RMRS

[Umweltbestätigung](#)

other

[sonstig](#)

[Bestätigungen](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1064-6AP36-Z X95>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1064-6AP36-Z X95>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1064-6AP36-Z X95>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1064-6AP36-Z X95&lang=en

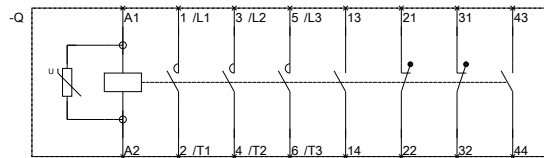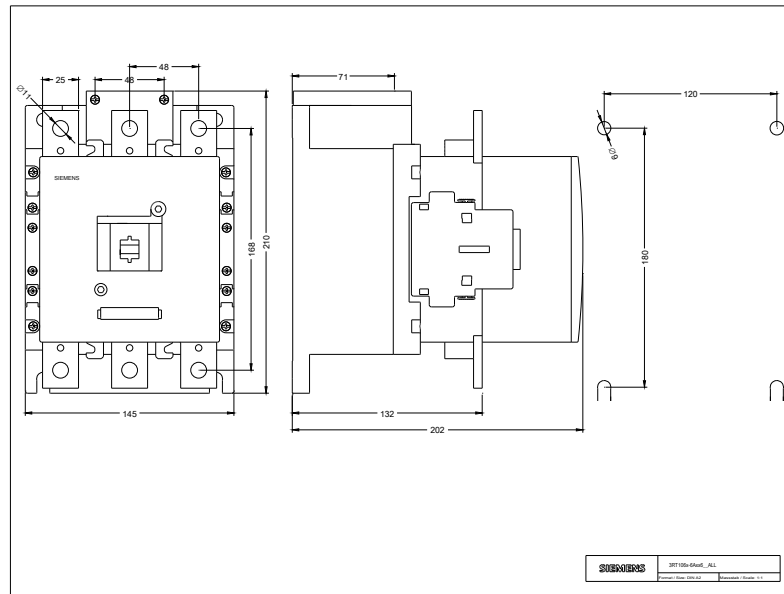

3RT106 - A. 6. 01. 4. IEC.DXF
3RT107 - A. 6. 01. 4. IEC.DXF

last modified:

10/19/2016