



CONTACTOR,  
275A/AC-1 W/O COIL AUXIL. CONTACTS 2NO+2NC 3-  
POLE,  
SIZE S6 MAIN COND.: BAR CONNECTIONS AUX. COND.:  
SCREW TERMINALS

### General technical data:

|                                                                                       |    |             |
|---------------------------------------------------------------------------------------|----|-------------|
| product brand name                                                                    |    | SIRIUS      |
| Size of the contactor                                                                 |    | S6          |
| Protection class IP / on the front                                                    |    | IP00        |
| Degree of pollution                                                                   |    | 3           |
| Installation altitude / at a height over sea level / maximum                          | m  | 2,000       |
| Ambient temperature / during operating                                                | °C | -25 ... +60 |
| Mechanical operating cycles as operating time                                         |    |             |
| • of the contactor / typical                                                          |    | 10,000,000  |
| • of the contactor with added auxiliary switch block / typical                        |    | 10,000,000  |
| • of the contactor with added electronics-compatible auxiliary switch block / typical |    | 5,000,000   |

### Main circuit:

|                                              |   |     |
|----------------------------------------------|---|-----|
| Number of NC contacts / for main contacts    |   | 0   |
| Number of NO contacts / for main contacts    |   | 3   |
| Operating current                            |   |     |
| • at AC-1 / at 400 V                         |   |     |
| • at 40 °C ambient temperature / rated value | A | 275 |
| • at AC-3 / at 400 V / rated value           | A | 97  |
| • with 1 current path / at DC-1              |   |     |

|                                                      |    |     |
|------------------------------------------------------|----|-----|
| • at 24 V / rated value                              | A  | 250 |
| • at 110 V / rated value                             | A  | 18  |
| • with 2 current paths in series / at DC-1           |    |     |
| • at 24 V / rated value                              | A  | 250 |
| • at 110 V / rated value                             | A  | 250 |
| • with 3 current paths in series / at DC-1           |    |     |
| • at 24 V / rated value                              | A  | 250 |
| • at 110 V / rated value                             | A  | 250 |
| • with 1 current path / at DC-3 / at DC-5            |    |     |
| • at 24 V / rated value                              | A  | 250 |
| • at 110 V / rated value                             | A  | 2.5 |
| • with 2 current paths in series / at DC-3 / at DC-5 |    |     |
| • at 24 V / rated value                              | A  | 250 |
| • at 110 V / rated value                             | A  | 250 |
| • with 3 current paths in series / at DC-3 / at DC-5 |    |     |
| • at 24 V / rated value                              | A  | 250 |
| • at 110 V / rated value                             | A  | 250 |
| <b>Service power</b>                                 |    |     |
| • at AC-2 / at 400 V / rated value                   | kW | 55  |
| • at AC-3 / at 400 V / rated value                   | kW | 55  |

| Control circuit:                                                                      |     |             |
|---------------------------------------------------------------------------------------|-----|-------------|
| <b>Voltage type / of control feed voltage</b>                                         |     | AC/DC       |
| <b>Operating range factor control supply voltage rated value / of the magnet coil</b> |     |             |
| • at 50 Hz                                                                            |     |             |
| • for AC                                                                              |     | 0.8 ... 1.1 |
| <b>Apparent pull-in power / of the solenoid / for AC</b>                              | V·A | 300         |
| <b>Apparent holding power / of the solenoid / for AC</b>                              | V·A | 5.8         |
| <b>Inductive power factor / with the pull-in power of the coil</b>                    |     | 0.9         |
| <b>Inductive power factor / with the pull-in power of the coil</b>                    |     | 0.8         |

| Auxiliary circuit:                                                              |  |   |
|---------------------------------------------------------------------------------|--|---|
| <b>Number of NC contacts / for auxiliary contacts / instantaneous switching</b> |  | 2 |
| <b>Number of NO contacts / for auxiliary contacts / instantaneous switching</b> |  | 2 |

| Short-circuit:                                                    |  |                  |
|-------------------------------------------------------------------|--|------------------|
| <b>Design of the fuse link</b>                                    |  |                  |
| • for short-circuit protection of the auxiliary switch / required |  | fuse gL/gG: 10 A |
| • for short-circuit protection of the main circuit                |  |                  |

- with type of assignment 1 / required
- at type of coordination 2 / required

fuse gL/gG: 355 A

fuse gL/gG: 350 A

#### Installation/mounting/dimensions:

|                                                        |    |              |
|--------------------------------------------------------|----|--------------|
| Mounting type                                          |    | screw fixing |
| series installation                                    |    | Yes          |
| Width                                                  | mm | 120          |
| Height                                                 | mm | 172          |
| Depth                                                  | mm | 170          |
| Distance, to be maintained, to earthed part / sideways | mm | 10           |

#### Connection type:

|                                                                                                                                                                                                                                                                                                                                                                                                                     |  |                                                                                                                                                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Design of the electrical connection</b> <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control current circuit</li> </ul>                                                                                                                                                                                                                                        |  | screw-type terminals<br>screw-type terminals                                                                                                                                                                                                      |
| <b>Type of the connectable conductor cross-section</b> <ul style="list-style-type: none"> <li>• for AWG conductors / for main contacts</li> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded <ul style="list-style-type: none"> <li>• with conductor end processing</li> </ul> </li> </ul> </li> <li>• for AWG conductors / for auxiliary contacts</li> </ul> |  | 4 ... 250 kcmil<br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), max. 2x (0.75 ... 4 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 16), 2x (18 ... 14), 1x 12 |

#### Certificates/approvals:

##### General Product Approval

##### Functional Safety / Safety of Machinery

##### Declaration of Conformity



CCC



CSA



UL

[Type Examination](#)



EG-Konf.

##### Test Certificates

##### Shipping Approval

[Special Test  
Certificate](#)



ABS



GL



RMRS

##### other

[Confirmation](#)

[other](#)

[Environmental  
Confirmations](#)

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:


<http://www.siemens.com/cax>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RT1456-6LA06/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RT1456-6LA06](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT1456-6LA06)

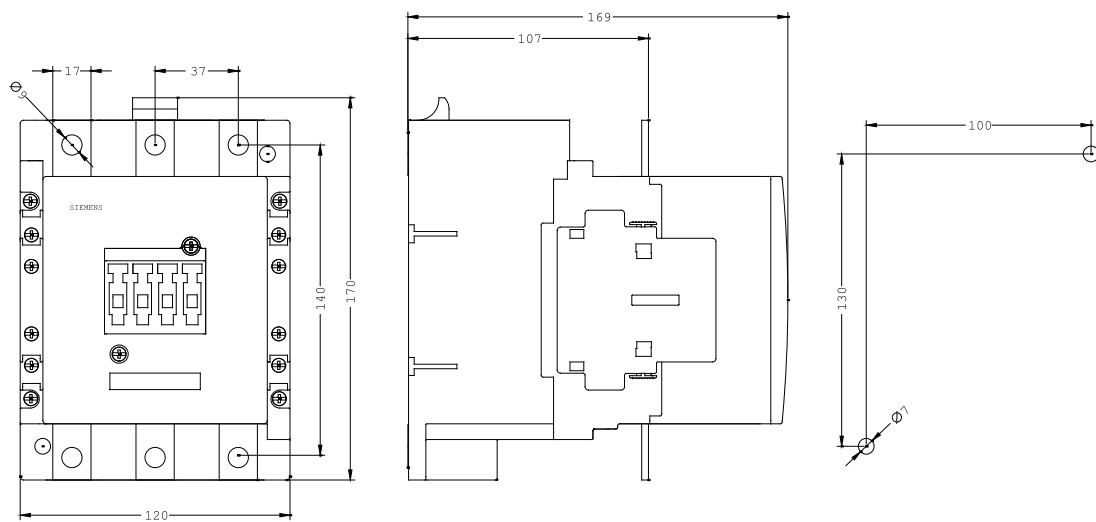

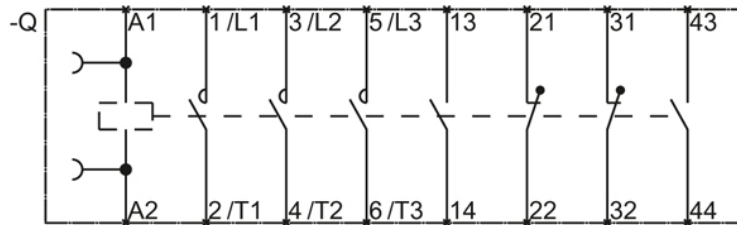

last change:

Aug 4, 2014