

CONTACTOR, AC-3, 411KW/400V, AC 220 V,
50/60 HZ 4-POLE, 2NO + 2NC, SIZE S0,
SCREW CONNECTION DATE OF SUPPLY MARCH '98

General technical data:

product brand name		SIRIUS
Size of the contactor		S0
Protection class IP / on the front		IP20
Protection against electrical shock		finger-safe
Degree of pollution		3
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature		
• during storage	°C	-55 ... +80
• during operating	°C	-25 ... +60
Insulation voltage / rated value	V	690
Mechanical operating cycles as operating time		
• of the contactor / typical		10,000,000
• of the contactor with added auxiliary switch block / typical		10,000,000
• of the contactor with added electronics-compatible auxiliary switch block / typical		5,000,000

Main circuit:

Number of NC contacts / for main contacts		2
Number of NO contacts / for main contacts		2
Operational current / at AC-1 / up to 690 V		
• at 40 °C ambient temperature / rated value	A	40
• at 60 °C ambient temperature / rated value	A	35
Operating current / at AC-2 / at AC-3		
• at 400 V		
• per NO contact / rated value	A	25
• per NC contact / rated value	A	25
Operating current		
• with 1 current path / at DC-1		
• at 24 V / rated value	A	35
• at 110 V / rated value	A	4.5
• at 220 V / rated value	A	1
• at 440 V / rated value	A	0.4

<ul style="list-style-type: none"> • with 2 current paths in series / at DC-1 <ul style="list-style-type: none"> • at 24 V / rated value • at 110 V / rated value • at 220 V / rated value • at 440 V / rated value 	A	35
	A	35
	A	5
	A	1
Operating current		
<ul style="list-style-type: none"> • with 1 current path / at DC-3 / at DC-5 <ul style="list-style-type: none"> • at 24 V <ul style="list-style-type: none"> • per NO contact / rated value • per NC contact / rated value • at 110 V <ul style="list-style-type: none"> • per NO contact / rated value • per NC contact / rated value • at 220 V <ul style="list-style-type: none"> • per NO contact / rated value • per NC contact / rated value • at 440 V <ul style="list-style-type: none"> • per NO contact / rated value • per NC contact / rated value • with 2 current paths in series / at DC-3 / at DC-5 <ul style="list-style-type: none"> • at 24 V <ul style="list-style-type: none"> • per NO contact / rated value • per NC contact / rated value • at 110 V <ul style="list-style-type: none"> • per NO contact / rated value • per NC contact / rated value • at 220 V <ul style="list-style-type: none"> • per NO contact / rated value • per NC contact / rated value • at 440 V <ul style="list-style-type: none"> • per NO contact / rated value • per NC contact / rated value 	A	20
	A	20
	A	2.5
	A	1.25
	A	1
	A	0.5
	A	0.09
	A	0.045
	A	35
	A	35
	A	15
	A	7.5
	A	3
	A	1.5
	A	0.27
	A	0.135
Operating performance		
<ul style="list-style-type: none"> • at AC-1 <ul style="list-style-type: none"> • at 230 V / rated value • at 400 V / rated value • at AC-2 / at AC-3 <ul style="list-style-type: none"> • at 230 V <ul style="list-style-type: none"> • per NO contact / rated value • per NC contact / rated value 	kW	15
	kW	26
	kW	5.5
	kW	5.5

<ul style="list-style-type: none"> • at 400 V • per NO contact / rated value • per NC contact / rated value 	kW	11
	kW	11
Active power loss / at AC-3 / at 400 V / with rated Operating current value / per conductor	W	1.6
Frequency of operation		
<ul style="list-style-type: none"> • with AC-1 / maximum • at AC-2 / at AC-3 / maximum 	1/h	1,000
	1/h	750

Control circuit/ Control:

Voltage type / of control feed voltage		AC
Control supply voltage		
<ul style="list-style-type: none"> • at 50 Hz / at AC / rated value • at 60 Hz / at AC / rated value 	V	220
	V	220
operating range factor control supply voltage rated value / of the magnet coil		
<ul style="list-style-type: none"> • at 50 Hz / for AC • at 60 Hz / for AC 		0.8 ... 1.1
		0.8 ... 1.1
Apparent pull-in power / of the solenoid / for AC	V·A	64
Apparent holding power / of the solenoid / for AC	V·A	8.4
Inductive power factor		
<ul style="list-style-type: none"> • with the pull-in power of the coil • with the pull-in power of the coil 		0.72
		0.24
Closing delay		
<ul style="list-style-type: none"> • at AC • at DC 	ms	6 ... 30
	ms	30 ... 90
Opening delay		
<ul style="list-style-type: none"> • at AC • at DC 	ms	13 ... 25
	ms	13 ... 40
Arcing time	ms	10 ... 15
Residual current / of electronics / for control with signal <0>		
<ul style="list-style-type: none"> • at 230 V / with AC / maximum permissible 	A	0.0060

Auxiliary circuit:

Contact reliability / of the auxiliary contacts		1 faulty switching per 100 million (17 V, 1 mA)
Number of NC contacts / for auxiliary contacts / instantaneous switching		0
Number of NO contacts / for auxiliary contacts / instantaneous switching		0
Operating current		
<ul style="list-style-type: none"> • at AC-12 / maximum • at AC-15 / at 230 V / rated value 	A	10
	A	6

<ul style="list-style-type: none"> • at AC-15 / at 400 V / rated value 	A	3
Operating current / at DC-12		
<ul style="list-style-type: none"> • at 60 V / rated value 	A	6
<ul style="list-style-type: none"> • at 110 V / rated value 	A	3
<ul style="list-style-type: none"> • at 220 V / rated value 	A	1
Operating current / at DC-13		
<ul style="list-style-type: none"> • at 24 V / rated value 	A	10
<ul style="list-style-type: none"> • at 60 V / rated value 	A	2
<ul style="list-style-type: none"> • at 110 V / rated value 	A	1
<ul style="list-style-type: none"> • at 220 V / rated value 	A	0.3

Short-circuit:

Design of the fuse link

- for short-circuit protection of the auxiliary switch / required
- for short-circuit protection of the main circuit
 - with type of assignment 1 / required
 - at type of coordination 2 / required

fuse gL/gG: 10 A

fuse gL/gG: 63 A

fuse gL/gG: 35 A

Installation/ mounting/ dimensions:

mounting position		with vertical mounting surface +/-180° rotatable, with vertical mounting surface +/- 30° tiltable to the front and back
Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
Mounting type / series installation		Yes
Width	mm	61
Height	mm	85
Depth	mm	91

Connections/ terminals:

Design of the electrical connection

- for main current circuit
- for auxiliary and control current circuit

screw-type terminals

screw-type terminals

Type of the connectable conductor cross-section

- for main contacts
 - solid
 - finely stranded
 - with conductor end processing
- for AWG conductors / for main contacts
- for auxiliary contacts
 - solid

2x (1 ... 2.5 mm²), 2x (2.5 ... 6 mm²), max. 2x 10 mm²

2x (1 ... 2.5 mm²), 2x (2.5 ... 6 mm²)

2x (20 ... 16), 2x (18 ... 14), 1x 12

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (0.75 ... 4 mm²)

- finely stranded
- with conductor end processing
- for AWG conductors / for auxiliary contacts

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
 2x (20 ... 16), 2x (18 ... 14), 1x 12

Certificates/ approvals:

General Product Approval



Functional Safety / Safety of Machinery

[Type Examination](#)

Declaration of Conformity



Test Certificates

[Special Test Certificate](#)

Shipping Approval



other

[Confirmation](#)

[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator




<http://www.siemens.com/cax>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RT1526-1AN20/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT1526-1AN20

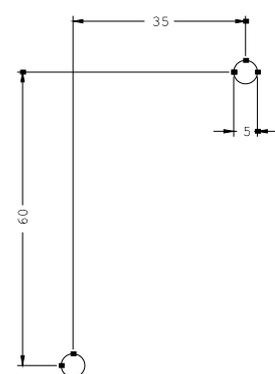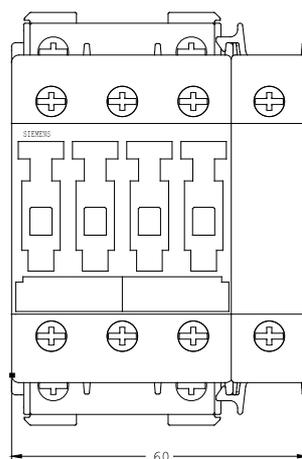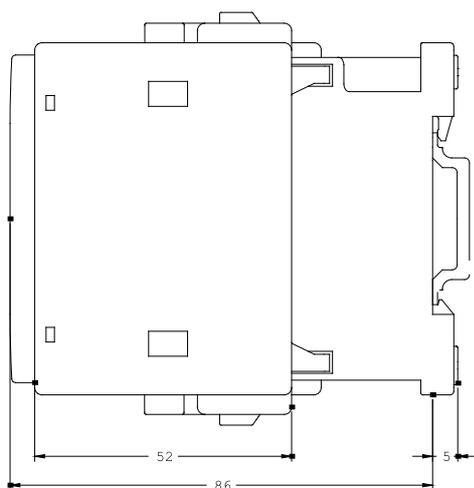

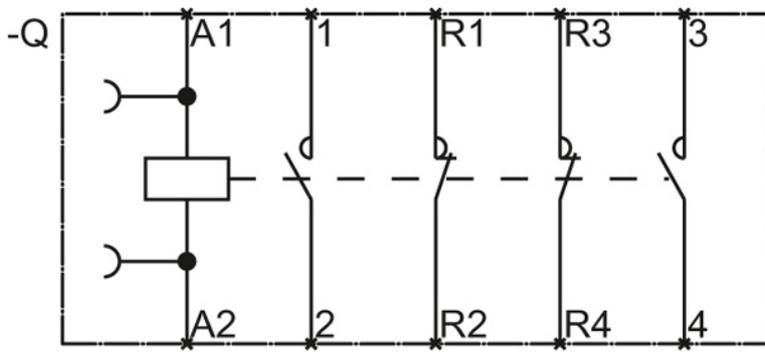

last change:

Jul 28, 2014