



OFF DELAY, DC 24V FOR 3RT10 CONTACTORS,
SIZE S00...S3 AND AUX. CONTACTORS 3RH W. DC-
OPERATION

General technical data:		
product brand name		SIRIUS
Product designation		opening delay device for contactor
Size of the contactor		S00, S0
Design of the product		OFF delay device
Ambient temperature		
• during storage	°C	-40 ... +80
• during operating	°C	-25 ... +50
Operating cycles / maximum	1/h	300
Protection against electrical shock		finger-safe
Product component / protective wiring		No

Control circuit:		
Voltage type / of control feed voltage		DC
Control supply voltage / 1		
• for DC		
• rated value	V	24
• initial rated value	V	24
• final rated value	V	24

Installation/mounting/dimensions:

mounting position		any
Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail

General Product Approval	EMC	Functional Safety / Safety of Machinery	Declaration of Conformity
--------------------------	-----	---	---------------------------



[Type Examination](#)



Test Certificates

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

Shipping Approval



Shipping Approval



other

[Confirmation](#)



[Declaration of Conformity](#)

[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator




<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RT1916-2BE01/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT1916-2BE01

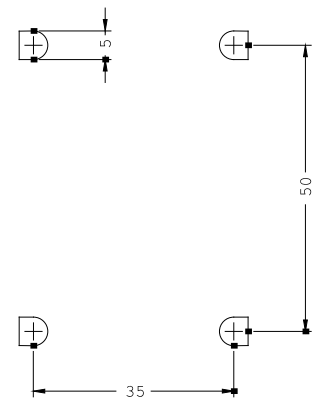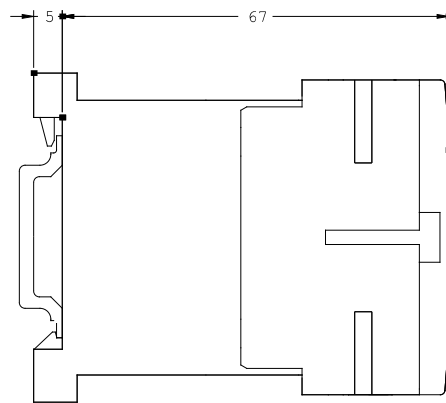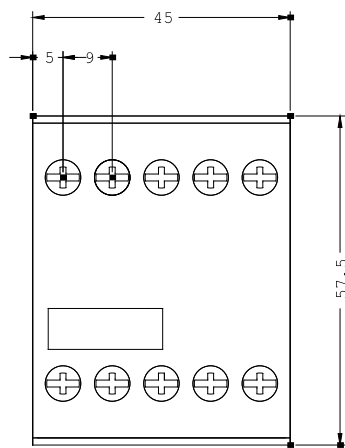

last change:

Jun 16, 2014