



SOLID-STATE,
TIME-DELAYED AUXILIARY SWITCH BLOCK SETTING
RANGE 0.05 S...1 NO,
AC/DC 200...240 V, 1NO + 1NC,
OFF-DELAY,
FOR MOUNTING ONTO CONTACTORS SIZES00

General technical data:		
product brand name		SIRIUS
Product designation		auxiliary switch
Design of the product		off-delayed without auxiliary voltage
Type of voltage		AC
Size of the contactor / can be combined / company-specific		S00
Product function		
• star-delta circuit		No
• at the relay outputs / changeover delayed/without delay		No
Product component / semi-conductor output		No
Product extension / optional / remote control		No
Product extension / strictly required / remote control		No
Adjustable time	s	0.05 ... 1
Ambient temperature		
• during operating	°C	-25 ... +60
Reference code		
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		K
• according to DIN EN 61346-2		K

Switching Function:

Switching function		
• slow-operating		No
• making pulse contact		No
• firmly clocked beginning with pulse		No
• firmly clocked beginning with pause		No
• relapse delayed		Yes
• variably clocked start with impulse		No
• impuls variably clocked start with pause		No
• with control signal		
• additive ON delay		No
• passing break contact		No
• OFF delay		No
• without control signal / OFF delay		Yes

Auxiliary circuit:		
Number of NC contacts		
• delayed switching		1
Number of NO contacts		
• delayed switching		1
Supply voltage frequency / for auxiliary and control current circuit		
• rated value	Hz	50 ... 60
Supply voltage / strictly required / auxiliary voltage		No
Control supply voltage		
• at 50 Hz / at AC		
• rated value	V	200 ... 240
• at 60 Hz / at AC		
• rated value	V	200 ... 240

Installation/mounting/dimensions:		
Width	mm	45
Height	mm	38
Depth	mm	75

Connections:		
Design of the electrical connection		
• jumper socket		No
• for auxiliary and control current circuit		screw-type terminals

Certificates/approvals:		
--------------------------------	--	--

General Product Approval			Functional Safety / Safety of Machinery	Declaration of Conformity
--------------------------	--	--	---	------------------------------



CCC



CSA



UL

[Type Examination](#)



EG-Konf.

Test Certificates

[Special Test
Certificate](#)

Shipping Approval



ABS



BUREAU
VERITAS



DNV



GL



LRS



PRS

Shipping Approval

other



RINA



RMRS

[Confirmation](#)

[Declaration of
Conformity](#)

[other](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RT1916-2FL11/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT1916-2FL11

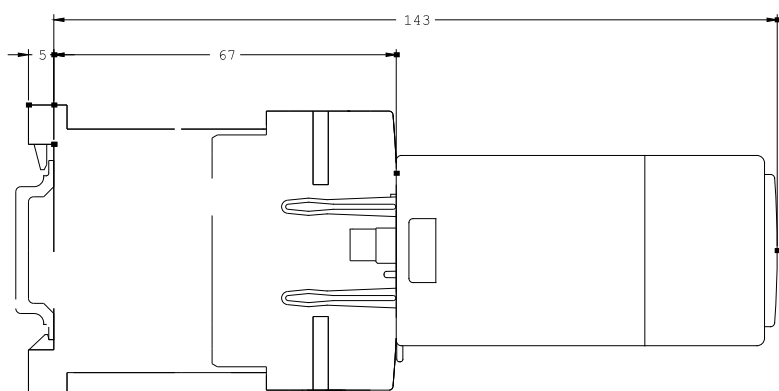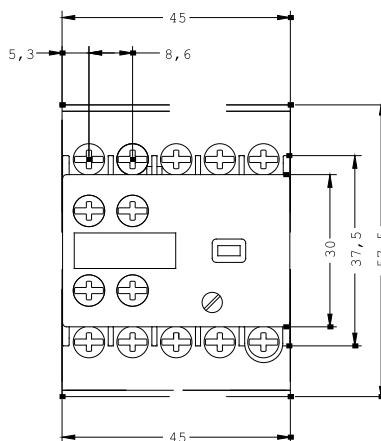

last change:

Jun 16, 2014