



COUPLING RELAY, AC-3, 3KW/400V, 1NO,  
DC 24V, 0,85...1,85\*US,  
W. INTEGR. SUPPRESSORDIODE,  
3-POLE SZ S00, SCREW TERMINAL

### General technical data:

|                                                              |    |                            |
|--------------------------------------------------------------|----|----------------------------|
| product brand name                                           |    | SIRIUS                     |
| Size of the contactor                                        |    | S00                        |
| Product extension / auxiliary switch                         |    | No                         |
| Product extension / function module for communication        |    | No                         |
| Protection class IP / on the front                           |    | IP20                       |
| Protection against electrical shock                          |    | finger-safe                |
| Degree of pollution                                          |    | 3                          |
| Installation altitude / at a height over sea level / maximum | m  | 2,000                      |
| Ambient temperature                                          |    |                            |
| • during storage                                             | °C | -55 ... +80                |
| • during operating                                           | °C | -25 ... +60                |
| Shock resistance                                             |    |                            |
| • at rectangular impulse                                     |    |                            |
| • at DC                                                      |    | 6,7g / 5 ms, 4,2g / 10 ms  |
| • at sine pulse                                              |    |                            |
| • at DC                                                      |    | 10,5g / 5 ms, 6,6g / 10 ms |
| Impulse voltage resistance / rated value                     | kV | 6                          |
| Insulation voltage / rated value                             | V  | 690                        |

|                                                                                                                               |   |            |
|-------------------------------------------------------------------------------------------------------------------------------|---|------------|
| <b>Maximum permissible voltage for protective separation / between coil and main contacts / in accordance with EN 60947-1</b> | V | 400        |
| <b>Mechanical operating cycles as operating time</b><br>• of the contactor / typical                                          |   | 30,000,000 |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                    |                                                                                                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| <b>Main circuit:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                    |                                                                                                             |
| <b>Number of NC contacts / for main contacts</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                    | 0                                                                                                           |
| <b>Number of NO contacts / for main contacts</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                    | 3                                                                                                           |
| <b>Operating current / at AC-1 / at 400 V</b><br>• at 40 °C ambient temperature / rated value<br>• at 60 °C ambient temperature / rated value                                                                                                                                                                                                                                                                                                                                                                                                                  | A<br>A                                                                             | 18<br>16                                                                                                    |
| <b>Connectable conductor cross-section / in main circuit</b><br>• at AC-1<br>• at 40 °C / minimum permissible<br>• at 60 °C / minimum permissible                                                                                                                                                                                                                                                                                                                                                                                                              | <br>m <sup>2</sup><br>m <sup>2</sup>                                               | <br>2.5<br>2.5                                                                                              |
| <b>Operational current</b><br>• at AC-2 / at 400 V / rated value<br>• at AC-3<br>• at 400 V / rated value<br>• at 500 V / rated value<br>• at 690 V / rated value<br>• at AC-4 / at 400 V / rated value                                                                                                                                                                                                                                                                                                                                                        | A<br><br>A<br>A<br>A<br>A                                                          | 7<br><br>7<br>6<br>4.9<br>6.5                                                                               |
| <b>Operational current</b><br>• with 1 current path / at DC-1<br>• at 24 V / rated value<br>• at 110 V / rated value<br>• at 220 V / rated value<br>• at 440 V / rated value<br>• at 600 V / rated value<br>• with 2 current paths in series / at DC-1<br>• at 24 V / rated value<br>• at 110 V / rated value<br>• at 220 V / rated value<br>• at 440 V / rated value<br>• at 600 V / rated value<br>• with 3 current paths in series / at DC-1<br>• at 24 V / rated value<br>• at 110 V / rated value<br>• at 220 V / rated value<br>• at 440 V / rated value | <br><br>A<br>A<br>A<br>A<br>A<br><br>A<br>A<br>A<br>A<br>A<br><br>A<br>A<br>A<br>A | <br><br>15<br>1.5<br>0.6<br>0.42<br>0.42<br><br>15<br>8.4<br>1.2<br>0.6<br>0.5<br><br>15<br>15<br>15<br>0.9 |

|                                                                                                      |     |                       |
|------------------------------------------------------------------------------------------------------|-----|-----------------------|
| • at 600 V / rated value                                                                             | A   | 0.7                   |
| <b>Operational current</b>                                                                           |     |                       |
| • with 1 current path / at DC-3 / at DC-5                                                            |     |                       |
| • at 24 V / rated value                                                                              | A   | 15                    |
| • at 110 V / rated value                                                                             | A   | 0.1                   |
| • with 2 current paths in series / at DC-3 / at DC-5                                                 |     |                       |
| • at 24 V / rated value                                                                              | A   | 15                    |
| • at 110 V / rated value                                                                             | A   | 0.25                  |
| • with 3 current paths in series / at DC-3 / at DC-5                                                 |     |                       |
| • at 24 V / rated value                                                                              | A   | 15                    |
| • at 110 V / rated value                                                                             | A   | 15                    |
| • at 220 V / rated value                                                                             | A   | 1.2                   |
| • at 440 V / rated value                                                                             | A   | 0.14                  |
| • at 600 V / rated value                                                                             | A   | 0.14                  |
| <b>Service power</b>                                                                                 |     |                       |
| • at AC-1                                                                                            |     |                       |
| • at 230 V / rated value                                                                             | kW  | 6.3                   |
| • at 400 V / rated value                                                                             | kW  | 11                    |
| • at 500 V / rated value                                                                             | kW  | 13.8                  |
| • at 690 V / rated value                                                                             | kW  | 19                    |
| • at AC-2 / at 400 V / rated value                                                                   | kW  | 3                     |
| • at AC-3                                                                                            |     |                       |
| • at 230 V / rated value                                                                             | kW  | 1.5                   |
| • at 400 V / rated value                                                                             | kW  | 3                     |
| • at 690 V / rated value                                                                             | kW  | 4                     |
| • at AC-4 / at 400 V / rated value                                                                   | kW  | 3                     |
| <b>Active power loss / at AC-3 / at 400 V / with rated operational current value / per conductor</b> | W   | 0.4                   |
| <b>Off-load operating frequency</b>                                                                  |     |                       |
| • at AC                                                                                              | 1/h | 10,000                |
| • at DC                                                                                              | 1/h | 10,000                |
| <b>Frequency of operation</b>                                                                        |     |                       |
| • at AC-1 / according to IEC 60947-6-2                                                               | 1/h | 1,000                 |
| • at AC-2 / according to IEC 60947-6-2                                                               | 1/h | 750                   |
| • at AC-3 / according to IEC 60947-6-2                                                               | 1/h | 750                   |
| • at AC-4 / according to IEC 60947-6-2                                                               | 1/h | 250                   |
| <b>Control circuit:</b>                                                                              |     |                       |
| <b>Design of the surge suppressor</b>                                                                |     | with suppressor diode |
| <b>Type of voltage / of the controlled supply voltage</b>                                            |     | DC                    |

|                                                                                                                                                                         |          |               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------------|
| <b>Control supply voltage</b><br>• for DC / rated value                                                                                                                 | V        | 24            |
| <b>operating range factor control supply voltage rated value / of the magnet coil</b><br>• for DC                                                                       |          | 0.85 ... 1.85 |
| <b>Pull-in power / of the solenoid / for DC</b>                                                                                                                         | W        | 1.6           |
| <b>Holding power / of the solenoid / for DC</b>                                                                                                                         | W        | 1.6           |
| <b>Closing delay</b><br>• at DC                                                                                                                                         | ms       | 30 ... 100    |
| <b>Opening delay</b><br>• at DC                                                                                                                                         | ms       | 7 ... 13      |
| <b>Arcing time</b>                                                                                                                                                      | ms       | 10 ... 15     |
| <b>Residual current / of electronics / for control with signal &lt;0&gt;</b><br>• at 230 V / with AC / maximum permissible<br>• at 24 V / with DC / maximum permissible | mA<br>mA | 3<br>10       |

#### Auxiliary circuit:

|                                                                                                                   |        |                                                 |
|-------------------------------------------------------------------------------------------------------------------|--------|-------------------------------------------------|
| <b>Contact reliability / of the auxiliary contacts</b>                                                            |        | 1 faulty switching per 100 million (17 V, 1 mA) |
| <b>Number of NC contacts / for auxiliary contacts / instantaneous switching</b>                                   |        | 0                                               |
| <b>Number of NO contacts / for auxiliary contacts / instantaneous switching</b>                                   |        | 1                                               |
| <b>Operating current / of the auxiliary contacts</b><br>• [nicht versorgt: PMD_ABP551_001_000]<br>•<br>• at 690 V | A<br>A | 2<br>1                                          |

#### UL/CSA ratings:

|                                                                                                                                                                                                                                                                                                                             |                                  |                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|------------------------------------|
| <b>yielded mechanical performance (hp)</b><br>• for single-phase squirrel cage motors<br>• at 110/120 V / rated value<br>• at 230 V / rated value<br>• for three-phase squirrel cage motors<br>• at 200/208 V / rated value<br>• at 220/230 V / rated value<br>• at 460/480 V / rated value<br>• at 575/600 V / rated value | hp<br>hp<br>hp<br>hp<br>hp<br>hp | 0.25<br>0.75<br>1.5<br>2<br>3<br>5 |
| <b>Operating current (FLA) / for three-phase squirrel cage motors</b><br>• at 480 V / rated value<br>• at 600 V / rated value                                                                                                                                                                                               | A<br>A                           | 4.8<br>6.1                         |
| <b>Contact rating designation / for auxiliary contacts / according to UL</b>                                                                                                                                                                                                                                                |                                  | A600 / Q600                        |

**Short-circuit:****Design of the fuse link**

- for short-circuit protection of the auxiliary switch / required
- for short-circuit protection of the main circuit
  - with type of assignment 1 / required
  - at type of coordination 2 / required

fuse gL/gG: 10 A

gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 35 A

gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 20A

**Installation/mounting/dimensions:****mounting position**

+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface

**Type of mounting**

screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

**Type of fixing/fixation / series installation**

Yes

**Width**

mm

45

**Height**

mm

57.5

**Depth**

mm

73

**Distance, to be maintained, to the ranks assembly / sideways**

mm

0

**Connections:****Design of the electrical connection**

- for main current circuit
- for auxiliary and control current circuit

screw-type terminals

screw-type terminals

**Type of the connectable conductor cross-section**

- for main contacts
  - solid
  - finely stranded
    - with conductor end processing
- for AWG conductors / for main contacts
- for auxiliary contacts
  - solid
  - finely stranded
    - with conductor end processing
- for AWG conductors / for auxiliary contacts

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), 2x 4 mm²

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)

2x (20 ... 16), 2x (18 ... 14), 2x 12

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), 2x 4 mm²

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)

2x (20 ... 16), 2x (18 ... 14), 2x 12

**Sicherheitsrelevante Kenngrößen:****B10 value / with high demand rate**

- according to SN 31920

1,000,000

**T1 value / for proof test interval or service life**

- according to IEC 61508

a

20

|                                                                                                                                                      |     |                                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------|-----|---------------------------------|
| <b>Proportion of dangerous failures</b><br><br>• with low demand rate / according to SN 31920<br><br>• with high demand rate / according to SN 31920 | %   | 40                              |
|                                                                                                                                                      | %   | 73                              |
| <b>Failure rate (FIT value) / with low demand rate</b><br><br>• according to SN 31920                                                                | FIT | 100                             |
| <b>Product function</b><br><br>• mirror contact to IEC 60947-4-1<br><br>• comment<br><br>• positively driven operation to IEC 60947-5-1              |     | Yes<br><br>with 3RH29<br><br>No |

#### Certificates/approvals:

##### General Product Approval

##### Functional Safety / Safety of Machinery

##### Declaration of Conformity



CCC



CSA



GOST



UL

[Type Examination](#)



EG-Konf.

##### Test Certificates

[Special Test  
Certificate](#)

[Type Test  
Certificates/Test  
Report](#)

##### Shipping Approval



ABS



BUREAU  
VERITAS



DNV



GL



LRS



PRS

##### Shipping Approval

##### other



RINA



RMRS

[Confirmation](#)



VDE

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

##### Cax online generator




<http://www.siemens.com/cax>


##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RT2015-1SB41/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RT2015-1SB41](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT2015-1SB41)

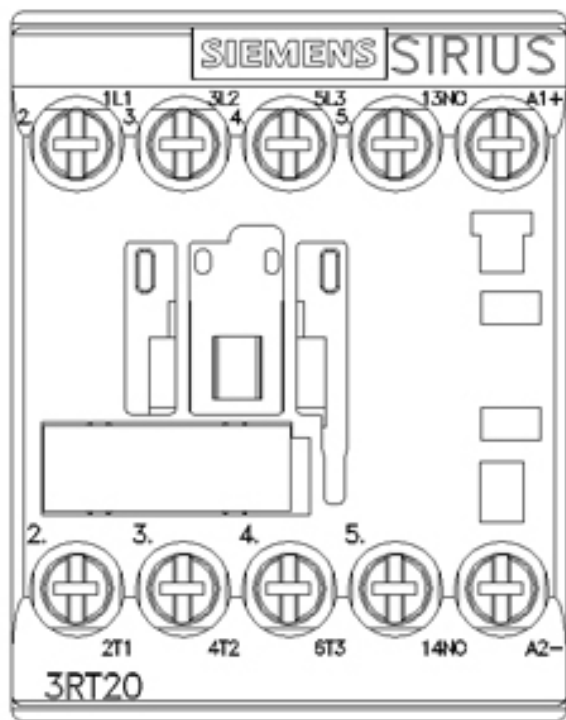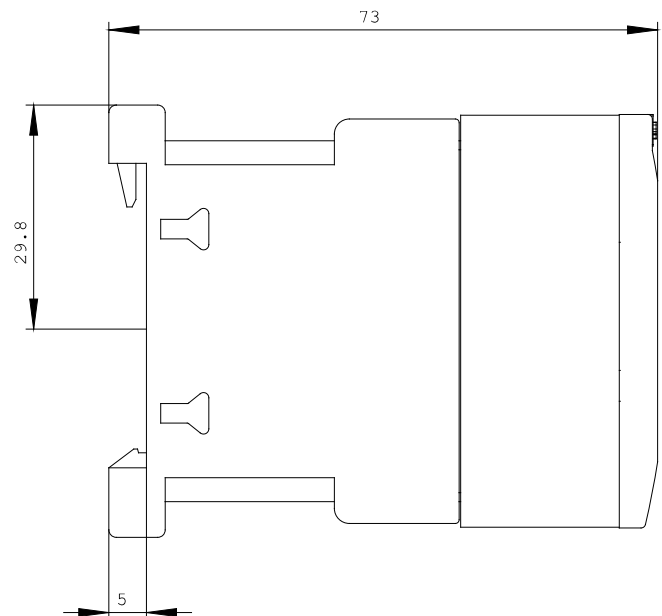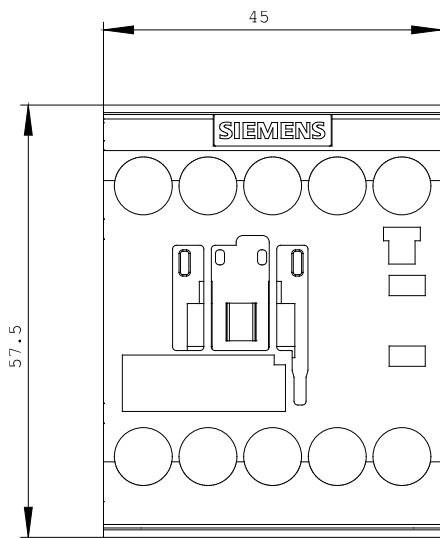

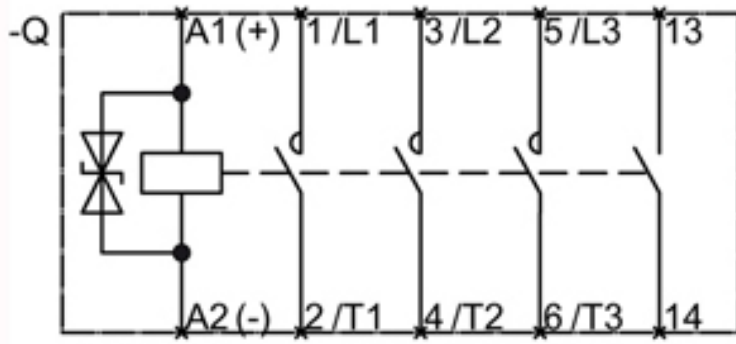

last change:

Feb 15, 2013