



power contactor, AC-3 9 A, 4 kW / 400 V 1 NO + 1 NC, 400 V AC, 50 Hz  
240 V, 60 Hz, 3-pole Size S0, screw terminal

|                                                                                                       |                            |
|-------------------------------------------------------------------------------------------------------|----------------------------|
| product brand name                                                                                    | SIRIUS                     |
| product designation                                                                                   | Power contactor            |
| product type designation                                                                              | 3RT2                       |
| <b>General technical data</b>                                                                         |                            |
| size of contactor                                                                                     | S0                         |
| product extension                                                                                     |                            |
| • function module for communication                                                                   | No                         |
| • auxiliary switch                                                                                    | Yes                        |
| power loss [W] for rated value of the current                                                         |                            |
| • at AC in hot operating state                                                                        | 1.2 W                      |
| • at AC in hot operating state per pole                                                               | 0.4 W                      |
| • without load current share typical                                                                  | 7.9 W                      |
| insulation voltage                                                                                    |                            |
| • of main circuit with degree of pollution 3 rated value                                              | 690 V                      |
| • of auxiliary circuit with degree of pollution 3 rated value                                         | 690 V                      |
| surge voltage resistance                                                                              |                            |
| • of main circuit rated value                                                                         | 6 kV                       |
| • of auxiliary circuit rated value                                                                    | 6 kV                       |
| maximum permissible voltage for safe isolation between coil and main contacts according to EN 60947-1 | 400 V                      |
| shock resistance at rectangular impulse                                                               |                            |
| • at AC                                                                                               | 7,5g / 5 ms, 4,7g / 10 ms  |
| shock resistance with sine pulse                                                                      |                            |
| • at AC                                                                                               | 11,8g / 5 ms, 7,4g / 10 ms |
| mechanical service life (switching cycles)                                                            |                            |
| • of contactor typical                                                                                | 10 000 000                 |
| • of the contactor with added electronically optimized auxiliary switch block typical                 | 5 000 000                  |
| • of the contactor with added auxiliary switch block typical                                          | 10 000 000                 |
| reference code according to IEC 81346-2                                                               | Q                          |
| Substance Prohibitance (Date)                                                                         | 10/01/2009                 |
| <b>Ambient conditions</b>                                                                             |                            |
| installation altitude at height above sea level maximum                                               | 2 000 m                    |
| ambient temperature                                                                                   |                            |
| • during operation                                                                                    | -25 ... +60 °C             |
| • during storage                                                                                      | -55 ... +80 °C             |
| relative humidity minimum                                                                             | 10 %                       |
| relative humidity at 55 °C according to IEC 60068-2-30 maximum                                        | 95 %                       |

| Main circuit                                                      |                    |
|-------------------------------------------------------------------|--------------------|
| number of poles for main current circuit                          | 3                  |
| number of NO contacts for main contacts                           | 3                  |
| operating voltage                                                 |                    |
| • at AC-3 rated value maximum                                     | 690 V              |
| • at AC-3e rated value maximum                                    | 690 V              |
| operational current                                               |                    |
| • at AC-1 at 400 V at ambient temperature 40 °C rated value       | 40 A               |
| • at AC-1                                                         |                    |
| — up to 690 V at ambient temperature 40 °C rated value            | 40 A               |
| — up to 690 V at ambient temperature 60 °C rated value            | 35 A               |
| • at AC-3                                                         |                    |
| — at 400 V rated value                                            | 9 A                |
| — at 500 V rated value                                            | 9 A                |
| — at 690 V rated value                                            | 9 A                |
| • at AC-3e                                                        |                    |
| — at 400 V rated value                                            | 9 A                |
| — at 500 V rated value                                            | 9 A                |
| — at 690 V rated value                                            | 9 A                |
| • at AC-4 at 400 V rated value                                    | 8.5 A              |
| • at AC-5a up to 690 V rated value                                | 35.2 A             |
| • at AC-5b up to 400 V rated value                                | 7.4 A              |
| • at AC-6a                                                        |                    |
| — up to 230 V for current peak value n=20 rated value             | 11.4 A             |
| — up to 400 V for current peak value n=20 rated value             | 11.4 A             |
| — up to 500 V for current peak value n=20 rated value             | 9.1 A              |
| — up to 690 V for current peak value n=20 rated value             | 9 A                |
| • at AC-6a                                                        |                    |
| — up to 230 V for current peak value n=30 rated value             | 7.6 A              |
| — up to 400 V for current peak value n=30 rated value             | 7.6 A              |
| — up to 500 V for current peak value n=30 rated value             | 6.1 A              |
| — up to 690 V for current peak value n=30 rated value             | 6.1 A              |
| minimum cross-section in main circuit at maximum AC-1 rated value | 10 mm <sup>2</sup> |
| operational current for approx. 200000 operating cycles at AC-4   |                    |
| • at 400 V rated value                                            | 4.1 A              |
| • at 690 V rated value                                            | 3.3 A              |
| operational current                                               |                    |
| • at 1 current path at DC-1                                       |                    |
| — at 24 V rated value                                             | 35 A               |
| — at 110 V rated value                                            | 4.5 A              |
| — at 220 V rated value                                            | 1 A                |
| — at 440 V rated value                                            | 0.4 A              |
| — at 600 V rated value                                            | 0.25 A             |
| • with 2 current paths in series at DC-1                          |                    |
| — at 24 V rated value                                             | 35 A               |
| — at 110 V rated value                                            | 35 A               |
| — at 220 V rated value                                            | 5 A                |
| — at 440 V rated value                                            | 1 A                |
| — at 600 V rated value                                            | 0.8 A              |
| • with 3 current paths in series at DC-1                          |                    |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 35 A<br>35 A<br>35 A<br>2.9 A<br>1.4 A                                                                                                                                                                                                                                                                      |
| <ul style="list-style-type: none"> <li>● <b>at 1 current path at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> <li>● <b>with 2 current paths in series at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> <li>● <b>with 3 current paths in series at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul> | 20 A<br>2.5 A<br>1 A<br>0.09 A<br>0.06 A<br><br>35 A<br>15 A<br>3 A<br>0.27 A<br>0.16 A<br><br>35 A<br>35 A<br>10 A<br>0.6 A<br>0.6 A                                                                                                                                                                       |
| <b>operating power</b> <ul style="list-style-type: none"> <li>● at AC-2 at 400 V rated value</li> <li>● at AC-3 <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> <li>● at AC-3e <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul>                                                                                                                                                                                                                                                                                                                                                        | 4 kW<br><br>2.2 kW<br>4 kW<br>4 kW<br>7.5 kW<br><br>2.2 kW<br>4 kW<br>4 kW<br>7.5 kW                                                                                                                                                                                                                        |
| <b>operating power for approx. 200000 operating cycles at AC-4</b> <ul style="list-style-type: none"> <li>● at 400 V rated value</li> <li>● at 690 V rated value</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 2 kW<br>2.5 kW                                                                                                                                                                                                                                                                                              |
| <b>operating apparent power at AC-6a</b> <ul style="list-style-type: none"> <li>● up to 230 V for current peak value n=20 rated value</li> <li>● up to 400 V for current peak value n=20 rated value</li> <li>● up to 500 V for current peak value n=20 rated value</li> <li>● up to 690 V for current peak value n=20 rated value</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 4.5 kVA<br>7.8 kVA<br>7.8 kVA<br>10.7 kVA                                                                                                                                                                                                                                                                   |
| <b>operating apparent power at AC-6a</b> <ul style="list-style-type: none"> <li>● up to 230 V for current peak value n=30 rated value</li> <li>● up to 400 V for current peak value n=30 rated value</li> <li>● up to 500 V for current peak value n=30 rated value</li> <li>● up to 690 V for current peak value n=30 rated value</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 3 kVA<br>5.2 kVA<br>5.2 kVA<br>7.2 kVA                                                                                                                                                                                                                                                                      |
| <b>short-time withstand current in cold operating state up to 40 °C</b> <ul style="list-style-type: none"> <li>● limited to 1 s switching at zero current maximum</li> <li>● limited to 5 s switching at zero current maximum</li> <li>● limited to 10 s switching at zero current maximum</li> <li>● limited to 30 s switching at zero current maximum</li> <li>● limited to 60 s switching at zero current maximum</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                           | 170 A; Use minimum cross-section acc. to AC-1 rated value<br>170 A; Use minimum cross-section acc. to AC-1 rated value<br>122 A; Use minimum cross-section acc. to AC-1 rated value<br>78 A; Use minimum cross-section acc. to AC-1 rated value<br>68 A; Use minimum cross-section acc. to AC-1 rated value |
| <b>no-load switching frequency</b> <ul style="list-style-type: none"> <li>● at AC</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 5 000 1/h                                                                                                                                                                                                                                                                                                   |
| <b>operating frequency</b> <ul style="list-style-type: none"> <li>● at AC-1 maximum</li> <li>● at AC-2 maximum</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1 000 1/h<br>1 000 1/h                                                                                                                                                                                                                                                                                      |

|                                                                                                                                                                                                                                                                                                           |                                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• at AC-3 maximum</li> <li>• at AC-3e maximum</li> <li>• at AC-4 maximum</li> </ul>                                                                                                                                                                                | 1 000 1/h<br>1 000 1/h<br>300 1/h                    |
| <b>Control circuit/ Control</b>                                                                                                                                                                                                                                                                           |                                                      |
| <b>type of voltage of the control supply voltage</b>                                                                                                                                                                                                                                                      | AC                                                   |
| <b>control supply voltage at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> <li>• at 60 Hz rated value</li> </ul>                                                                                                                                                              | 400 V<br>400 ... 440 V                               |
| <b>operating range factor control supply voltage rated value of magnet coil at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>                                                                                                                                    | 0.8 ... 1.1<br>0.85 ... 1.1                          |
| <b>apparent pick-up power of magnet coil at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>                                                                                                                                                                       | 68 VA<br>67 VA                                       |
| <b>inductive power factor with closing power of the coil</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>                                                                                                                                                             | 0.72<br>0.74                                         |
| <b>apparent holding power of magnet coil at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>                                                                                                                                                                       | 7.9 VA<br>6.5 VA                                     |
| <b>inductive power factor with the holding power of the coil</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>                                                                                                                                                         | 0.25<br>0.28                                         |
| <b>closing delay</b> <ul style="list-style-type: none"> <li>• at AC</li> </ul>                                                                                                                                                                                                                            | 8 ... 40 ms                                          |
| <b>opening delay</b> <ul style="list-style-type: none"> <li>• at AC</li> </ul>                                                                                                                                                                                                                            | 4 ... 16 ms                                          |
| <b>arcing time</b>                                                                                                                                                                                                                                                                                        | 10 ... 10 ms                                         |
| <b>control version of the switch operating mechanism</b>                                                                                                                                                                                                                                                  | Standard A1 - A2                                     |
| <b>Auxiliary circuit</b>                                                                                                                                                                                                                                                                                  |                                                      |
| number of NC contacts for auxiliary contacts instantaneous contact                                                                                                                                                                                                                                        | 1                                                    |
| number of NO contacts for auxiliary contacts instantaneous contact                                                                                                                                                                                                                                        | 1                                                    |
| operational current at AC-12 maximum                                                                                                                                                                                                                                                                      | 10 A                                                 |
| <b>operational current at AC-15</b> <ul style="list-style-type: none"> <li>• at 230 V rated value</li> <li>• at 400 V rated value</li> <li>• at 500 V rated value</li> <li>• at 690 V rated value</li> </ul>                                                                                              | 10 A<br>3 A<br>2 A<br>1 A                            |
| <b>operational current at DC-12</b> <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 48 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 125 V rated value</li> <li>• at 220 V rated value</li> <li>• at 600 V rated value</li> </ul> | 10 A<br>6 A<br>6 A<br>3 A<br>2 A<br>1 A<br>0.15 A    |
| <b>operational current at DC-13</b> <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 48 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 125 V rated value</li> <li>• at 220 V rated value</li> <li>• at 600 V rated value</li> </ul> | 10 A<br>2 A<br>2 A<br>1 A<br>0.9 A<br>0.3 A<br>0.1 A |
| <b>contact reliability of auxiliary contacts</b>                                                                                                                                                                                                                                                          | 1 faulty switching per 100 million (17 V, 1 mA)      |
| <b>UL/CSA ratings</b>                                                                                                                                                                                                                                                                                     |                                                      |
| <b>full-load current (FLA) for 3-phase AC motor</b>                                                                                                                                                                                                                                                       |                                                      |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                              | 7.6 A<br>9 A                                                                                                                                                                                                                                                       |
| <b>yielded mechanical performance [hp]</b> <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>• for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul>                                                                                      | 1 hp<br>1 hp<br><br>2 hp<br>3 hp<br>5 hp<br>7.5 hp                                                                                                                                                                                                                 |
| <b>contact rating of auxiliary contacts according to UL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | A600 / P600                                                                                                                                                                                                                                                        |
| <b>Short-circuit protection</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                    |
| <b>design of the fuse link</b> <ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>— with type of coordination 1 required</li> <li>— with type of assignment 2 required</li> </ul> </li> <li>• for short-circuit protection of the auxiliary switch required</li> </ul>                                                                                                                                                                                                  | gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA)<br>gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA)<br>gG: 10 A (500 V, 1 kA)                                                                                                   |
| <b>Installation/ mounting/ dimensions</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                    |
| <b>mounting position</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface                                                                                                                               |
| <b>fastening method</b> <ul style="list-style-type: none"> <li>• side-by-side mounting</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                     | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715<br>Yes                                                                                                                                                                      |
| <b>height</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 85 mm                                                                                                                                                                                                                                                              |
| <b>width</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 45 mm                                                                                                                                                                                                                                                              |
| <b>depth</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 97 mm                                                                                                                                                                                                                                                              |
| <b>required spacing</b> <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | 10 mm<br>10 mm<br>10 mm<br>0 mm<br><br>10 mm<br>10 mm<br>6 mm<br>10 mm<br><br>10 mm<br>10 mm<br>10 mm<br>6 mm                                                                                                                                                      |
| <b>Connections/ Terminals</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                    |
| <b>type of electrical connection</b> <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control circuit</li> <li>• at contactor for auxiliary contacts</li> <li>• of magnet coil</li> </ul>                                                                                                                                                                                                                                                                                                               | screw-type terminals<br>screw-type terminals<br>Screw-type terminals<br>Screw-type terminals                                                                                                                                                                       |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG cables for main contacts</li> </ul>                                                                                                                                                                                                                                      | 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 10 mm <sup>2</sup> )<br>2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 10 mm <sup>2</sup> )<br>2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup><br>2x (16 ... 12), 2x (14 ... 8) |
| <b>connectable conductor cross-section for main contacts</b> <ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> <li>• finely stranded with core end processing</li> </ul>                                                                                                                                                                                                                                                                                                                                                        | 1 ... 10 mm <sup>2</sup><br>1 ... 10 mm <sup>2</sup><br>1 ... 10 mm <sup>2</sup>                                                                                                                                                                                   |

|                                                                                                                                                                                                                                                       |                                                                                                                                                                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>connectable conductor cross-section for auxiliary contacts</b>                                                                                                                                                                                     |                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• solid or stranded</li> <li>• finely stranded with core end processing</li> </ul>                                                                                                                             | 0.5 ... 2.5 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup>                                                                                                                       |
| <b>type of connectable conductor cross-sections</b>                                                                                                                                                                                                   |                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG cables for auxiliary contacts</li> </ul> | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 16), 2x (18 ... 14) |
| <b>AWG number as coded connectable conductor cross section</b>                                                                                                                                                                                        |                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• for main contacts</li> <li>• for auxiliary contacts</li> </ul>                                                                                                                                               | 16 ... 8<br>20 ... 14                                                                                                                                                            |

| Safety related data                                                                                                                                   |                                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|
| <b>product function</b>                                                                                                                               |                                                  |
| <ul style="list-style-type: none"> <li>• mirror contact according to IEC 60947-4-1</li> </ul>                                                         | Yes                                              |
| B10 value with high demand rate according to SN 31920                                                                                                 | 450 000                                          |
| <b>proportion of dangerous failures</b>                                                                                                               |                                                  |
| <ul style="list-style-type: none"> <li>• with low demand rate according to SN 31920</li> <li>• with high demand rate according to SN 31920</li> </ul> | 40 %<br>73 %                                     |
| failure rate [FIT] with low demand rate according to SN 31920                                                                                         | 100 FIT                                          |
| <b>protection class IP on the front according to IEC 60529</b>                                                                                        | IP20                                             |
| <b>touch protection on the front according to IEC 60529</b>                                                                                           | finger-safe, for vertical contact from the front |
| <b>suitability for use</b>                                                                                                                            |                                                  |
| <ul style="list-style-type: none"> <li>• safety-related switching on</li> <li>• safety-related switching OFF</li> </ul>                               | Yes<br>Yes                                       |

| Certificates/ approvals         |
|---------------------------------|
| <b>General Product Approval</b> |



[Confirmation](#)



[KC](#)



| EMC | Functional Safety/Safety of Machinery | Declaration of Conformity | Test Certificates |
|-----|---------------------------------------|---------------------------|-------------------|
|-----|---------------------------------------|---------------------------|-------------------|



[Type Examination Certificate](#)

[UK Declaration of Conformity](#)



EG-Konf.

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

| Marine / Shipping |
|-------------------|
|-------------------|



| other |
|-------|
|-------|

[Confirmation](#)



## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2023-1AR60>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2023-1AR60>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2023-1AR60>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2023-1AR60&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2023-1AR60&lang=en)


Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2023-1AR60/char>


Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2023-1AR60&objecttype=14&gridview=view1>

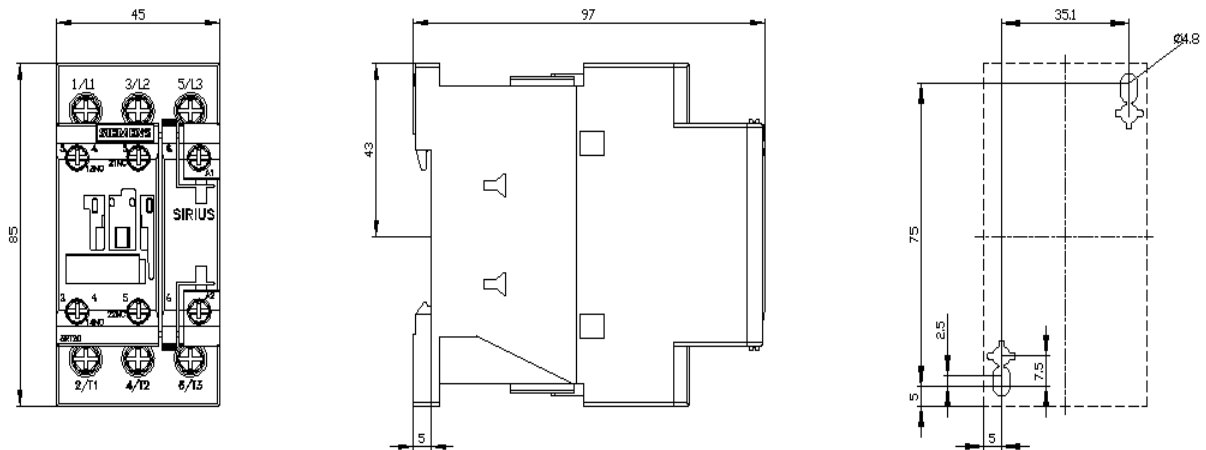

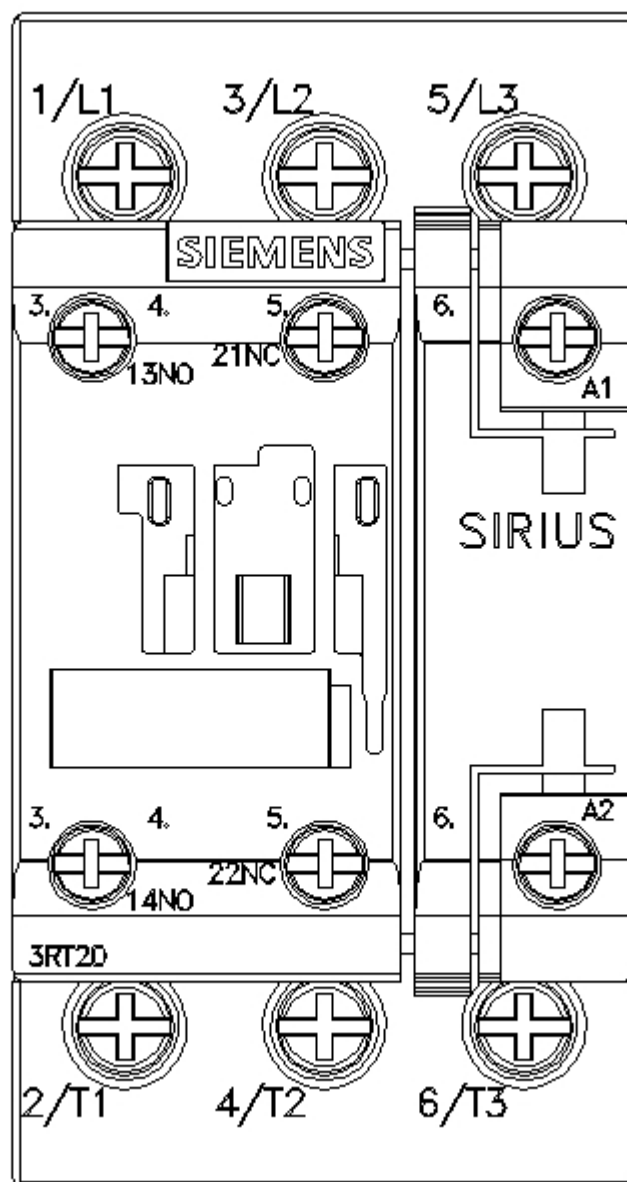



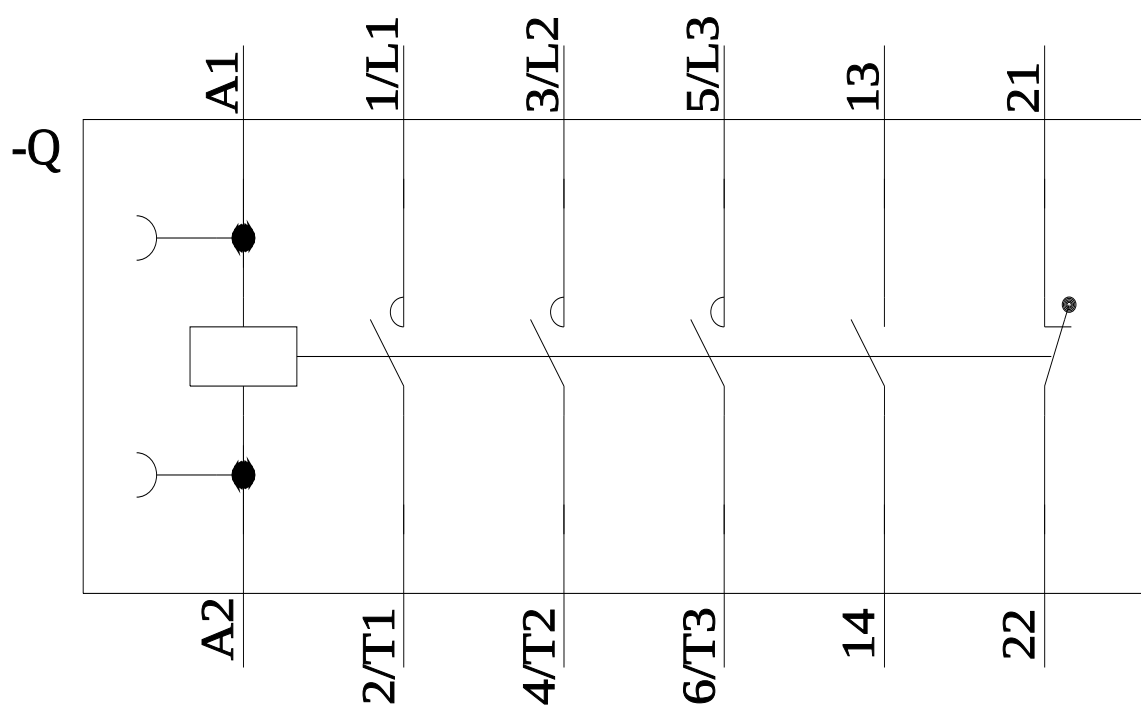

last modified:

3/30/2022 