



2NO+2NC CONTACTOR,
AC3: 11KW DC 24V 4-POLE, 2NO+2NC,
SZ: S0,
SPRING-LOADED TERMINAL 1NO+1NC INTEGR.

Certificates/approvals:				
General Product Approval			EMC	Functional Safety / Safety of Machinery
 CCC	 CSA	 GOST	 UL	 C-TICK
Declaration of Conformity		Test Certificates		
 EG-Konf.	Special Test Certificate	Type Test Certificates/Test Report		
Shipping Approval				
 ABS	 BUREAU VERITAS	 DNV	 GL	 LRS
Shipping Approval		other		
 RINA	 RMRS	Confirmation		
		 VDE		
Further information:				

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator



<http://www.siemens.com/cax>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RT2526-2BB40/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT2526-2BB40

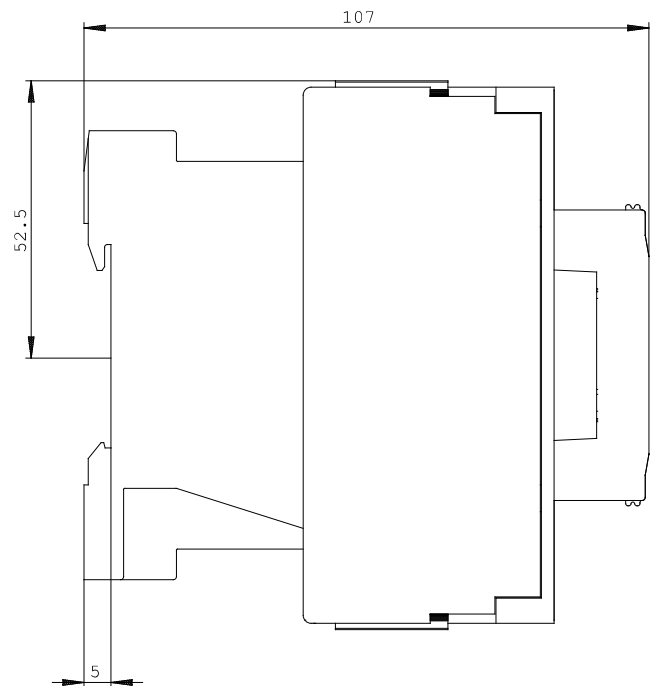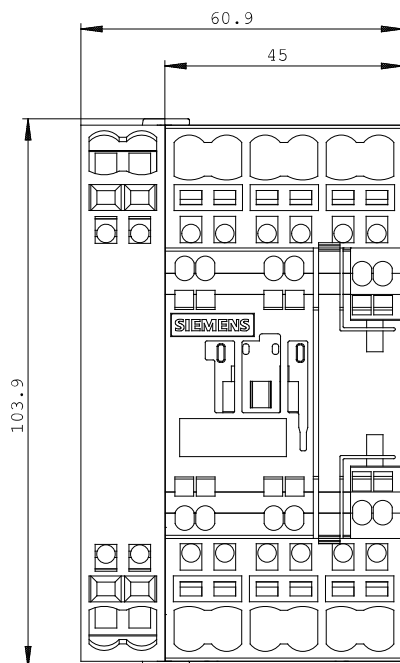

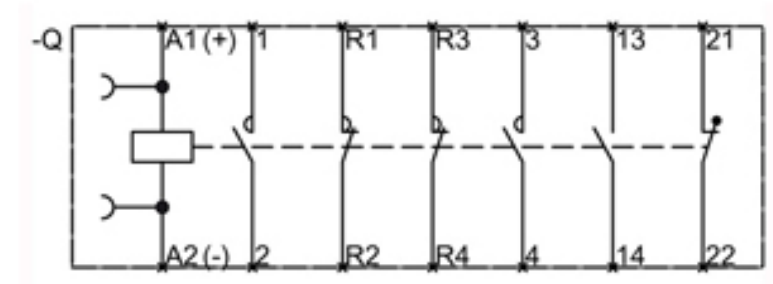

last change: