



OVERLOAD RELAY, 14...20 A, 1NO+1NC,
SIZE S0,
MAIN CUR.: SCREW CONNECTION AUX. CUR...: CAGE
CLAMP FOR INDIVIDUAL INSTALLATION

General technical data:

product brand name		SIRIUS
Product designation		thermal overload relay
Size of overload relay		S0
Number of poles / for main current circuit		3
Product function / removable terminal for auxiliary and control circuit		No
Impulse voltage resistance / rated value	kV	6
Protection class IP / on the front		IP20
Protection against electrical shock		finger-safe
Installation altitude / at a height over sea level / maximum	m	2,000
Resistance against shock		8g / 10 ms
Ambient temperature		
• during transport	°C	-55 ... +80
• during storage	°C	-55 ... +80
• during operating	°C	-20 ... +70
Relative humidity / during operating phase / maximum	%	100
Type of protection		DMT 98 ATEX G 001
Active power loss / total / typical	W	6
Size of the contactor / can be combined / company-specific		S0

Main circuit:		
Operating current / of the fuse link / rated value	A	50
Service power / at AC-3 • at 400 V	kW	7.5
Type of assignment		2
Auxiliary circuit:		
Number of NC contacts / for auxiliary contacts		1
Number of NO contacts / for auxiliary contacts		1
Number of changeover contacts / for auxiliary contacts		0
Design of the fuse link / for short-circuit protection of the auxiliary switch / required		fuse gL/gG: 6 A, quick: 10 A
Operating current / of the auxiliary contacts / at AC-15 • at 24 V • at 110 V • at 120 V • at 125 V • at 230 V • at 400 V	A A A A A A	3 3 3 3 2 1
Operating current / of the auxiliary contacts / at DC-13 • at 24 V • at 110 V • at 125 V • at 220 V	A A A A	1 0.22 0.22 0.11
Protection function:		
Trip class		CLASS 10
Adjustable response current • of the current-dependent overload release	A	14 ... 20
Installation/mounting/dimensions:		
Mounting type		stand-alone installation
mounting position		with vertical mounting surface +/-135° rotatable, with vertical mounting surface +/- 45° tiltable to the front and back
Depth	mm	96
Height	mm	97
Width	mm	45
Connections:		
Design of the electrical connection • for main current circuit		screw-type terminals

- for auxiliary and control current circuit

Type of the connectable conductor cross-section

- for main contacts
 - solid
 - finely stranded
 - with conductor end processing
- for AWG conductors / for main contacts
- for auxiliary contacts
 - solid
 - finely stranded
 - without conductor final cutting
 - with conductor end processing
- for AWG conductors / for auxiliary contacts

Cage Clamp terminals

1x (1 ... 2.5 mm²), 1x (2.5 ... 10 mm²)

1x (1 ... 2.5 mm²), 1x (2.5 ... 6 mm²), 1x 10 mm²

1x (16 ... 12), 1x (14 ... 8)

2x (0.5 ... 2.5 mm²)

2x (0.5 ... 1.5 mm²)

2x (0.5 ... 1.5 mm²)

2x (20 ... 14)

Certificates/approvals:

General Product Approval



CCC



CSA



UL



EG-Konf.

Test Certificates

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

Shipping Approval



ABS



BUREAU
VERITAS



DNV



GL



LRS



RINA

Shipping Approval

other



RMRS

[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RU1126-4BD1/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RU1126-4BD1

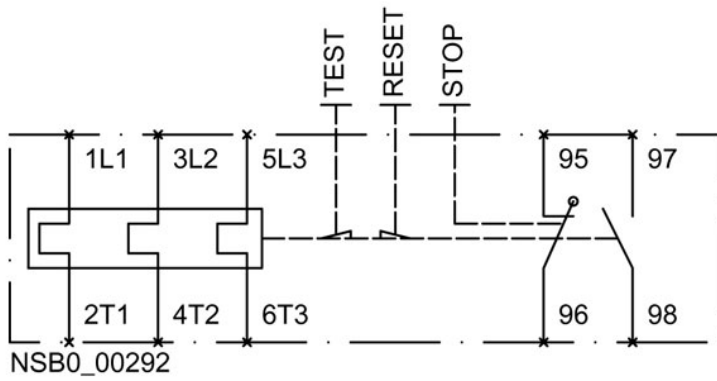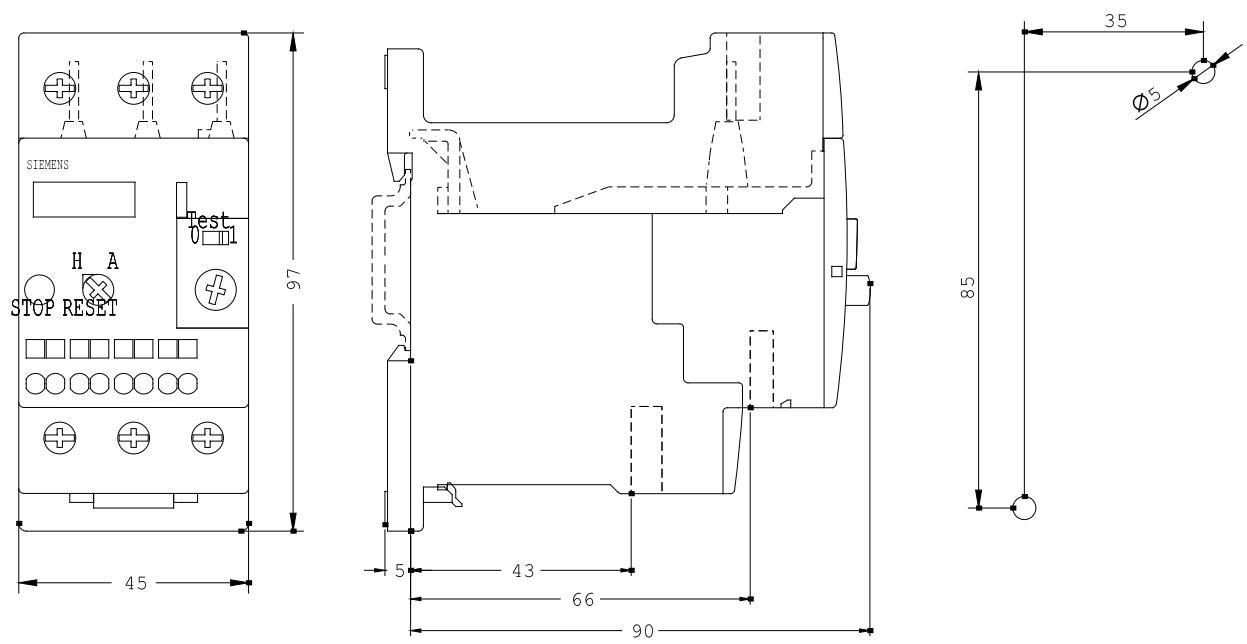

last change:

Mar 17, 2014