



Stand-alone assembly support for 3RU21/3RB30/3RB31/3RR2 Size S2 Stand-alone installation Main circuit: screw Reusable packaging Pack = 36 units

product category	Terminal support
product designation	individual mount
General technical data	
size of overload relay	S2
protection class IP on the front	
• according to IEC 60529	IP20
Substance Prohibittance (Date)	10/15/2014
Weight	0.162 kg
Ambient conditions	
ambient temperature	
• during operation	-20 ... +70 °C
• during storage	-50 ... +80 °C
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Installation/ mounting/ dimensions	
fastening method	screw and snap-on mounting onto 35 mm DIN rail
height	105 mm
width	55 mm
depth	110 mm
Connections/ Terminals	
type of electrical connection	
• for main current circuit	screw-type terminals
type of connectable conductor cross-sections	
• for main contacts	
— solid	1x (1 ... 50 mm²)
— stranded	1x (1 ... 50 mm²)
— finely stranded with core end processing	1x (1 ... 35 mm²)
• for AWG cables for main contacts	1x (18 ... 1)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2936-3AA01-Z X95>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2936-3AA01-Z X95>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RU2936-3AA01-Z X95>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2936-3AA01-Z X95&lang=en

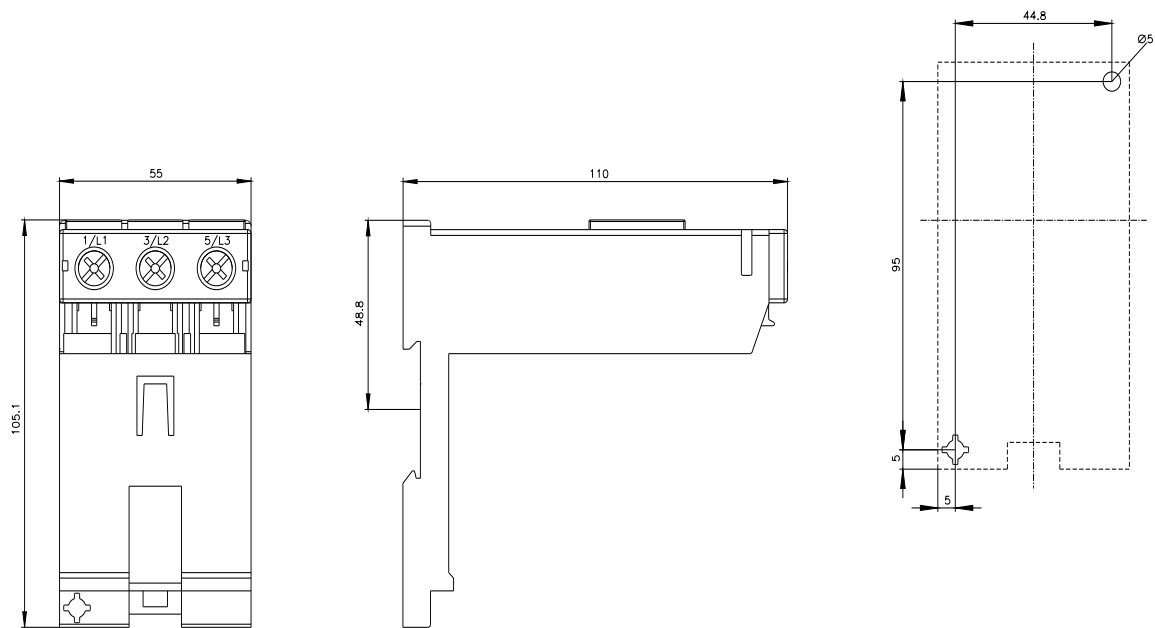

last modified:

1/10/2024 