

MOTOR STARTER PROTECTOR S. S00, FOR MOTOR PROTECTION, CLASS 10, A-REL. 9...12A, N-REL. 156A, CAGE CLAMP TERMINAL, STANDARD SWITCHING CAPACITY MULTI-UNIT PACKAGING 1 PACK = 24 UNITS



Figure similar

|                       |                      |
|-----------------------|----------------------|
| product brand name    | SIRIUS               |
| Product designation   | circuit breaker      |
| Design of the product | for motor protection |

| General technical data                     |             |
|--------------------------------------------|-------------|
| Product extension                          |             |
| • Auxiliary switch                         | Yes         |
| Power loss [W] total typical               | 7 W         |
| Surge voltage resistance rated value       | 6 000 V     |
| Protection class IP                        |             |
| • on the front                             | IP20        |
| Shock resistance                           | 25g / 11 ms |
| Mechanical service life (switching cycles) |             |
| • of the main contacts typical             | 100 000     |

| Ambient conditions                                      |         |
|---------------------------------------------------------|---------|
| Installation altitude at height above sea level maximum | 2 000 m |
| Ambient temperature                                     |         |

|                    |                |
|--------------------|----------------|
| • during operation | -20 ... +60 °C |
| • during storage   | -50 ... +80 °C |
| • during transport | -50 ... +80 °C |

#### Main circuit

|                                                                                   |            |
|-----------------------------------------------------------------------------------|------------|
| <b>Number of poles for main current circuit</b>                                   | 3          |
| <b>Adjustable pick-up value current of the current-dependent overload release</b> | 9 ... 12 A |
| <b>Operating voltage</b>                                                          |            |
| • rated value                                                                     | 690 V      |
| • at AC-3 rated value maximum                                                     | 690 V      |
| <b>Operating current</b>                                                          |            |
| • at AC-3                                                                         |            |
| — at 400 V rated value                                                            | 12 A       |
| <b>Operating power</b>                                                            |            |
| • at AC-3                                                                         |            |
| — at 400 V rated value                                                            | 5.5 kW     |
| <b>Operating frequency</b>                                                        |            |
| • at AC-3 maximum                                                                 | 15 1/h     |

#### Auxiliary circuit

|                              |   |
|------------------------------|---|
| <b>Number of CO contacts</b> |   |
| • for auxiliary contacts     | 0 |

#### Protective and monitoring functions

|                                                              |          |
|--------------------------------------------------------------|----------|
| <b>Trip class</b>                                            | CLASS 10 |
| <b>Maximum short-circuit current breaking capacity (Icu)</b> |          |
| • at AC at 240 V rated value                                 | 100 kA   |
| • at AC at 400 V rated value                                 | 50 kA    |
| • at AC at 500 V rated value                                 | 3 kA     |
| • at AC at 690 V rated value                                 | 2 kA     |

#### Short-circuit protection

|                                                                    |                |
|--------------------------------------------------------------------|----------------|
| <b>Design of the overcurrent release and short-circuit release</b> | thermomagnetic |
|--------------------------------------------------------------------|----------------|

#### Installation/ mounting/ dimensions

|                              |                                                                                        |
|------------------------------|----------------------------------------------------------------------------------------|
| <b>Mounting position</b>     | any                                                                                    |
| <b>Mounting type</b>         | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022 |
| <b>Height</b>                | 90 mm                                                                                  |
| <b>Width</b>                 | 45 mm                                                                                  |
| <b>Depth</b>                 | 81 mm                                                                                  |
| <b>Required spacing</b>      |                                                                                        |
| • with side-by-side mounting |                                                                                        |
| — Backwards                  | 0 mm                                                                                   |

— at the side

0 mm

## Connections/Terminals

|                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product function</b> <ul style="list-style-type: none"> <li>removable terminal for auxiliary and control circuit</li> </ul>                                                                                                                                                                                                                           | No                                                                                                                                   |
| <b>Type of electrical connection</b> <ul style="list-style-type: none"> <li>for main current circuit</li> <li>for auxiliary and control current circuit</li> </ul>                                                                                                                                                                                       | spring-loaded terminals<br>spring-loaded terminals                                                                                   |
| <b>Arrangement of electrical connectors for main current circuit</b>                                                                                                                                                                                                                                                                                     | front side                                                                                                                           |
| <b>Type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>for main contacts               <ul style="list-style-type: none"> <li>— solid</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>at AWG conductors for main contacts</li> </ul> | 2x (0.25 ... 2.5 mm <sup>2</sup> )<br>2x (0.25 ... 1.5 mm <sup>2</sup> )<br>2x (0.25 ... 2.5 mm <sup>2</sup> )<br><br>2x (24 ... 14) |

## Certificates/approvals

### General Product Approval



### Declaration of Conformity



EG-Konf.

### Test Certificates

[spezielle Prüfbescheinigungen](#)

[n](#)



ABS



BUREAU VERITAS



DNV



LRS

### Shipping Approval

### other



RINA



RMRS

[Umweltbestätigung](#)

[sonstig](#)

[Bestätigungen](#)



VDE

## Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV1011-1KA20-Z W97>

**Cax online generator**


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1011-1KA20-Z W97>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1011-1KA20-Z W97>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV1011-1KA20-Z W97&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1011-1KA20-Z W97&lang=en)

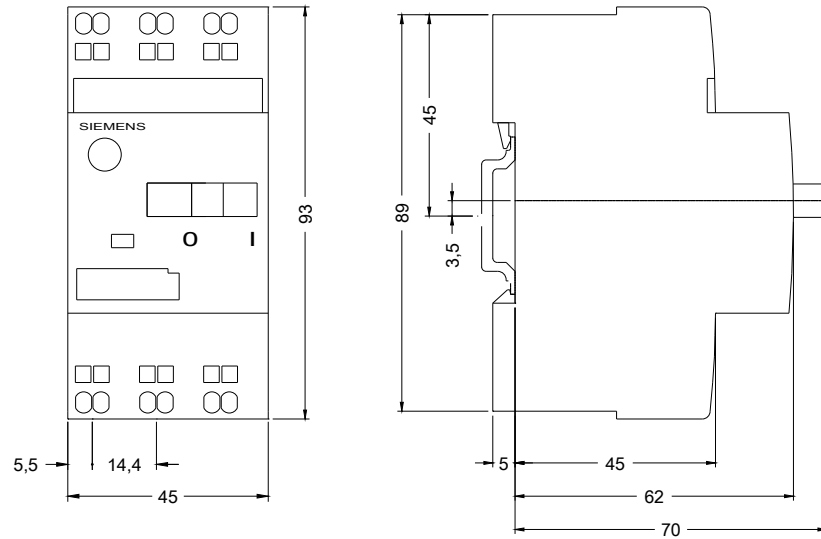



last modified:

09/20/2016