# **SIEMENS**

Product data sheet 3RV1063-7DL10

MOLDED CASE CIRC.BREAKER 3RV1 FOR MOTOR PROTECTION STANDARD SWITCHING CAPACITY RATED CURRENT IN=200A ELECTRONIC RELEASE SHORT-CIRCUIT PROTECTION ADJUSTABLE 6-13XLN OVERLOAD PROTECTION UEL 0.4-1XLN, CLASS 10A-30 ICU =120KA AT 400V 3-POLE, SCREW TERMINAL INCL. PHASE BARRIERS

| General technical data:  |    |                             |
|--|----|-----------------------------|
| product brand name   |    | SIRIUS                      |
| Product designation  |    | molded-case circuit breaker |
| Size of the circuit-breaker  |    | 3RV1.6                      |
| Number of poles / for main current circuit                               |    | 3                           |
| Product function   |    |                             |
| <ul> <li>removable terminal for auxiliary and control circuit</li> </ul> |    | No                          |
| overload protection  |    | Yes                         |
| phase disturbance recognition  |    | Yes                         |
| short-circuit to earth recognition                                       |    | No                          |
| Product component  |    |                             |
| auxiliary switch   |    | No                          |
| undervoltage release mechanism   |    | No                          |
| trip indicator   |    | No                          |
| Product extension  |    |                             |
| auxiliary switch   |    | Yes                         |
| optional / motor drive   |    | No                          |
| Impulse voltage resistance / rated value                                 | V  | 8,000                       |
| Protection class IP / on the front                                       |    | IP20                        |
| Protection against electrical shock                                      |    | finger-safe                 |
| Installation altitude / at a height over sea level / maximum             | m  | 2,000                       |
| Resistance against shock   |    | 25g / 11 ms                 |
| Ambient temperature  |    |                             |
| during transport   | °C | -40 <b>+7</b> 0             |
| during storage   | °C | -40 +70                     |
| during operating   | °C | -25 +60                     |
|  |    |                             |

| Main circuit:                   |   |     |
|---------------------------------|---|-----|
| Operating voltage / rated value | V | 690 |

| Service power / at AC-3 / at 400 V / rated value                               | kW  | 110    |
|--|-----|--------|
| Operating current / at AC-3 / at 400 V / rated value                           | Α   | 250    |
| Mechanical operating cycles as operating time / of the main contacts / typical |     | 20,000 |
| Frequency of operation / with AC-3 / maximum                                   | 1/h | 15     |

Number of changeover contacts / for auxiliary contacts

0

# **Protection function:**

| Trip class  |   | CLASS 10, 20 and 30 adjustable |
|---|---|--------------------------------|
| Adjustable response current / of the current-dependent overload release | А | 80 200                         |

# Installation/mounting/dimensions:

| Mounting type     |    | screw fixing |
|-------------------|----|--------------|
| mounting position |    | any          |
| Depth             | mm | 103.5        |
| Height            | mm | 205          |
| Width             | mm | 105          |

Arrangement of electrical connectors / for main current circuit

## Design of the electrical connection

- for main current circuit
- for auxiliary and control current circuit

front side

screw-type terminals

screw-type terminals

# Certificates/approvals:

**General Product Approval** 

**Test Certificates** 



**Special Test** Certificate

# **Shipping Approval**













**Shipping Approval** 

other

Confirmation

**Declaration of** Conformity

other

Environmental Confirmations

# Further information:

#### Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

## Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

## Cax online generator:


http://www.siemens.com/cax


## Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3RV1063-7DL10/all

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3RV1063-7DL10

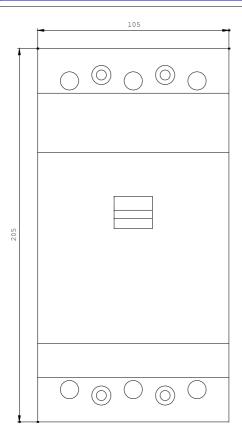

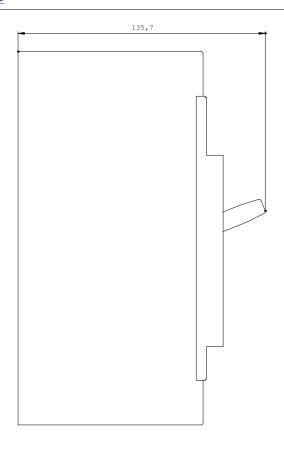

last change: Jul 7, 2014