


SOLDERING PIN CONNECTION LATERAL,
AUXILIARY CONTACT 1 NO+1 NC, SIZE S00

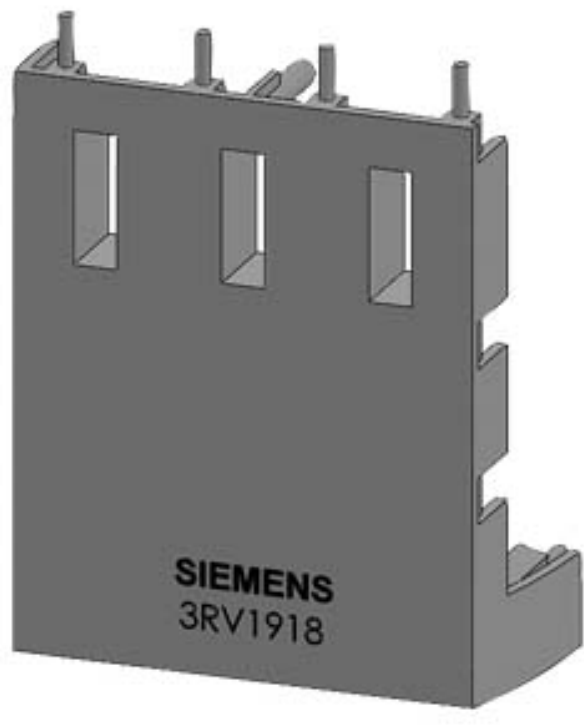

General technical data:		
product brand name		SIRIUS
Size of the circuit-breaker		S00
Ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +60
Auxiliary circuit:		
Number of NC contacts for auxiliary contacts instantaneous contact		0
Number of NO contacts for auxiliary contacts instantaneous contact		2
Number of CO contacts of auxiliary contacts instantaneous contact		0
Operating current		
• of auxiliary contacts		
— at AC-12		
— at 24 V	A	10
— at 230 V	A	10
— at 400 V	A	10

- at 690 V
- maximum
- at AC-15
 - at 24 V
 - at 230 V
 - at 400 V
- at DC-13
 - at 24 V
 - at 48 V
 - at 60 V
- at AC-15 at 690 V rated value

A	10
A	10
A	6
A	4
A	3
A	2
A	0.3
A	0.15
A	1

Connections/ Terminals:

Type of electrical connection for auxiliary and control current circuit

solder pin connectors

Certificates/ approvals:

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval	other
--------------------------	---------------------------	-------------------	-------------------	-------



UR



EG-Konf.

[spezielle Prüfbescheinigungen](#)
[n](#)



RMRS

[Bestätigungen](#)

other

[Umweltbestätigung](#)



VDE

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1918-5B>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1918-5B>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1918-5B&lang=en

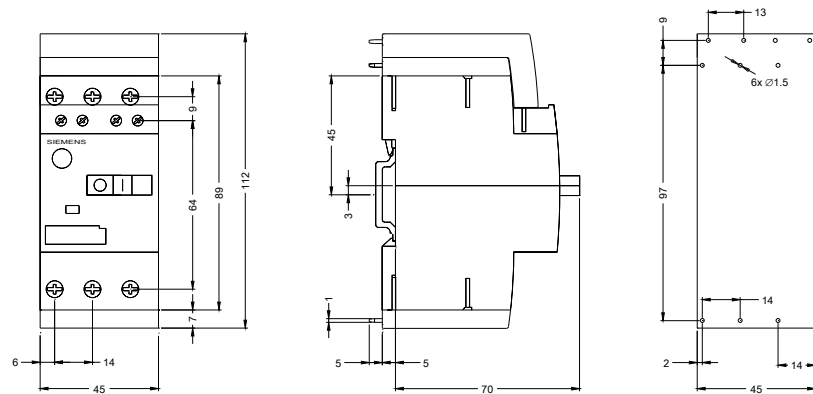

last modified:

10/07/2016