

CABLE CONNECTOR SIZE S00 SCREW CONNECTION



General technical data:

product brand name		SIRIUS
Size of the circuit-breaker		S0
Protection class IP / on the front		IP20
Ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +60
Ampacity / maximum	A	16

Installation/mounting/dimensions:

Width	mm	44.8
Height	mm	42
Depth	mm	54
Suitability for use / enables assembly of self-protected combination motor controllers (type E) acc. to UL 508		No

Certificates/approvals:

Certificate of suitability		CE / UL / CSA / CCC
----------------------------	--	---------------------

General Product Approval



Test Certificates

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

Shipping Approval



Shipping Approval

other



[Confirmation](#)



[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RV2917-5CA00/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RV2917-5CA00

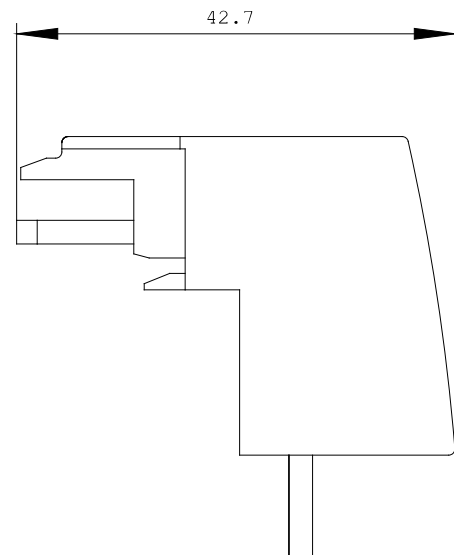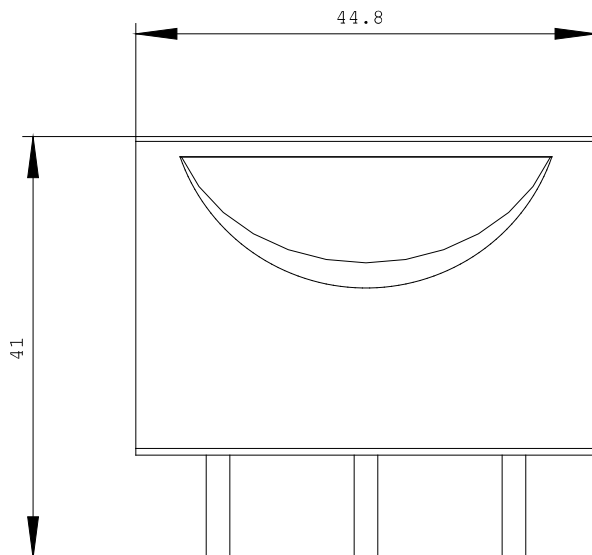

last change:

Nov 17, 2014