



CONTACTOR BASE

General technical data:

product brand name		SIRIUS
Product designation		Contacteur base
Size of the circuit-breaker		S00, S0
Design of the product		for configuration of direct and reversing starters
Acceptability for application		3RA2 load feeder

Installation/mounting/dimensions:

mounting position		any
Mounting type		snap-on mounting
Width	mm	44.8
Height	mm	159.8
Depth	mm	63.1
Distance, to be maintained, conductive elements • backwards	mm	0
Distance, to be maintained, to earthed part • backwards	mm	0
Distance, to be maintained, to the ranks assembly • backwards	mm	0

Certificates/approvals:

Verification of suitability

CE / UL / CSA / CCC

General Product Approval**Test Certificates**

CSA



UL

[Special Test Certificate](#)[Type Test Certificates/Test Report](#)**Shipping Approval**

ABS



BUREAU VERITAS



DNV



GL



LRS



PRS

Shipping Approval**other**

RINA




RMRS

[Confirmation](#)

VDE

[other](#)[Environmental Confirmations](#)**Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/industrial-controls/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/industrial-controls/mall>**CAX-Online-Generator**<http://www.siemens.com/cax>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WW/view/en/3RV2927-7AA00/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RV2927-7AA00

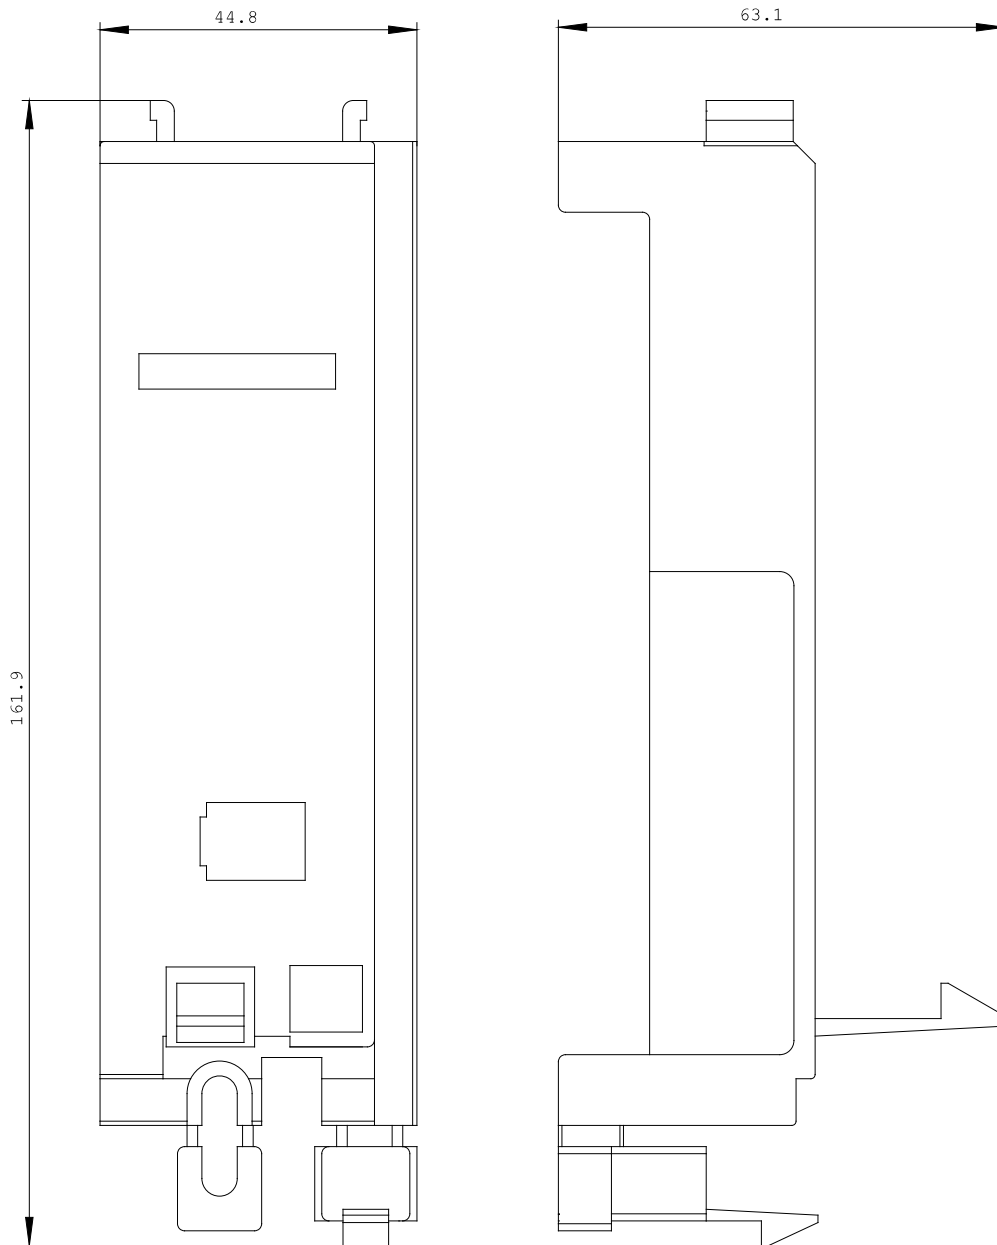

last change:

Jul 7, 2014