

DOOR-COUPLING ROTARY OPERATING MECHANISM, FOR CIRCUIT BREAKER SZ. S2, EMERGENCY OFF HANDLE NEW DESIGN



Figure similar

General technical data:		
product brand name		SIRIUS
Product designation		door-coupling rotary operating mechanism for heavy-duty operating conditions
Size of the circuit-breaker		S2
Design of the product		EMERGENCY OFF door-coupling rotary operating mechanism
Suitability for use		circuit-breakers S2
Protection class IP on the front		IP65
Ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +70
Operating frequency maximum	1/h	15
Color of the actuating element		red / yellow
Installation/ mounting/ dimensions:		
mounting position		any
Mounting type		screw fixing
Width	mm	75
Height	mm	75

Depth	mm	78
Length	mm	300
Diameter	mm	40
Required spacing for grounded parts		
• forwards	mm	0
• Backwards	mm	0
• upwards	mm	0
• at the side	mm	0
• downwards	mm	0

Certificates/ approvals:

Certificate of suitability

CE / UL / CSA

General Product Approval	Declaration of Conformity	Shipping Approval	other
--------------------------	---------------------------	-------------------	-------



[Bestätigungen](#)

[Umweltbestätigung](#)

other



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV29362C>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RV29362C>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV29362C&lang=en



last modified:

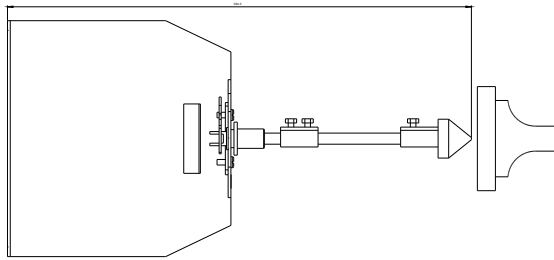

20.07.2015