



Figure similar

SIRIUS soft starter 200-480 V 1280 A, 110-250 V AC Screw terminals

|   |  |
|---|--|
| <b>product brand name</b>   | SIRIUS   |
| <b>product category</b>   | Hybrid switching devices   |
| <b>product designation</b>  | Soft starter   |
| <b>product type designation</b>   | 3RW55  |
| <b>manufacturer's article number</b>  |  |
| <ul style="list-style-type: none"> <li>• of high feature HMI module usable</li> <li>• of communication module PROFINET standard usable</li> <li>• of communication module PROFINET high-feature usable</li> <li>• of communication module PROFIBUS usable</li> <li>• of communication module Modbus TCP usable</li> <li>• of communication module Modbus RTU usable</li> <li>• of communication module Ethernet/IP</li> <li>• of circuit breaker usable at 400 V</li> <li>• of circuit breaker usable at 500 V</li> <li>• of the gG fuse usable up to 690 V</li> <li>• of full range R fuse link for semiconductor protection usable up to 690 V</li> <li>• of back-up R fuse link for semiconductor protection usable up to 690 V</li> </ul> | <ul style="list-style-type: none"> <li><a href="#">3RW5980-0HF00</a></li> <li><a href="#">3RW5980-0CS00</a></li> <li><a href="#">3RW5950-0CH00</a></li> <li><a href="#">3RW5980-0CP00</a></li> <li><a href="#">3RW5980-0CT00</a></li> <li><a href="#">3RW5980-0CR00</a></li> <li><a href="#">3RW5980-0CE00</a></li> <li><a href="#">3VA2716-7AB05-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10</a></li> <li><a href="#">3VA2716-7AB05-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10</a></li> <li>3x3NA3365-6; Type of coordination 1, Iq = 65 kA</li> <li><a href="#">3NB3357-1KK26; Type of coordination 2, Iq = 65 kA</a></li> <li>3x3NE3340-8; Type of coordination 2, Iq = 65 kA</li> </ul> |
| <b>General technical data</b>   |  |
| <b>starting voltage [%]</b>   | 20 ... 100 %   |
| <b>stopping voltage [%]</b>   | 50 ... 50 %  |
| <b>start-up ramp time of soft starter</b>   | 0 ... 360 s  |
| <b>ramp-down time of soft starter</b>   | 0 ... 360 s  |
| <b>start torque [%]</b>   | 10 ... 100 %   |
| <b>stopping torque [%]</b>  | 10 ... 100 %   |
| <b>torque limitation [%]</b>  | 20 ... 200 %   |
| <b>current limiting value [%] adjustable</b>  | 125 ... 800 %  |
| <b>breakaway voltage [%] adjustable</b>   | 40 ... 100 %   |
| <b>breakaway time adjustable</b>  | 0 ... 2 s  |
| <b>number of parameter sets</b>   | 3  |
| <b>accuracy class acc. to IEC 61557-12</b>  | 5 %  |
| <b>certificate of suitability</b>   |  |
| <ul style="list-style-type: none"> <li>• CE marking</li> <li>• UL approval</li> <li>• CSA approval</li> </ul>   | <ul style="list-style-type: none"> <li>Yes</li> <li>Yes</li> <li>Yes</li> </ul>  |
| <b>product component</b>  |  |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• HMI-High Feature</li> </ul>                              | Yes  |
| <ul style="list-style-type: none"> <li>• is supported HMI-High Feature</li> </ul>                 | Yes  |
| <b>product feature integrated bypass contact system</b>   | Yes  |
| <b>number of controlled phases</b>  | 3  |
| <b>trip class</b>   | CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2   |
| <b>current unbalance limiting value [%]</b>   | 10 ... 60 %  |
| <b>ground-fault monitoring limiting value [%]</b>   | 10 ... 95 %  |
| <b>buffering time in the event of power failure</b>   |  |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>                      | 100 ms   |
| <ul style="list-style-type: none"> <li>• for control circuit</li> </ul>                           | 100 ms   |
| <b>idle time adjustable</b>   | 0 ... 255 s  |
| insulation voltage rated value  | 480 V  |
| <b>degree of pollution</b>  | 3, acc. to IEC 60947-4-2   |
| <b>impulse voltage rated value</b>  | 6 kV   |
| <b>blocking voltage of the thyristor maximum</b>  | 1 400 V  |
| <b>service factor</b>   | 1.15   |
| <b>surge voltage resistance rated value</b>   | 6 kV   |
| <b>maximum permissible voltage for safe isolation</b>   |  |
| <ul style="list-style-type: none"> <li>• between main and auxiliary circuit</li> </ul>            | 480 V; does not apply for thermistor connection  |
| <b>shock resistance</b>   | 15 g / 11 ms, from 6 g / 11 ms with potential contact lifting  |
| <b>vibration resistance</b>   | 15 mm up to 6 Hz; 2 g up to 500 Hz   |
| <b>recovery time after overload trip adjustable</b>   | 60 ... 1 800 s   |
| utilization category acc. to IEC 60947-4-2  | AC 53a   |
| <b>reference code acc. to IEC 81346-2</b>   | Q  |
| <b>Substance Prohibitance (Date)</b>  | 11.02.2019   |
| <b>product function</b>   |  |
| <ul style="list-style-type: none"> <li>• ramp-up (soft starting)</li> </ul>                       | Yes  |
| <ul style="list-style-type: none"> <li>• ramp-down (soft stop)</li> </ul>                         | Yes  |
| <ul style="list-style-type: none"> <li>• breakaway pulse</li> </ul>                               | Yes  |
| <ul style="list-style-type: none"> <li>• adjustable current limitation</li> </ul>                 | Yes  |
| <ul style="list-style-type: none"> <li>• creep speed in both directions of rotation</li> </ul>    | Yes  |
| <ul style="list-style-type: none"> <li>• pump ramp down</li> </ul>                                | Yes  |
| <ul style="list-style-type: none"> <li>• DC braking</li> </ul>                                    | Yes  |
| <ul style="list-style-type: none"> <li>• motor heating</li> </ul>                                 | Yes  |
| <ul style="list-style-type: none"> <li>• slave pointer function</li> </ul>                        | Yes  |
| <ul style="list-style-type: none"> <li>• trace function</li> </ul>                                | Yes  |
| <ul style="list-style-type: none"> <li>• intrinsic device protection</li> </ul>                   | Yes  |
| <ul style="list-style-type: none"> <li>• motor overload protection</li> </ul>                     | Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. |
| <ul style="list-style-type: none"> <li>• evaluation of thermistor motor protection</li> </ul>     | Yes; Type A PTC or Klixon / Thermoclick  |
| <ul style="list-style-type: none"> <li>• inside-delta circuit</li> </ul>                          | Yes  |
| <ul style="list-style-type: none"> <li>• auto-RESET</li> </ul>                                    | Yes  |
| <ul style="list-style-type: none"> <li>• manual RESET</li> </ul>                                  | Yes  |
| <ul style="list-style-type: none"> <li>• remote reset</li> </ul>                                  | Yes  |
| <ul style="list-style-type: none"> <li>• communication function</li> </ul>                        | Yes  |
| <ul style="list-style-type: none"> <li>• operating measured value display</li> </ul>              | Yes  |
| <ul style="list-style-type: none"> <li>• event list</li> </ul>                                    | Yes  |
| <ul style="list-style-type: none"> <li>• error logbook</li> </ul>                                 | Yes  |
| <ul style="list-style-type: none"> <li>• via software parameterizable</li> </ul>                  | Yes  |
| <ul style="list-style-type: none"> <li>• via software configurable</li> </ul>                     | Yes  |
| <ul style="list-style-type: none"> <li>• screw terminal</li> </ul>                                | Yes  |
| <ul style="list-style-type: none"> <li>• spring-loaded terminal</li> </ul>                        | No   |
| <ul style="list-style-type: none"> <li>• <b>PROFInergy</b></li> </ul>                             | Yes; in connection with the PROFINET Standard and PROFINET High-Feature communication modules  |
| <ul style="list-style-type: none"> <li>• <b>firmware update</b></li> </ul>                        | Yes  |
| <ul style="list-style-type: none"> <li>• <b>removable terminal for control circuit</b></li> </ul> | Yes  |
| <ul style="list-style-type: none"> <li>• voltage ramp</li> </ul>                                  | Yes  |
| <ul style="list-style-type: none"> <li>• torque control</li> </ul>                                | Yes  |
| <ul style="list-style-type: none"> <li>• combined braking</li> </ul>                              | Yes  |

|  |   |
|--|---|
| <ul style="list-style-type: none"> <li>• analog output</li> <li>• programmable control inputs/outputs</li> <li>• condition monitoring</li> <li>• automatic parameterisation</li> <li>• application wizards</li> <li>• alternative run-down</li> <li>• emergency operation mode</li> <li>• reversing operation</li> <li>• soft starting at heavy starting conditions</li> </ul> | Yes; 4 ... 20 mA (default) / 0 ... 10 V<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes |
| <b>Power Electronics</b>   |   |
| <b>operational current</b>   |   |
| <ul style="list-style-type: none"> <li>• at 40 °C rated value</li> <li>• at 40 °C rated value minimum</li> <li>• at 50 °C rated value</li> <li>• at 60 °C rated value</li> </ul>   | 1 280 A<br>256 A<br>1 139 A<br>1 030 A  |
| <b>operational current at inside-delta circuit</b>   |   |
| <ul style="list-style-type: none"> <li>• at 40 °C rated value</li> <li>• at 50 °C rated value</li> <li>• at 60 °C rated value</li> </ul>   | 2 217 A<br>1 973 A<br>1 784 A   |
| <b>operating voltage</b>   |   |
| <ul style="list-style-type: none"> <li>• rated value</li> <li>• at inside-delta circuit rated value</li> </ul>   | 200 ... 480 V<br>200 ... 480 V  |
| <b>relative negative tolerance of the operating voltage</b>  | -15 %   |
| <b>relative positive tolerance of the operating voltage</b>  | 10 %  |
| <b>relative negative tolerance of the operating voltage at inside-delta circuit</b>  | -15 %   |
| <b>relative positive tolerance of the operating voltage at inside-delta circuit</b>  | 10 %  |
| <b>operating power for 3-phase motors</b>  |   |
| <ul style="list-style-type: none"> <li>• at 230 V at 40 °C rated value</li> <li>• at 230 V at inside-delta circuit at 40 °C rated value</li> <li>• at 400 V at 40 °C rated value</li> <li>• at 400 V at inside-delta circuit at 40 °C rated value</li> </ul>   | 400 kW<br>710 kW<br>710 kW<br>1 200 kW  |
| <b>Operating frequency 1 rated value</b>   | 50 Hz   |
| <b>Operating frequency 2 rated value</b>   | 60 Hz   |
| <b>relative negative tolerance of the operating frequency</b>  | -10 %   |
| <b>relative positive tolerance of the operating frequency</b>  | 10 %  |
| <b>minimum load [%]</b>  | 10 %; Relative to set le  |
| <b>power loss [W] for rated value of the current at AC</b>   |   |
| <ul style="list-style-type: none"> <li>• at 40 °C after startup</li> <li>• at 50 °C after startup</li> <li>• at 60 °C after startup</li> </ul>   | 384 W<br>337 W<br>275 W   |
| <b>power loss [W] at AC at current limitation 350 %</b>  |   |
| <ul style="list-style-type: none"> <li>• at 40 °C during startup</li> <li>• at 50 °C during startup</li> <li>• at 60 °C during startup</li> </ul>  | 23 279 W<br>19 496 W<br>16 778 W  |
| <b>type of the motor protection</b>  | Electronic, tripping in the event of thermal overload of the motor                              |
| <b>Control circuit/ Control</b>  |   |
| <b>type of voltage of the control supply voltage</b>   | AC  |
| <b>control supply voltage at AC</b>  |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>   | 110 ... 250 V<br>110 ... 250 V  |
| <b>relative negative tolerance of the control supply voltage at AC at 50 Hz</b>  | -15 %   |
| <b>relative positive tolerance of the control supply voltage at AC at 50 Hz</b>  | 10 %  |
| <b>relative negative tolerance of the control supply voltage at AC at 60 Hz</b>  | -15 %   |
| <b>relative positive tolerance of the control supply voltage at AC at 60 Hz</b>  | 10 %  |
| <b>control supply voltage frequency</b>  | 50 ... 60 Hz  |

|   |  |
|---|--|
| <b>relative negative tolerance of the control supply voltage frequency</b>      | -10 %  |
| <b>relative positive tolerance of the control supply voltage frequency</b>      | 10 %   |
| <b>control supply current in standby mode rated value</b>                       | 100 mA   |
| <b>holding current in bypass operation rated value</b>                          | 210 mA   |
| <b>locked-rotor current at close of bypass contact maximum</b>                  | 1 A  |
| <b>inrush current peak at application of control supply voltage maximum</b>     | 44 A   |
| <b>duration of inrush current peak at application of control supply voltage</b> | 1.7 ms   |
| <b>design of the overvoltage protection</b>                                     | Varistor   |
| <b>design of short-circuit protection for control circuit</b>                   | 4 A gG fuse (I <sub>cu</sub> =1 kA), 6 A quick-acting fuse (I <sub>cu</sub> =1 kA), C1 miniature circuit breaker (I <sub>cu</sub> = 600 A), C6 miniature circuit breaker (I <sub>cu</sub> = 300 A); Is not part of scope of supply |
| <b>Inputs/ Outputs</b>  |  |
| <b>number of digital inputs</b>   | 4  |
| • parameterizable   | 4  |
| • <b>number of digital outputs</b>  | 4  |
| • number of digital outputs parameterizable                                     | 3  |
| • number of digital outputs not parameterizable                                 | 1  |
| <b>digital output version</b>   | 3 normally-open contacts (NO) / 1 changeover contact (CO)  |
| <b>number of analog outputs</b>   | 1  |
| <b>switching capacity current of the relay outputs</b>                          |  |
| • at AC-15 at 250 V rated value   | 3 A  |
| • at DC-13 at 24 V rated value  | 1 A  |
| <b>Installation/ mounting/ dimensions</b>                                       |  |
| <b>mounting position</b>  | Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)   |
| <b>fastening method</b>   | screw fixing   |
| <b>height</b>   | 764 mm   |
| <b>width</b>  | 478 mm   |
| <b>depth</b>  | 241 mm   |
| <b>required spacing with side-by-side mounting</b>                              |  |
| • forwards  | 10 mm  |
| • backwards   | 0 mm   |
| • upwards   | 100 mm   |
| • downwards   | 75 mm  |
| • at the side   | 5 mm   |
| <b>weight without packaging</b>   | 61 kg  |
| <b>Connections/ Terminals</b>   |  |
| <b>type of electrical connection</b>  |  |
| • for main current circuit  | busbar connection  |
| • for control circuit   | screw-type terminals   |
| <b>width of connection bar maximum</b>  | 55 mm  |
| <b>wire length for thermistor connection</b>                                    |  |
| • with conductor cross-section = 0.5 mm <sup>2</sup> maximum                    | 50 m   |
| • with conductor cross-section = 1.5 mm <sup>2</sup> maximum                    | 150 m  |
| • with conductor cross-section = 2.5 mm <sup>2</sup> maximum                    | 250 m  |
| <b>type of connectable conductor cross-sections</b>                             |  |
| • for DIN cable lug for main contacts stranded                                  | 2x (50 ... 240 mm <sup>2</sup> )   |
| • for DIN cable lug for main contacts finely stranded                           | 2x (70 ... 240 mm <sup>2</sup> )   |
| <b>type of connectable conductor cross-sections</b>                             |  |
| • for control circuit solid   | 1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )   |
| • for control circuit finely stranded with core end processing                  | 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )   |
| • at AWG cables for control circuit solid                                       | 1x (20 ... 12), 2x (20 ... 14)   |
| <b>wire length</b>  |  |
| • between soft starter and motor maximum  | 800 m  |
| • at the digital inputs at DC maximum   | 1 000 m  |
| <b>tightening torque</b>  |  |

|  |  |
|--|--|
| <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> <li>• for auxiliary and control contacts with screw-type terminals</li> </ul>  | <p>20 ... 35 N·m</p> <p>0.8 ... 1.2 N·m</p>  |
| <b>tightening torque [lbf·in]</b> <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> <li>• for auxiliary and control contacts with screw-type terminals</li> </ul>  | <p>177 ... 310 lbf·in</p> <p>7 ... 10.3 lbf·in</p>   |
| <b>Ambient conditions</b>  |  |
| installation altitude at height above sea level maximum  | 5 000 m; Derating as of 1000 m, see catalog  |
| <b>ambient temperature</b> <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage and transport</li> </ul>  | <p>-25 ... +60 °C; Please observe derating at temperatures of 40 °C or above</p> <p>-40 ... +80 °C</p>   |
| <b>environmental category</b> <ul style="list-style-type: none"> <li>• during operation acc. to IEC 60721</li> <li>• during storage acc. to IEC 60721</li> <li>• during transport acc. to IEC 60721</li> </ul>   | <p>3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6</p> <p>1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4</p> <p>2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)</p> |
| <b>EMC emitted interference</b>  | acc. to IEC 60947-4-2: Class A   |
| <b>Communication/ Protocol</b>   |  |
| <b>communication module is supported</b> <ul style="list-style-type: none"> <li>• PROFINET standard</li> <li>• PROFINET high-feature</li> <li>• EtherNet/IP</li> <li>• Modbus RTU</li> <li>• Modbus TCP</li> <li>• PROFIBUS</li> </ul>   | <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p>  |
| <b>UL/CSA ratings</b>  |  |
| <b>manufacturer's article number</b> <ul style="list-style-type: none"> <li>• of the fuse <ul style="list-style-type: none"> <li>— usable for Standard Faults up to 575/600 V according to UL</li> <li>— usable for High Faults up to 575/600 V according to UL</li> <li>— usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL</li> <li>— usable for High Faults at inside-delta circuit up to 575/600 V according to UL</li> </ul> </li> </ul> | <p>Type: Class J / L, max. 3000 A; Iq = 85 kA</p> <p>Type: Class J / L, max. 3000 A; Iq = 100 kA</p> <p>Type: Class J / L, max. 3000 A; Iq = 85 kA</p> <p>Type: Class J / L, max. 3000 A; Iq = 100 kA</p>  |
| <b>operating power [hp] for 3-phase motors</b> <ul style="list-style-type: none"> <li>• at 200/208 V at 50 °C rated value</li> <li>• at 220/230 V at 50 °C rated value</li> <li>• at 460/480 V at 50 °C rated value</li> <li>• at 200/208 V at inside-delta circuit at 50 °C rated value</li> <li>• at 220/230 V at inside-delta circuit at 50 °C rated value</li> <li>• at 460/480 V at inside-delta circuit at 50 °C rated value</li> </ul>                                  | <p>400 hp</p> <p>450 hp</p> <p>1 000 hp</p> <p>700 hp</p> <p>850 hp</p> <p>1 700 hp</p>  |
| <b>contact rating of auxiliary contacts according to UL</b>  | R300-B300  |
| <b>Safety related data</b>   |  |
| <b>protection class IP on the front acc. to IEC 60529</b>  | IP00   |
| <b>electromagnetic compatibility</b>   | acc. to IEC 60947-4-2  |
| <b>ATEX</b>  |  |
| <b>certificate of suitability</b> <ul style="list-style-type: none"> <li>• ATEX</li> <li>• IECEX</li> <li>• according to ATEX directive 2014/34/EU</li> </ul>  | <p>Yes</p> <p>Yes</p> <p>BVS 18 ATEX F 003 X</p>   |
| <b>type of protection according to ATEX directive 2014/34/EU</b>   | II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]   |
| <b>hardware fault tolerance acc. to IEC 61508 relating to ATEX</b>   | 0  |
| <b>PFDAvg with low demand rate acc. to IEC 61508</b>   | 0.008  |

|   |               |
|---|---------------|
| relating to ATEX  |               |
| PFHD with high demand rate acc. to EN 62061 relating to ATEX                        | 0.0000005 1/h |
| Safety Integrity Level (SIL) acc. to IEC 61508 relating to ATEX                     | SIL1          |
| T1 value for proof test interval or service life acc. to IEC 61508 relating to ATEX | 3 y           |

#### Certificates/ approvals

|                          |     |                                |
|--------------------------|-----|--------------------------------|
| General Product Approval | EMC | For use in hazardous locations |
|--------------------------|-----|--------------------------------|



|                                |                           |                   |                   |
|--------------------------------|---------------------------|-------------------|-------------------|
| For use in hazardous locations | Declaration of Conformity | Test Certificates | Marine / Shipping |
|--------------------------------|---------------------------|-------------------|-------------------|



[Type Test Certificates/Test Report](#)



|                   |       |
|-------------------|-------|
| Marine / Shipping | other |
|-------------------|-------|



[Confirmation](#)

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3RW5558-6HA14>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RW5558-6HA14>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5558-6HA14>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mfb=3RW5558-6HA14&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RW5558-6HA14&lang=en)

Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current




<https://support.industry.siemens.com/cs/ww/en/ps/3RW5558-6HA14/char>

Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mfb=3RW5558-6HA14&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

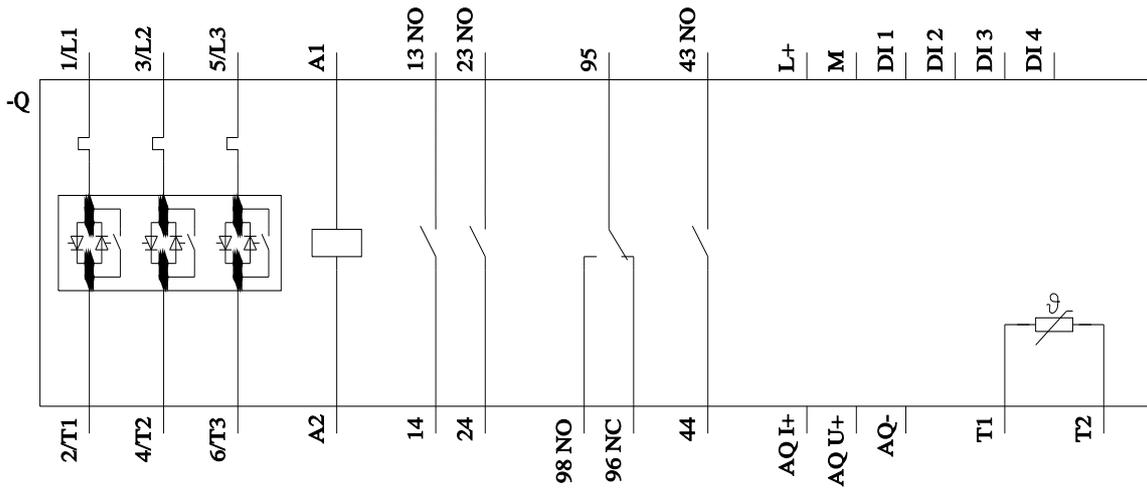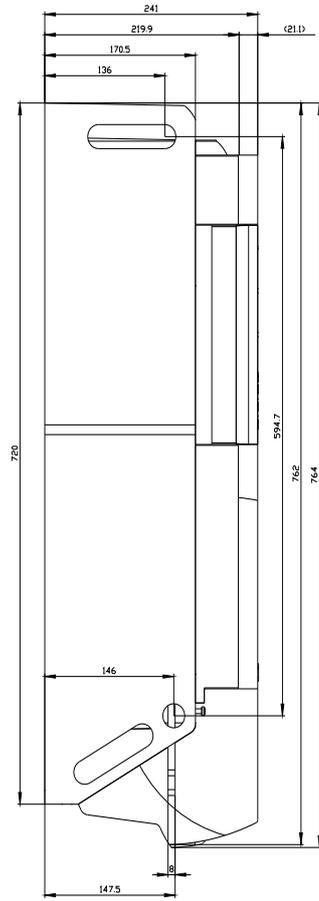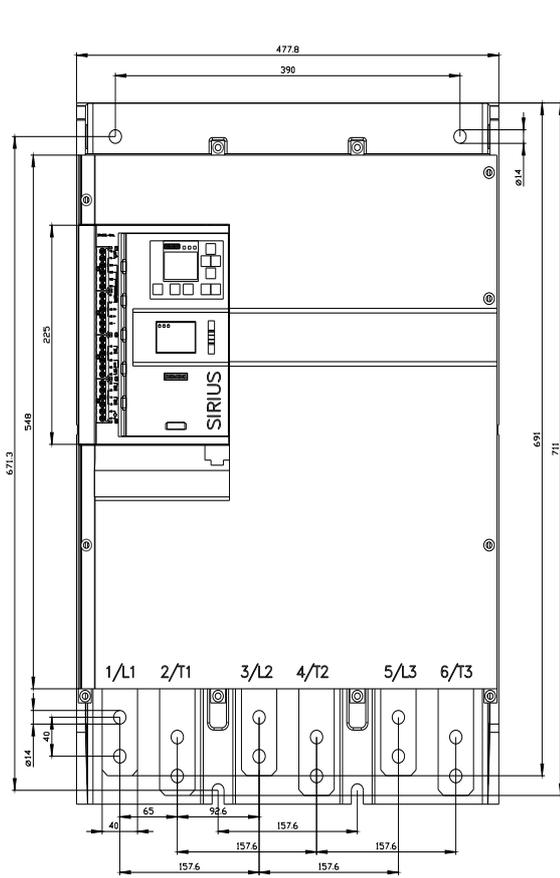



last modified:

3/9/2021 