


SERIES ELEMENT,
FOR CONNECTION OF A 48V LAMP

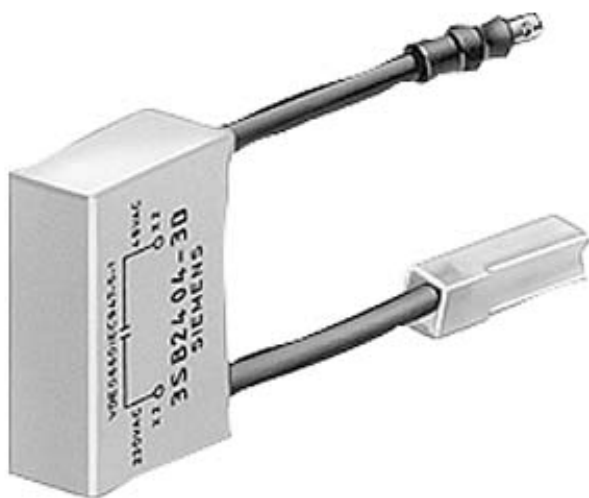

Contact block/ lampholder:

Product designation		voltage reducer for lamps
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0
Number of changeover contacts / for auxiliary contacts		0
Product function / positive opening		No
Design of the electrical connection		support terminals

General technical data:

Type of / input voltage		AC/DC
Input voltage / 1 / of the lamp transformer / rated value	V	230
Output voltage / 1 / of the lamp transformer / rated value	V	48
Resistance against shock / for devices with incandescent lamp / according to IEC 60068-2-27		<= 30g
Resistance against vibration / according to IEC 60068-2-6		20 ... 200 Hz: 5g
Reference code / according to DIN EN 61346-2		C
Reference code / according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		A
Ambient temperature		
• during operating	°C	-25 ... +70
• during storage	°C	-40 ... +80

Protection class IP / of the terminal		IP20
protection type IP / of the enclosure		IP40
Mounting type		clip-on
Width	mm	10
Height	mm	26
Depth	mm	70

Certificates/ approvals:

General Product Approval	Declaration of Conformity	other
--------------------------	---------------------------	-------



[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator

<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SB2404-3D/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SB2404-3D

last change:

Jun 16, 2014