



22MM PLASTIC ROUND ACTUATOR: EMERGEN.-STOP MUSHR.PUSHB. 60MM LATCH.W. ROT.-TO-UNLATCH MECH. WITH HOLDER RED

**Actuator:**

<b>Design of the product</b>		Single device round with positive latching in accordance with ISO 13850
<b>Design of the operating mechanism</b>		Emergency stop mushroom pushbutton
<b>Functionality / of the actuator</b>		Latching
<b>Type of unlocking device</b>		rotate-to-unlatch mechanism
<b>Color / of the activation element</b>		Red
<b>Material / of the activation element</b>		plastic
<b>Number of switching positions</b>		2
<b>Product component / front ring</b>		No
<b>Product function / EMERGENCY STOP function</b>		Yes

**Holder:**

<b>Material / of the holder</b>		Plastic
---------------------------------	--	---------

**General technical data:**

<b>Resistance against shock</b>		<= 50g
<ul style="list-style-type: none"> <li>for devices without incandescent lamp / according to IEC 60068-2-27</li> </ul>		
<b>Resistance against vibration / according to IEC 60068-2-6</b>		20 ... 200 Hz: 5g
<b>Operating cycles / maximum</b>	1/h	1,000
<b>Mechanical operating cycles as operating time / typical</b>		300,000

<b>Reference code</b>		
• according to DIN EN 61346-2		S
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		S
<b>Tightening torque / of the screws in the bracket / maximum</b>	N-m	1
<b>Ambient temperature</b>		
• during operating	°C	-25 ... +70
• during storage	°C	-40 ... +80
<b>Protection class IP</b>		IP66
<b>B10 value / with high demand rate / according to SN 31920</b>		100,000
<b>Proportion of dangerous failures / with high demand rate / according to SN 31920</b>	%	20
<b>Proportion of dangerous failures / with low demand rate / according to SN 31920</b>	%	20
<b>Failure rate [FIT] / with low demand rate / according to SN 31920</b>	FIT	100
<b>T1 value / for proof test interval or service life / according to IEC 61508</b>	a	20
<b>climatic class / during the operating phase / according to EN 60721</b>		3K6
<b>Mounting type</b>		front mounting
<b>Shape / of the installation hole</b>		round
<b>Installation width</b>	mm	60
<b>Mounting diameter</b>	mm	22
<b>Mounting height</b>	mm	49
<b>Mounting depth</b>	mm	29

#### Certificates/ approvals:

##### General Product Approval



[Special Test Certificate](#)

EG-Konf.

##### Shipping Approval



##### other

[Confirmation](#)


[other](#)

[Environmental Confirmations](#)

#### Further information:

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

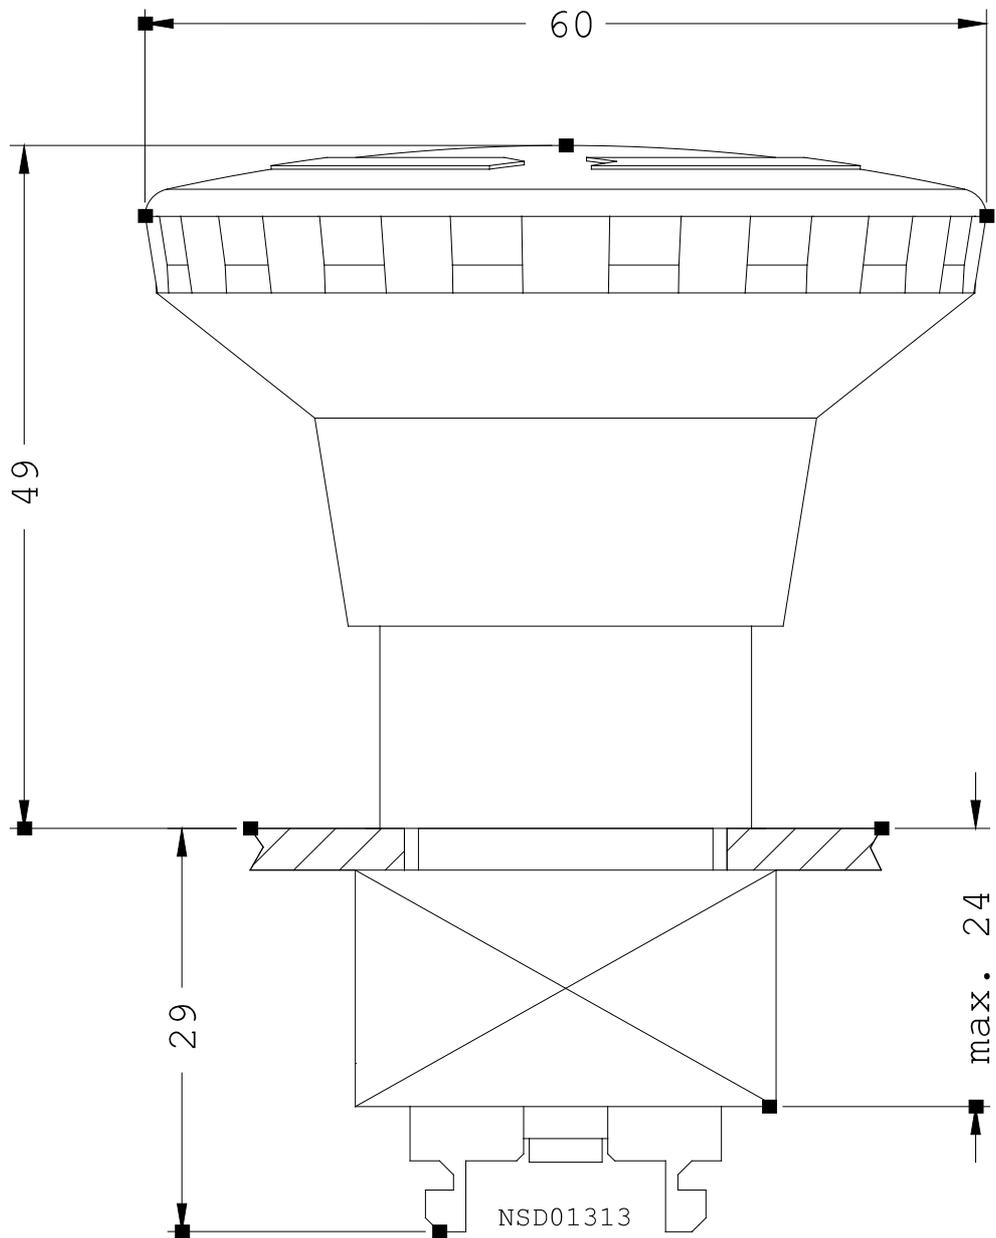

last change:

Jun 16, 2014