



22MM PLASTIC ROUND ACTUATOR: OMR KEY-
OPER.SWITCH W. 2 KEYS 2 SWITCH POSITIONS O-I
MOMENTARY CONTACT TYPE LOCK NO 73037,
REMOVAL POS. O WITH HOLDER RED

Actuator:

Design of the product		Single device round
Design of the operating mechanism		Key-operated switch
Functionality / of the actuator		Momentary contact type
Type of unlocking device		key unlatching
Color / of the activation element		Red
Material / of the activation element		plastic
Make of the lock		O.M.R.
Number of switching positions		2
Switch position for key distraction		O
Actuating angle		
• clockwise	°	50
Product component / front ring		Yes
Material / of the front ring		plastic
Color / of the front ring		black
Design of the front ring		Standard
Product function / EMERGENCY STOP function		No

Holder:

Material / of the holder		Plastic
--------------------------	--	---------

General technical data:

Resistance against shock		
• for devices without incandescent lamp / according to IEC 60068-2-27		<= 50g
Resistance against vibration / according to IEC 60068-2-6		20 ... 200 Hz: 5g
Operating cycles / maximum	1/h	1,000
Mechanical operating cycles as operating time / typical		300,000
Reference code		
• according to DIN EN 61346-2		S
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		S
Tightening torque / of the screws in the bracket / maximum	N·m	1
Ambient temperature		
• during operating	°C	-25 ... +70
• during storage	°C	-40 ... +80
Protection class IP		IP66
climatic class / during the operating phase / according to EN 60721		3K6
Mounting type		front mounting
Shape / of the installation hole		round
Installation width	mm	28.5
Mounting diameter	mm	22
Mounting height	mm	64
Mounting depth	mm	29

Certificates/ approvals:

General Product Approval



[Special Test Certificate](#)

Shipping Approval



other

[Confirmation](#)


[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

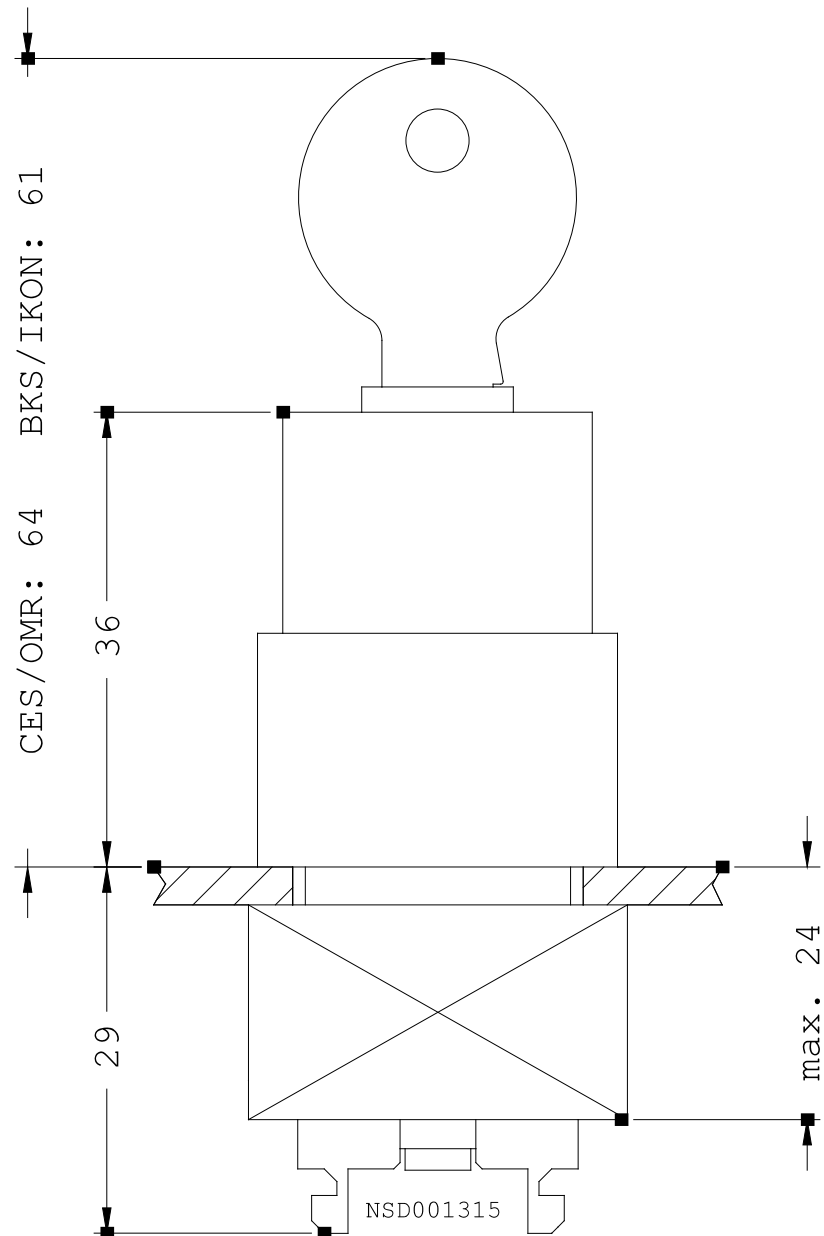

last change:

Jun 16, 2014