



22MM PLASTIC ROUND ACTUATOR: BKS KEY-
OPER.SWITCH WITH 2 KEYS 2 SWITCH POSITIONS O-I
MOMENTARY CONTACT TYPE LOCK NO S1,
REMOVAL POS. O WITH HOLDER

Actuator:		
Design of the product		Single device round
Design of the operating mechanism		Key-operated switch
Functionality / of the actuator		Momentary contact type
Type of unlocking device		key unlatching
Color / of the activation element		Silver
Material / of the activation element		metal
Make of the lock		BCS
Number of switching positions		2
Switch position for key distraction		O
Actuating angle		
• clockwise	°	50
Product component / front ring		Yes
Material / of the front ring		plastic
Color / of the front ring		black
Design of the front ring		Standard
Product function / EMERGENCY STOP function		No
Holder:		
Material / of the holder		Plastic

General technical data:

Resistance against shock

- for devices without incandescent lamp / according to IEC 60068-2-27

≤ 50g

Resistance against vibration / according to IEC 60068-2-6

20 ... 200 Hz: 5g

Operating cycles / maximum

1/h

1,000

Mechanical operating cycles as operating time / typical

300,000

Reference code

- according to DIN EN 61346-2
- according to DIN 40719 extended according to IEC 204-2 / according to IEC 750

S

S

Tightening torque / of the screws in the bracket / maximum

N·m

1

Ambient temperature

- during operating
- during storage

°C

-25 ... +70

°C

-40 ... +80

Protection class IP

IP66

climatic class / during the operating phase / according to EN 60721

3K6

Mounting type

front mounting

Shape / of the installation hole

round

Installation width

mm

28.5

Mounting diameter

mm

22

Mounting height

mm

61

Mounting depth

mm

29

Certificates/ approvals:

General Product Approval

Declaration of Conformity

Test Certificates



[Special Test Certificate](#)

Shipping Approval



other

[Confirmation](#)


[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

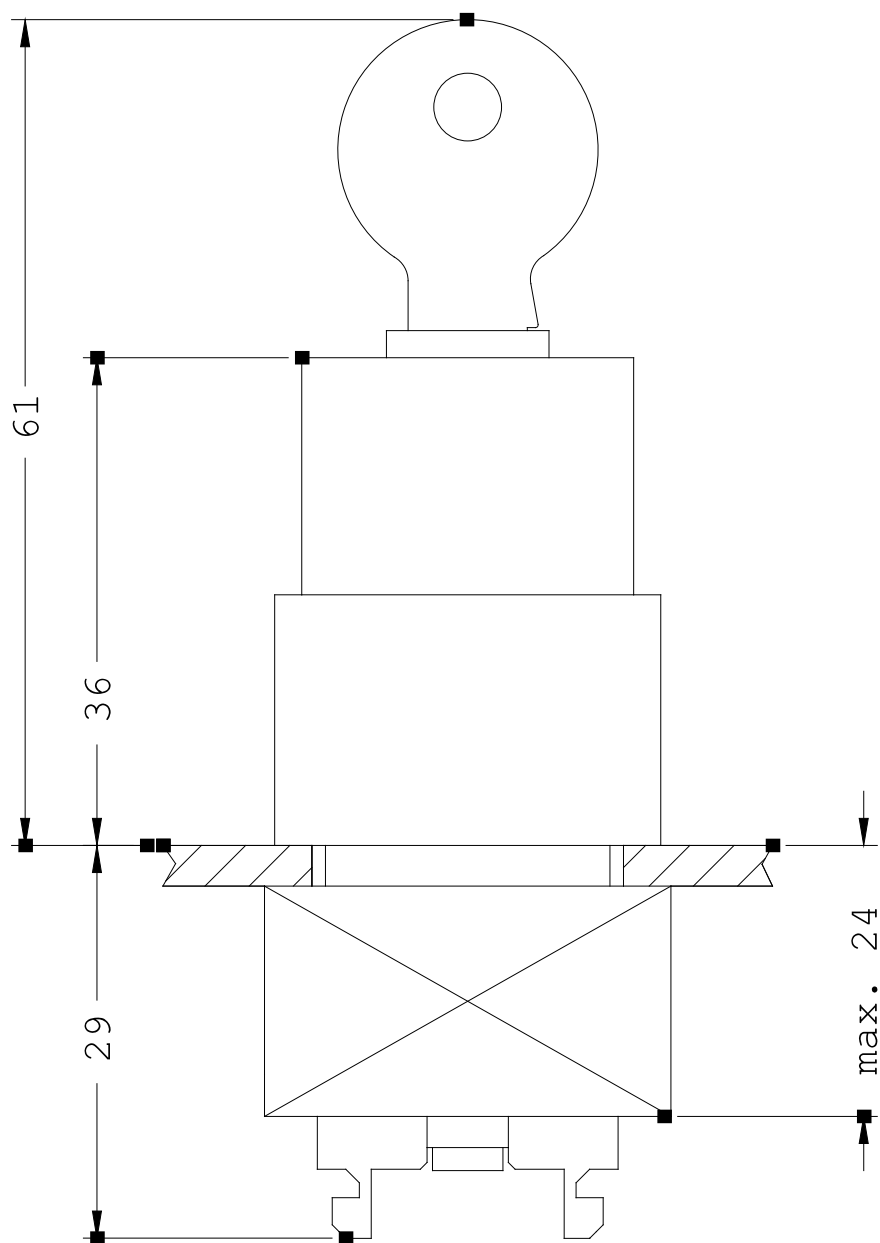

last change:

Jun 16, 2014