SIEMENS

Product data sheet 3SB3001-2KA51

22MM PLASTIC ROUND ACTUATOR: SELECTOR SWITCH LATCHING 2 SWITCH POSITIONS O-I ILLUMINATED INCL. HOLDER FOR 3 ELEMENTS WITH HOLDER BLUE

Actuator:		
	Single device round	
	selector switch	
	Latching	
	rotate-to-unlatch mechanism	
	Blue	
	plastic	
	2	
0	50	
	Yes	
	plastic	
	black	
	Standard	
	No	
Holder:		
	Plastic	
	<= 50g	
	<= 50g 20 200 Hz: 5g	
1/h	· ·	
1/h	20 200 Hz: 5g	
1/h	20 200 Hz: 5g 1,000	
1/h	20 200 Hz: 5g 1,000	
1/h	20 200 Hz: 5g 1,000 300,000	
1/h N·m	20 200 Hz: 5g 1,000 300,000	
	20 200 Hz: 5g 1,000 300,000 S S	
	0	

during storage	°C	-40 +80
Protection class IP		IP66
climatic class / during the operating phase / according to EN 60721		3K6
Mounting type		front mounting
Shape / of the installation hole		round
Installation width	mm	28.5
Mounting diameter	mm	22
Mounting height	mm	24
Mounting depth	mm	29

Certificates/ approvals:

General Product Approval

Declaration of Conformity

Test Certificates









Special Test Certificate

Shipping Approval











other

Confirmation

other

Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

 $\underline{\text{http://www.siemens.com/industrial-controls/catalogs}}$

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

Cax online generator


http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3SB3001-2KA51/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

 $\underline{\text{http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SB3001-2KA51}}$

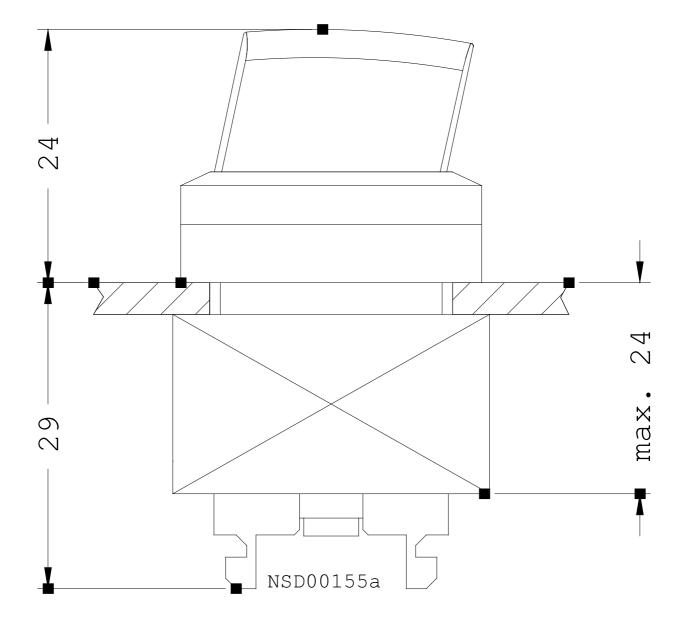

last change: Jun 16, 2014