SIEMENS

Product data sheet   **3SB3110-0AA33**

26X26MM PLASTIC SQUARE ACTUATOR: PUSHBUTTON
W.RAISED FRONT RING,
CASTELLA. WITH HOLDER YELLOW

Actuato/ signaling device:

Design of the product	Single device square
Design of the operating mechanism	Pushbutton
Functionality / of the actuator	Momentary contact type
Type of unlocking device	without
Color / of the activation element	Yellow
Material / of the activation element	plastic
Shape / of the activation element	Flat pushbutton
Number of switching positions	2
Product component / front ring	Yes
Material / of the front ring	plastic
Color / of the front ring	black
Design of the front ring	High front ring with castellation, 13 mm
Product function / EMERGENCY STOP function	No

Holder:

Material / of the holder	Plastic

General technical details:

Resistance against shock	

• for devices without incandescent lamp / according to IEC 60068-2-27			<= 50g
Resistance against vibration / according to IEC 60068-2-6			20 ... 200 Hz: 5g
Operating cycles / maximum		1/h	1,000
Mechanical operating cycles as operating time / typical			10,000,000
Reference code			
• according to DIN EN 61346-2			S
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750			S
Tightening torque / of the screws in the bracket / maximum		N·m	1
Ambient temperature			
• during operating		°C	-25 … +70
• during storage		°C	-40 … +80
Protection class IP			IP66
climatic class / during the operating phase / according to EN 60721			3K6
Mounting type			front mounting
Shape / of the installation hole			square
Installation width		mm	30
Mounting height		mm	13
Mounting depth		mm	29

Certificates/ approvals:

General Product Approval			Declaration of Conformity	Test Certificates
CSA	EAC	UL	CE EG-Konf.	Special Test Certificate

Shipping Approval

ABS	DNV	Lloyd's Register LRS	PRS	RINA

other

Confirmation other Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,…)
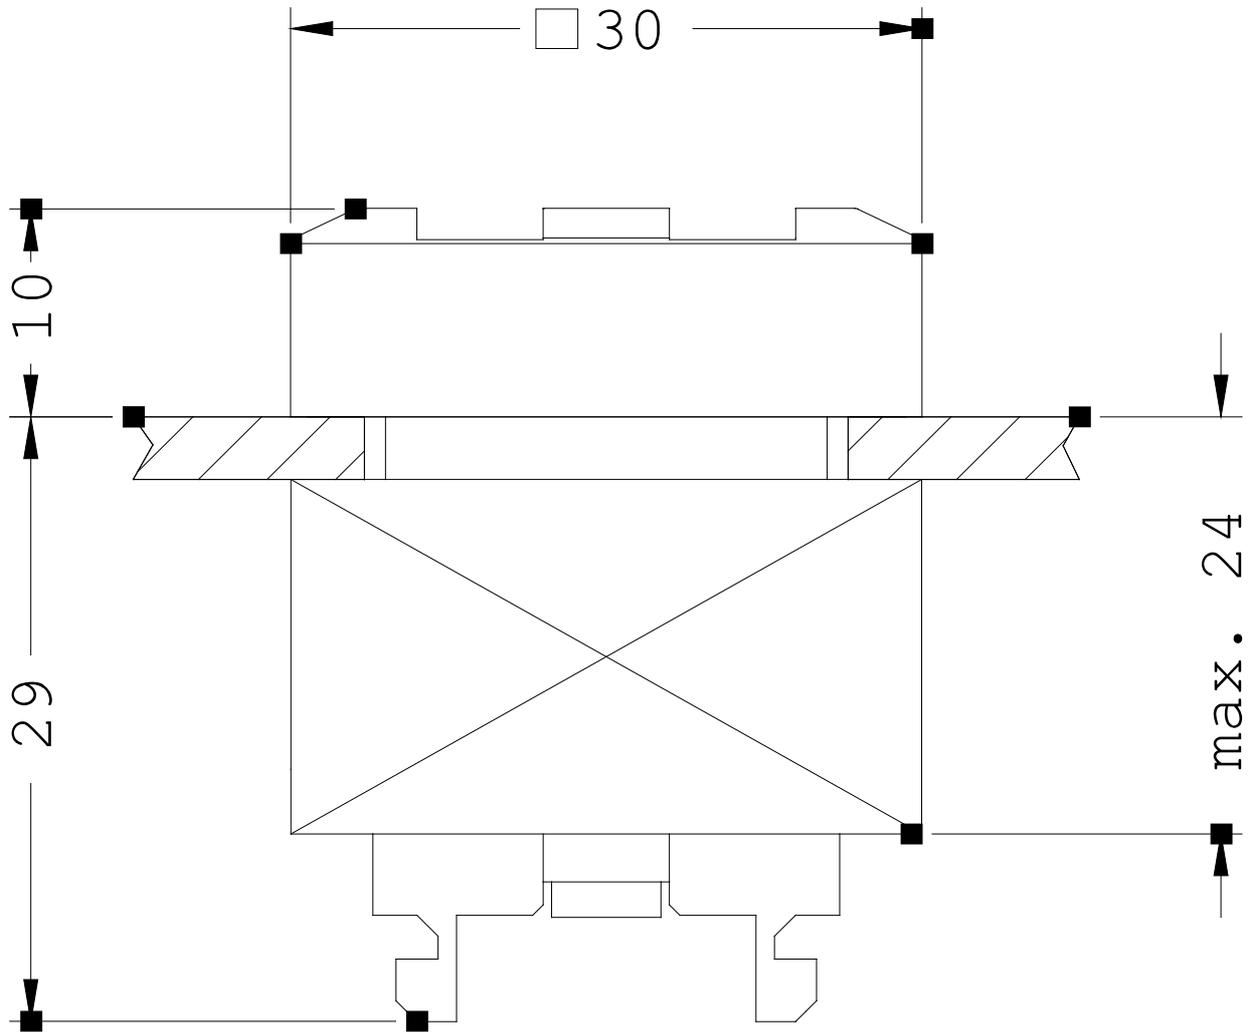http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)
http://www.siemens.com/industrial-controls/mall

Cax online generator
http://www.siemens.com/cax

☐ 30

10

29

max. 24

last change: Jul 7, 2014