


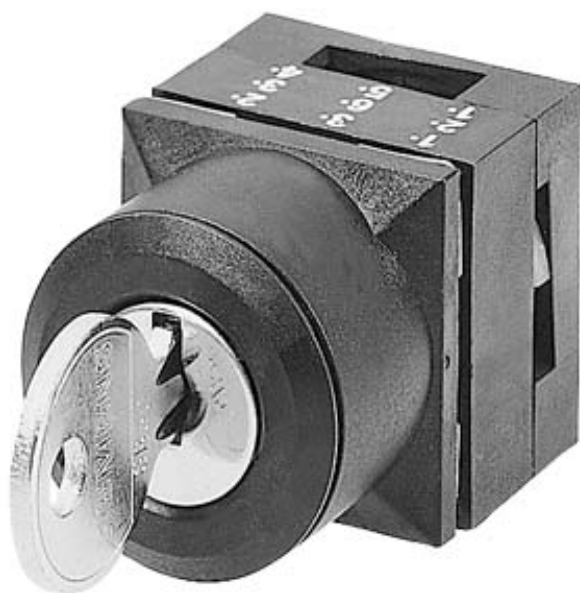

26X26MM SQUARE PLASTIC ACTUATOR: RONIS LOCK WITH 2 KEYS ON THE LEFT MAINTAINED CONTACT, ON THE RIGHT MOMENTARY CONTACT 3 SWITCH POSITIONS I-O-II LOCK NUMBER SB30, REMOVE O WITH HOLDER POSSIBLE SPECIAL LOCKS FOR RONIS KEYSWITCHES: SB31, 455, 421

### Actuato/ signaling device:

|                                            |   |                                            |
|--------------------------------------------|---|--------------------------------------------|
| Design of the product                      |   | Single device square                       |
| Design of the operating mechanism          |   | Key-operated switch                        |
| Functionality / of the actuator            |   | Latching (left), momentary contact (right) |
| Type of unlocking device                   |   | key unlatching                             |
| Color / of the activation element          |   | Silver                                     |
| Material / of the activation element       |   | metal                                      |
| Make of the lock                           |   | RONIS                                      |
| Number of switching positions              |   | 3                                          |
| Switch position for key distraction        |   | O                                          |
| Actuating angle                            |   |                                            |
| • clockwise                                | ° | 50                                         |
| • anticlockwise                            | ° | 50                                         |
| Product component / front ring             |   | Yes                                        |
| Material / of the front ring               |   | plastic                                    |
| Color / of the front ring                  |   | black                                      |
| Design of the front ring                   |   | Standard                                   |
| Product function / EMERGENCY STOP function |   | No                                         |

### Holder:

|                                                                                                                                           |          |                            |
|-------------------------------------------------------------------------------------------------------------------------------------------|----------|----------------------------|
| <b>Material / of the holder</b>                                                                                                           |          | Plastic                    |
| <b>General technical details:</b>                                                                                                         |          |                            |
| <b>Resistance against shock</b><br>• for devices without incandescent lamp / according to IEC 60068-2-27                                  |          | <= 50g                     |
| <b>Resistance against vibration / according to IEC 60068-2-6</b>                                                                          |          | 20 ... 200 Hz: 5g          |
| <b>Operating cycles / maximum</b>                                                                                                         | 1/h      | 1,000                      |
| <b>Mechanical operating cycles as operating time / typical</b>                                                                            |          | 300,000                    |
| <b>Reference code</b><br>• according to DIN EN 61346-2<br>• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 |          | S<br>S                     |
| <b>Tightening torque / of the screws in the bracket / maximum</b>                                                                         | N·m      | 1                          |
| <b>Ambient temperature</b><br>• during operating<br>• during storage                                                                      | °C<br>°C | -25 ... +70<br>-40 ... +80 |
| <b>Protection class IP</b>                                                                                                                |          | IP66                       |
| <b>climatic class / during the operating phase / according to EN 60721</b>                                                                |          | 3K6                        |
| <b>Mounting type</b>                                                                                                                      |          | front mounting             |
| <b>Shape / of the installation hole</b>                                                                                                   |          | square                     |
| <b>Installation width</b>                                                                                                                 | mm       | 30                         |
| <b>Mounting height</b>                                                                                                                    | mm       | 44                         |
| <b>Mounting depth</b>                                                                                                                     | mm       | 29                         |

#### Certificates/ approvals:

##### General Product Approval



EG-Konf.

[Special Test Certificate](#)

##### Shipping Approval



##### other

[Confirmation](#)


[other](#)

[Environmental Confirmations](#)

#### Further information:

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

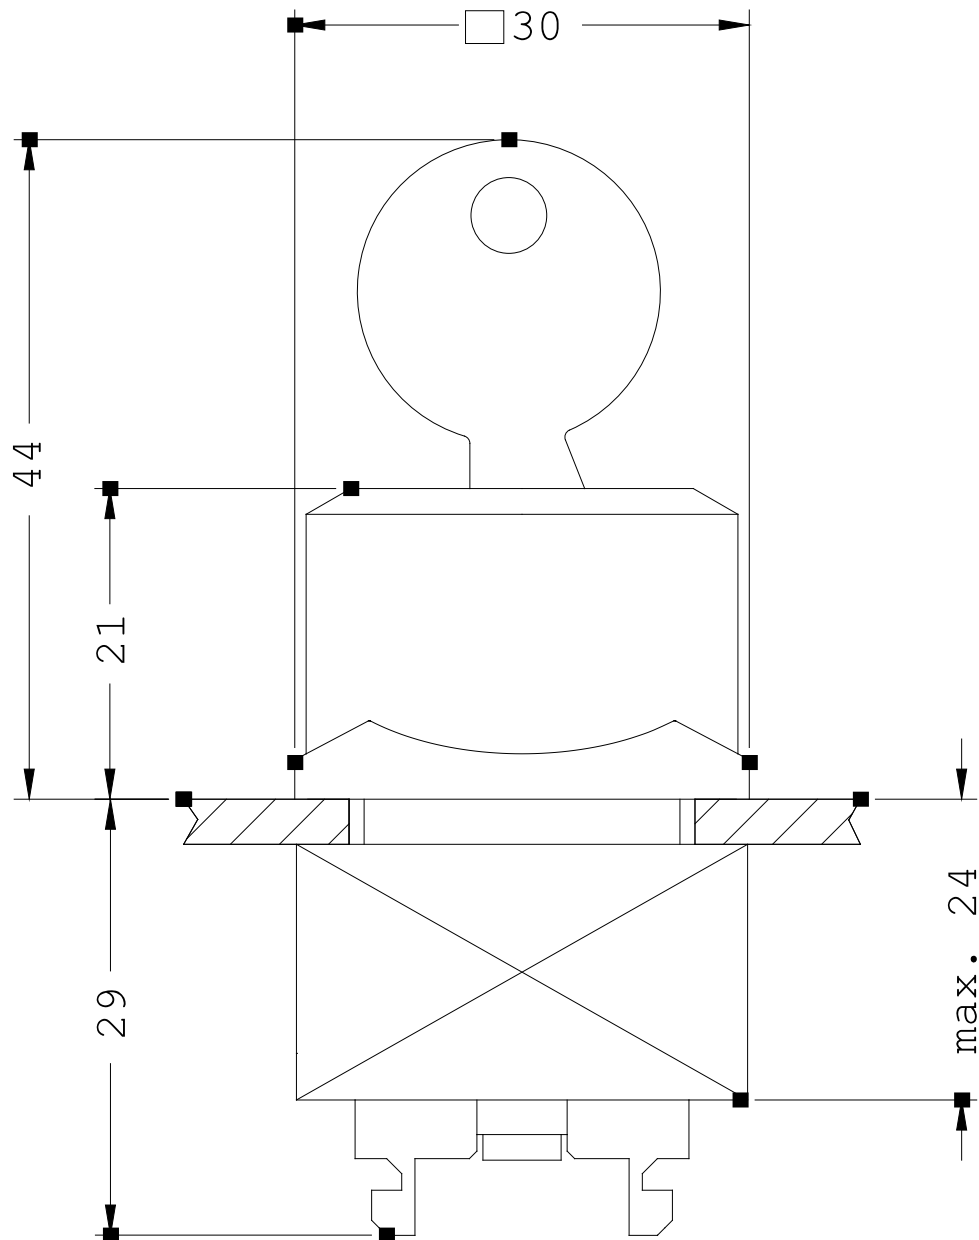

last change:

Jul 7, 2014