# **SIEMENS**

Product data sheet 3SB3110-4PD01

26X26MM PLASTIC SQUARE ACTUATOR: CES KEY-OPER.SWITCH WITH 2 KEYS LATCHING 3 SWITCH POSITIONS I-O-II LOCK NO SSG 10, REMOVAL POS. O WITH HOLDER

Actuato/ signaling device:		
Design of the product		Single device square
Design of the operating mechanism		Key-operated switch
Functionality / of the actuator		Latching
Type of unlocking device		key unlatching
Color / of the activation element		Silver
Material / of the activation element		metal
Make of the lock		CES
Number of switching positions		3
Switch position for key distraction		0
Actuating angle		
• clockwise	o	50
anticlockwise	o	50
Product component / front ring		Yes
Material / of the front ring		plastic
Color / of the front ring		black
Design of the front ring		Standard
Product function / EMERGENCY STOP function		No
Holder:		
Material / of the holder		Plastic
General technical details:		
Resistance against shock		
<ul> <li>for devices without incandescent lamp / according to IEC 60068- 2-27</li> </ul>		<= 50g
Resistance against vibration / according to IEC 60068-2-6		20 200 Hz: 5g
Operating cycles / maximum	1/h	1,000
Mechanical operating cycles as operating time / typical		300,000
Reference code		
according to DIN EN 61346-2		S
<ul> <li>according to DIN 40719 extended according to IEC 204-2 / according to IEC 750</li> </ul>		S

Tightening torque / of the screws in the bracket / maximum	N∙m	1
Ambient temperature		
during operating	°C	-25 +70
during storage	°C	-40 <b>+</b> 80
Protection class IP		IP66
B10 value / with high demand rate / according to SN 31920		50,000
Proportion of dangerous failures / with high demand rate / according to SN 31920	%	20
Proportion of dangerous failures / with low demand rate / according to SN 31920	%	20
Failure rate [FIT] / with low demand rate / according to SN 31920	FIT	100
T1 value / for proof test interval or service life / according to IEC 61508	а	20
climatic class / during the operating phase / according to EN 60721		3K6
Mounting type		front mounting
Shape / of the installation hole		square
Installation width	mm	30
Mounting height	mm	64
Mounting depth	mm	29

## Certificates/ approvals:

**General Product Approval** 

Declaration of Conformity

**Test Certificates** 









Special Test Certificate

### Shipping Approval











#### other

Confirmation

other

Environmental Confirmations

#### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)


http://www.siemens.com/industrial-controls/mall

Cax online generator

http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3SB3110-4PD01/all

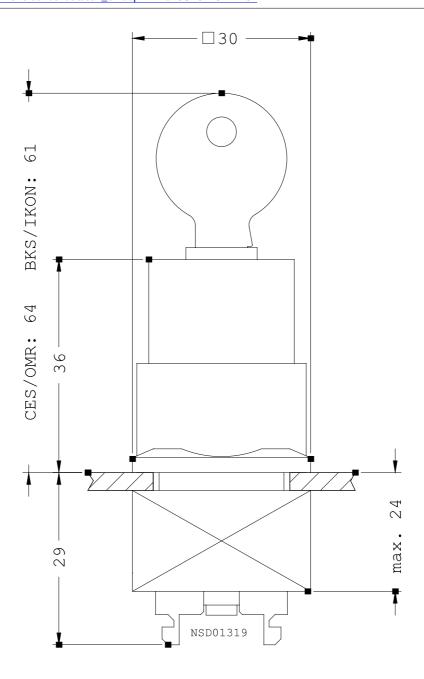

last change: Jul 7, 2014