SIEMENS

Product data sheet 3SB3111-2DA51



26X26MM PLASTIC SQUARE ACTUATOR: TOGGLE CATCHING 3 SWITCH POSITIONS I-O-II ILLUMINATED WITH HOLDER BLUE

| Actuato/ signaling device: | | | | |
|--|---|-----------------------------|--|--|
| Design of the product | | Single device square | | |
| Design of the operating mechanism | | selector switch | | |
| Functionality / of the actuator | | Latching | | |
| Type of unlocking device | | rotate-to-unlatch mechanism | | |
| Color / of the activation element | | Blue | | |
| Material / of the activation element | | plastic | | |
| Number of switching positions | | 3 | | |
| Actuating angle | | | | |
| • clockwise | 0 | 50 | | |
| anticlockwise | o | 50 | | |
| Product component / front ring | | Yes | | |
| Material / of the front ring | | plastic | | |
| Color / of the front ring | | black | | |
| Design of the front ring | | Standard | | |
| Product function / EMERGENCY STOP function | | No | | |

| Holder: | |
|--------------------------|---------|
| Material / of the holder | Plastic |
| Material / of the holder | Plastic |

General technical details:

| Resistance against shock | | |
|---|-----|----------------|
| for devices with incandescent lamp / according to IEC 60068-2- 27 | | <= 30g |
| • for devices without incandescent lamp / according to IEC 60068-2-27 | | <= 50g |
| Resistance against vibration / according to IEC 60068-2-6 | | 20 200 Hz: 5g |
| Operating cycles / maximum | 1/h | 1,000 |
| Mechanical operating cycles as operating time / typical | | 300,000 |
| Reference code | | |
| according to DIN EN 61346-2 | | S |
| according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 | | S |
| Tightening torque / of the screws in the bracket / maximum | N⋅m | 1 |
| Ambient temperature | | |
| during operating | °C | -25 +70 |
| during storage | °C | -40 +80 |
| Protection class IP | | IP66 |
| climatic class / during the operating phase / according to EN 60721 | | 3K6 |
| Mounting type | | front mounting |
| Shape / of the installation hole | | square |
| Installation width | mm | 30 |
| Mounting height | mm | 24 |
| Mounting depth | mm | 29 |
| | | |

Certificates/ approvals:

General Product Approval

Declaration of Conformity

Test Certificates









Special Test Certificate

Shipping Approval











other

Confirmation

other

Environmental Confirmations

Further information:

Information- and Download center (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

Cax online generator


http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3SB3111-2DA51/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SB3111-2DA51

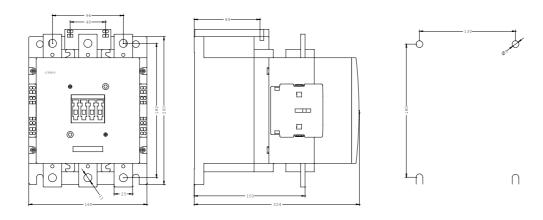

last change: Jul 7, 2014