


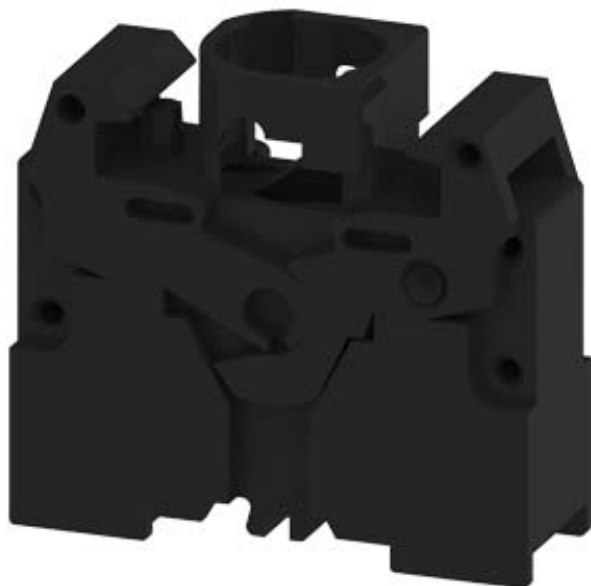

ACTUATOR-/INDICATOR COMPONENT WITH
INTEGRATED VOLTAGE REDUCER LAMP HOLDER BA
9S WITH LAMP 130V,
3SX1731 SPRING-LOADED TERMINAL RATED VOLTAGE
230/240V AC CLEAR

Contact block/ lampholder:

Product designation		lampholder
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0
Number of changeover contacts / for auxiliary contacts		0
Product function / positive opening		No
Number of lampholders		1
Execution of the mounting		BA 9s
Design of the electrical connection		spring-loaded terminals

General technical data:

Degree of pollution		class 3
Type of voltage / of the supply voltage / of light source		AC
Supply voltage / 1 / of the fluorescent material		
• at 60 Hz / for AC / rated value	V	130
• at 50 Hz / for AC / rated value	V	130
Voltage type / of operating voltage		AC/DC
Reference code		
• according to DIN EN 61346-2		P
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		H

Ambient temperature • during operating • during storage	°C	-25 ... +60
	°C	-25 ... +80
protection type IP • of the terminal • of the enclosure		IP20 IP40
Operating voltage • at 50 Hz / at AC / rated value • at 60 Hz / at AC / rated value • for DC • rated value	V	6 ... 230
	V	6 ... 230
	V	6 ... 230
	V	6 ... 230
Suitability for integration • pressure selection button • front element • suspension switch • suspension pushbutton		Yes
		Yes
		Yes
		Yes
Insulation voltage / rated value	V	400
Impulse voltage resistance / rated value	kV	4
Product component • fluorescent materials • diode • lamp transformer • series resistance		Yes
		No
		No
		Yes
Mounting type		front mounting
Width	mm	10
Height	mm	30
Depth	mm	21.2

Connections/ terminals:

Type of the connectable conductor cross-section

• for auxiliary contacts / solid	2x (0.25 ... 1.5 mm ²)
• for auxiliary contacts / finely stranded / with conductor end processing	2x (0.25 ... 0.75 mm ²)
• for auxiliary contacts / finely stranded / without conductor final cutting	2x (0.25 ... 1.5 mm ²)
• for AWG conductors / for auxiliary contacts	2x (24 ... 16)

Certificates/ approvals:

General Product Approval		Declaration of Conformity	other	
				Confirmation Environmental Confirmations
CCC	CSA		EG-Konf.	

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SB3403-1C/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SB3403-1C

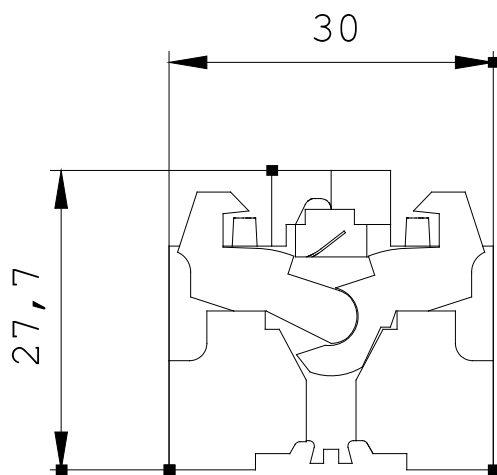

\P
\P

last change:

Jul 7, 2014